


Model: GOPW3200HB2

Sunlight Readable High Brightness Open Frame wide 32" LCD monitor, 1920 x 1080 , 1500 nits
VGA, DVI, 100~240V AC-in, black painted metal, Operating Temperature -10 ~ 50C

**Super
Brightness
1500nits**

31.5" Open frame monitor is designed for commercial and industrial applications at outdoors and indoors, such as kiosks, digital signage, military, security, industrial equipment, and instrumentation equipment. This product can provide high brightness / contrast to achieve better viewing effect and good reliability at wide environments conditions.

Features highlights:

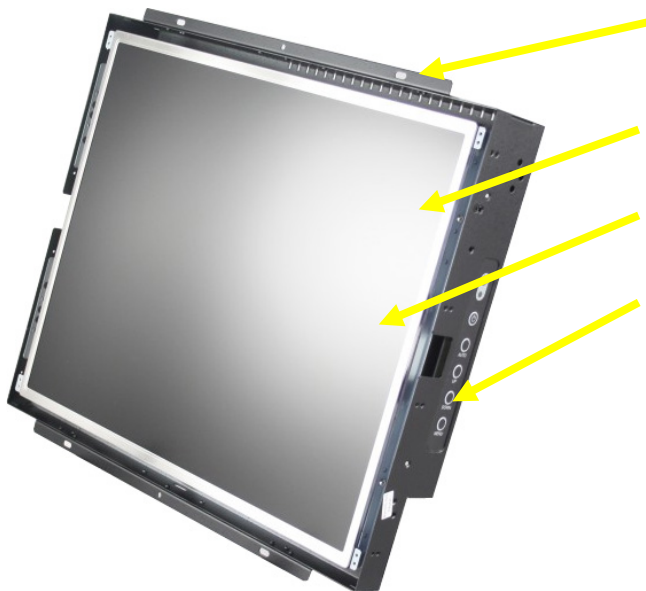


Easy to Mount Open Frame, metal chassis
(top & bottom flanges)

Optional for Resistive/ Capacitive/ SAW/ IR/ Projective
Capacitive Touch screen

Auto Video Signal ON / OFF
Auto Always Power On

Side OSD buttons can prevent unnecessary setting
changes.

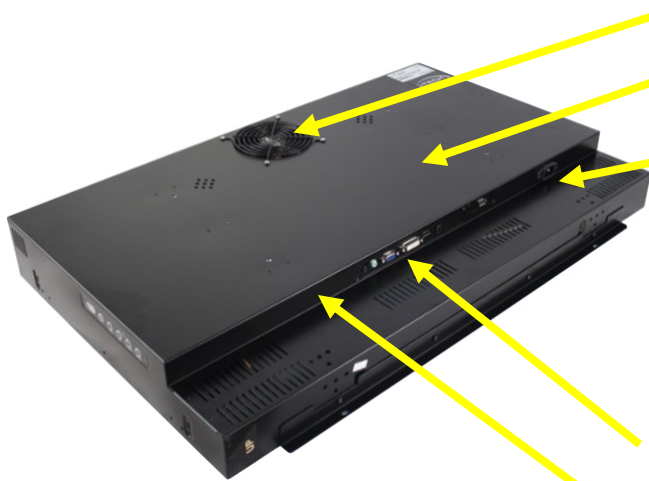

Ultra low speed/Noise fan for extra cooling
(24" LCD or above)

VESA Mounting Hole Pattern

Reliable built-in Power supply for 15" or above
(Optional for 9-36V DC input)



Standard VGA Input
(Optional for DVI, HDMI, AV, BNC, AV looping and SDI)

Optional for RS232 Remote Control Protocol: Command
Code to set system

Photo Gallery:



Features:

- 1500 nits sunlight readable display.
- LED backlight, low power consumption
- Full HD (1920 x 1080 pixels) resolution
- RoHS Compliance
- 5 keys OSD controls
- VGA ,DVI , and HDMI Video Input and auto detection video system.
- Quick and easy integrations for Client solutions
- Option for auto light sensor
- Option for RS232 port OSD function control


Specification:

Item	Specification	Unit	Note
LCD panel	Active screen size	698.4 (H) x 392.85(V)	mm
	Resolution	1920(H) x 1080(V)	pixels
	Pixel pitch(Sub Pixel)	0.3637(H) x 0.3637(V)	mm
	Pixel arrangement	RGB vertical stripe	
	Display mode	MVA mode, normally black	
	Display colors	16.7 M (RGB 8-bit)	colors
	Brightness	1500	nits
	Contrast Ratio	1100 : 1	
	Response time	10 ms (G to G)	
Aspect Ration	16 : 9		
Graphic	Input Connector	D-Sub 15 pins, DVI, HDMI	
Audio	Speaker	5W -R/L (Option)	
Power	Power Input	100~240	VAC
Power consumption	Operation Mode	120 (max)	W
	Saving Mode	5 (max)	W
Physical	Dimension	Reference to drawing	mm
	Weight	15(max)	KG
Environment	Operating Temperature	-10 ~ 50	°C 1
	Storage Temperature	-20 ~ 60	°C 2
Reliability	Backlight MTBF	50,000	hours
	Warranty	12	month
	ON / OFF cycle	36,000	cycle
DCC	Plug & Play	DDC 2B Compliance	
Function	OSD key	5 keys(Power ,Enter ,▲ ,T ,Menu)	
	Wall mount (option)	VESA standard 200x200	mm

Note 1: -20°C operation is still OK at system condition.

Note 2: The unit should not be exposed to corrosive chemicals.

Mechanical Drawing:

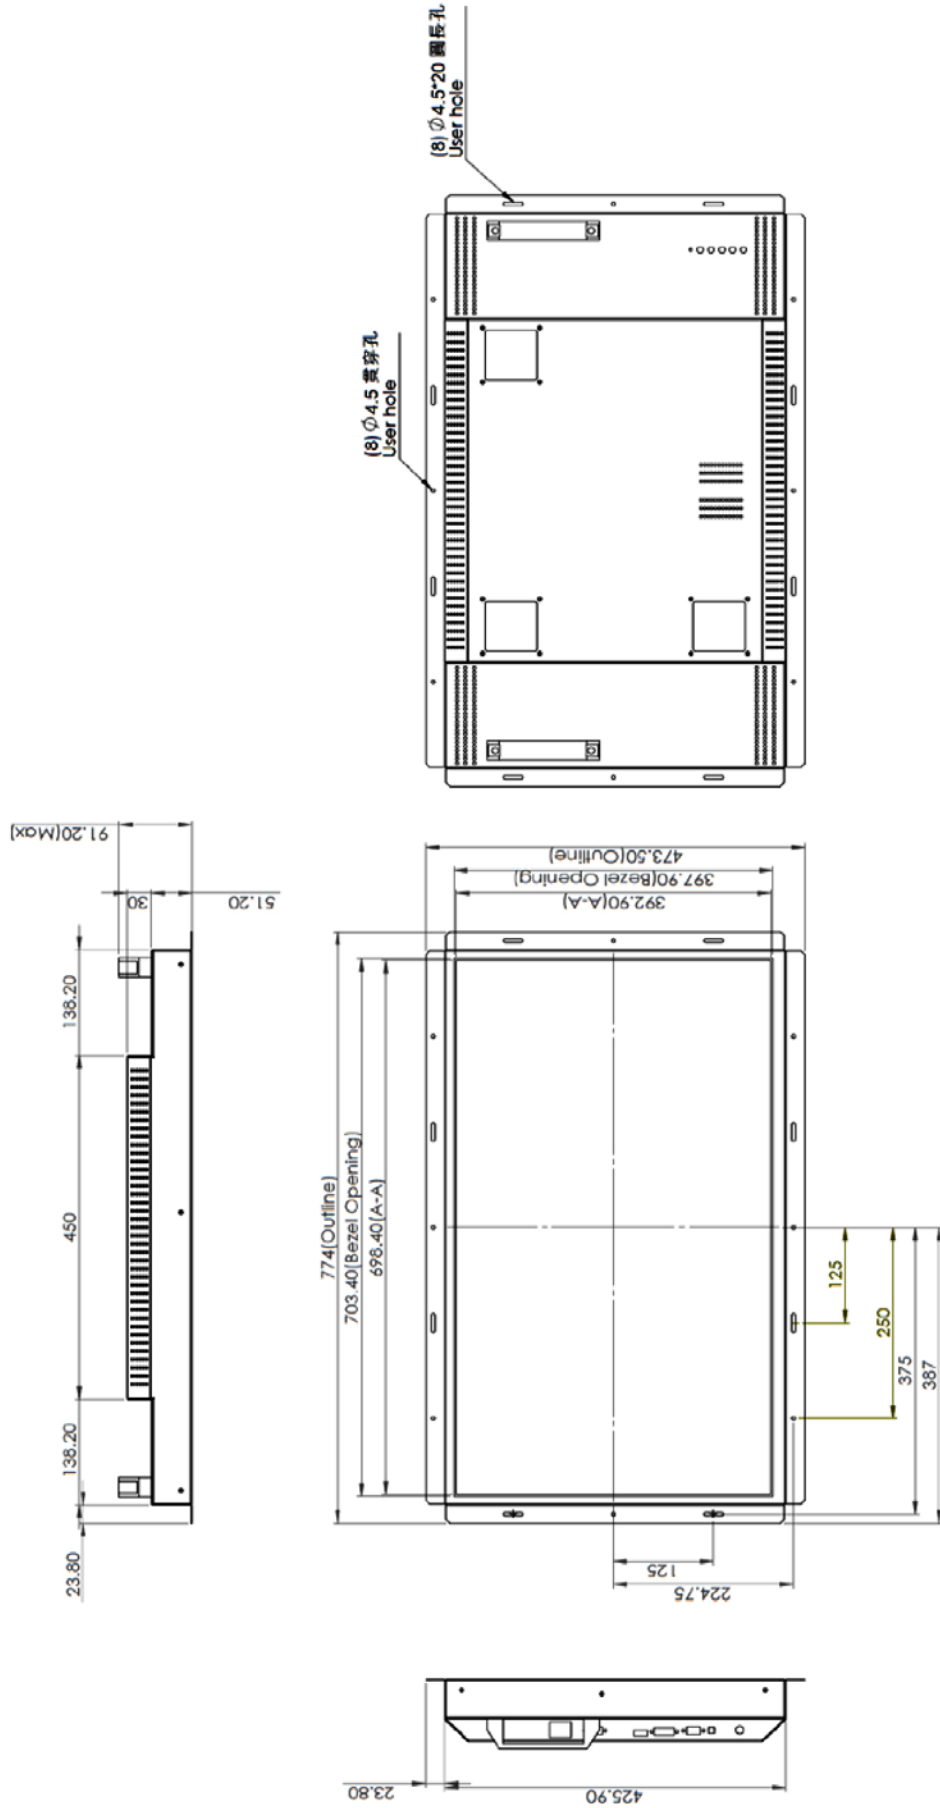

LCD Options:



LED Backlight Options

Introducing LED backlight options for monitors for energy efficiency and a brighter screen.



TouchScreen Options

Our LCD has a wide selection option to choose which touchscreen technology suits for you.


	Four-Wire Resistive	Five-Wire Resistive	Pen Touch	Capacitive	Surface Wave(Saw)	Infrared Touch (Ir)
PRODUCT SIZE	1.7" - 24"	10.4" - 24"	15" - 19"	12" - 24"	10.4" - 30"	10.4" - 42"
TOUCH LIFE	1 - 2 million touches	30 - 35million touches	100 million touches	100 million touches	50 million touches	Long-term reliability
SCRATCH RESISTANCE	Hard Coated	Hard Coated	Hard Coated (SiO ₂)	Hard Coated (SiO ₂)	Glass Overlay Moh's hardness rating of 7	Glass Overlay Moh's hardness rating of 7
CONTAMINANT RESISTANCE	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers
INPUT METHOD	Finger, Gloved Hand, Stylus	Finger, Gloved Hand, Stylus	Stylus Pen	Finger	Finger, Gloved Hand, Soft pliable stylus	Finger, Gloved Hand, Stylus
CONTROLLER	USB, RS232	USB, RS232	USB, RS232	USB, RS232	USB, RS232	USB, RS232



VIDEO Input Options:

For Video inputs options:

DVI, DVI+HDMI, SVideo+AV, SVideo+AV+DVI, AV+Looping, DVI+AV+Looping, HD-SDI, BNC(PAL/NTSC)



Optical Bonding Options

- Optical Bonding provides the best reduction of ambient light washout of any commercially available enhancement technology.
- Optical Bonding has a lower cost than most other competing technologies.
- Optical Bonding offers superior ruggedization, enhancing the display durability under vibration, shock and other environmental extremes.



RS-232 Remote Control Options

Remote Control Protocol: Command Code to set system



9-36V DC Input Options

iTech offers a selection of DC input from 9V to 36V



Light Sensor and Motion Sensor Options

iTech LCD offers Light and Motion Sensor

Privacy Filter

Front Glass Options:

- Anti Reflective AR Glass 3mm
- Anti Reflective AR Glass 6mm Vandal-Resistance
- Anti Reflective AR Glass 8mm Vandal-Resistance
- Anti Glare AG Glass 3mm



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com