

IP-PoE Monitor (16CH)

23.8" 16CH-IP Monitor (Full HD) 16:9; 1920x1080;250nit; 3000:1;
 LED Backlight; RJ45x1(10/100M); VGA*1;DVI-D*1;Full HD*1;
 Audio R/L*1;Mouse*1;Metal case; Bracket (max. 16ch IP
 CAMERA support)



MODEL: HIPW2380-16PoE


FEATURES:

H.265	ONVIF	RTSP	Dual Stream Support	Mouse	GUI	SEQ	LED	Bracket
MAX. 16CH	PoE	24H	OSD	Speaker	Metal Case	PTZ Support	Record Support	VESA

OPTIONS:

No PoE	Color Option	Touch
Rack mount	Anti-Glare AG Glass	

DIAGRAM

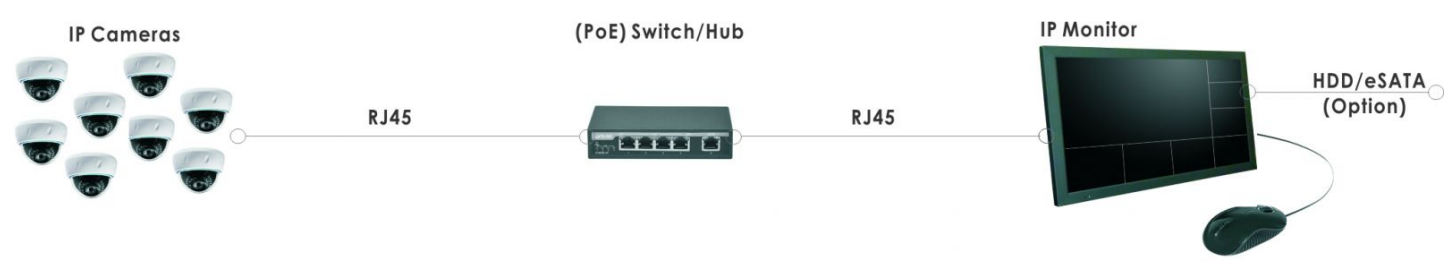

INTERFACE

DC 12V IN	ETHERNET	USB 1 IN	USB 2 IN	DVI-D IN	HDMI 1 IN	VGA IN	Audio L R	Earphone Out	eSATA Port

SPECIFICATIONS:

LCD Panel	23.8"
Viewable area	527.04 x 294.16
Profile Ratio	16 : 9
Max. Resolution	1920 x 1080
Display Colors	16.7M
Brightness	250 cd/m2
Contrast	3000 : 1
Response Time	1.5/3.5 ms
View Angle	89/89/89/89
Full HD Input	1xHDMI (Type A)
Audio Input(R/L)	2xRCA
PC Input	1xVGA Input/1xDVI Input
Earphone Out	1xPhone Jack 3.5ψ
Speaker	2xBuilt-in Speaker (2w)
IP Video Support	16CH(2592x1944)/8CH(2592x1944)/4CH(2592x1944)
Network Port	1xRJ45,10/100M
USB Port	2xUSB 2.0 ports
PoE Power Source	PoE RJ45 Ethernet Cable
PoE Input DC Range	36VDC to 57 VDC(Complies with IEEE802.3at/4-Pairs) (Required PoE Device up to 40W)
Power Input(No PoE)	AC 100-240V 50/60Hz ,Adaptor DC 12V/5A
Power Consumption	Approx. 27 Watt
Housing	Metal Frame/ Casing
Dimension(mm)	575.9 x 347.8 x 56.7
Weight(kgs)	5.6 kgs
Operating Temperature	0~50 °C