

# IP-PoE Monitor (32CH)

23.8" 32CH-IP Monitor (Full HD) 16:9; 1920x1080;250nit; 3000:1;  
 LED Backlight; RJ45x2(10/100M); VGA\*1;DVI-D\*1;Full HD\*1;  
 Audio R/L\*1;Mouse\*1;Metal case; Bracket (max. 32ch IP  
 CAMERA support)



## MODEL: HIPW2380-32PoE


### FEATURES:

H.265	ONVIF	8MP Support	RTSP	Dual Stream Support	Mouse	GUI	SEQ	LED	Bracket
MAX. 32CH	PoE	24H	OSD		Metal Case	PTZ Support	Record Support	VESA	

### OPTIONS:

No PoE	Color Option	Touch
Rack mount	Anti-Glare AG Glass	

### DIAGRAM

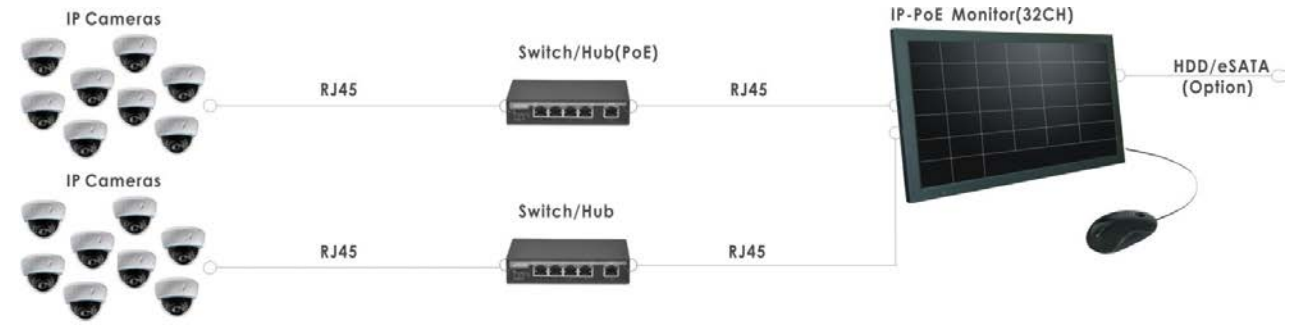

### INTERFACE

DC12V IN	ETHERNET 1	ETHERNET 2	USB 1 IN	USB 2 IN	DVI-D IN	HDMI 1 IN	VGA IN	Audio L R	Earphone Out	eSATA Port
----------	------------	------------	----------	----------	----------	-----------	--------	-----------	--------------	------------

## SPECIFICATIONS:

LCD Panel	23.8"
Viewable area	527.04 x 294.16
Profile Ratio	16 : 9
Max. Resolution	1920 x 1080
Display Colors	16.7M
Brightness	250 cd/m2
Contrast	3000 : 1
Response Time	1.5/3.5 ms
View Angle	89/89/89/89
Full HD Input	1xHDMI (Type A)
Audio Input(R/L)	2xRCA
PC Input	1xVGA Input/1xDVI Input
Earphone Out	1xPhone Jack 3.5ψ
Speaker	2xBuilt-in Speaker (2w)
IP Video Support	32CH(2592x1944) / 25CH(2592x1944) 16CH(3840x2160) / 8CH(3840x2160) / 4CH(3840x2160)
Network Port	2xRJ45,10/100M
USB Port	2xUSB 2.0 ports
PoE Power Source	PoE RJ45 Ethernet Cable
PoE Input DC Range	36VDC to 57 VDC(Complies with IEEE802.3at/4-Pairs) (Required PoE Device up to 40W)
Power Input(No PoE)	AC 100-240V 50/60Hz ,Adaptor DC 12V/5A
Power Consumption	Approx. 24 Watt
Housing	Metal Frame/ Casing
Dimension(mm)	586 x 353.8 x 61.6
Weight(kgs)	5.8 kgs
Operating Temperature	0~50 °C