

IP-PoE Monitor (32CH)

32" 32CH-IP Monitor (Full HD) 16:9; 1920x1080;400nit; 3000:1; LED Backlight; RJ45x2(10/100M); VGA*1;DVID*1; Full HD*1; Audio R/L*1;Mouse*1; Metal case; Bracket (max. 32ch IP CAMERA support)



MODEL: HIPW3200-32PoE


FEATURES:

H.265	ONVIF	8MP Support	RTSP	Dual Stream Support	Mouse	GUI	SEQ	LED	Bracket
MAX. 32CH	PoE	24H	OSD		Metal Case	PTZ Support	Record Support	VESA	

OPTIONS:

No PoE	Color Option
Rack mount	AG Glass

DIAGRAM

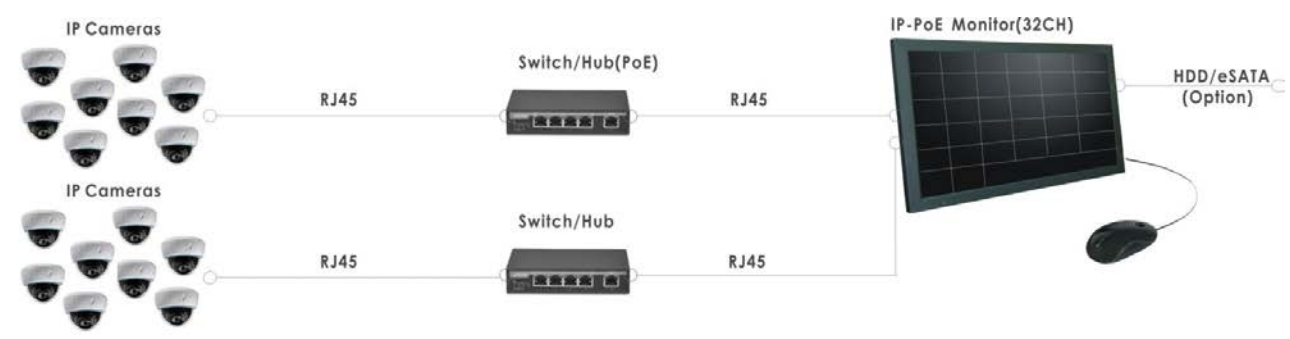

INTERFACE

DC12V IN	ETHERNET 1	ETHERNET 2	USB 1 IN	USB 2 IN	DVI-D IN	HDMI 1 IN	VGA IN	Audio L R	Earphone Out	eSATA Port
----------	------------	------------	----------	----------	----------	-----------	--------	-----------	--------------	------------

SPECIFICATIONS:

LCD Panel	32"
Viewable area	698.4 x 392.8
Profile Ratio	16 : 9
Max. Resolution	1920 x 1080
Display Colors	16.7M
Brightness	400 cd/m2
Contrast	4000 : 1
Response Time	8 ms
View Angle	89/89/89/89
Full HD Input	1xHDMI (Type A)
Audio Input(R/L)	2xRCA
PC Input	1xVGA Input/1xDVI Input
Earphone Out	1xPhone Jack 3.5ψ
Speaker	2xBuilt-in Speaker (2w)
IP Video Support	32CH(2592x1944) / 25CH(2592x1944) 16CH(3840x2160) / 8CH(3840x2160) / 4CH(3840x2160)
Network Port	2xRJ45,10/100M
USB Port	2xUSB 2.0 ports
PoE Power Source	PoE RJ45 Ethernet Cable
PoE Input DC Range	36VDC to 57 VDC(Complies with IEEE802.3at/4-Pairs) (Required PoE Device up to 40W)
Power Input(No PoE)	AC 100-240V 50/60Hz
Power Consumption	Approx. 35 Watt
Housing	Metal Frame/ Casing
Dimension(mm)	761.6 x 455.2 x 93.5
Weight(kgs)	11.6 kgs
Operating Temperature	0~50 °C