




Front View



Side View

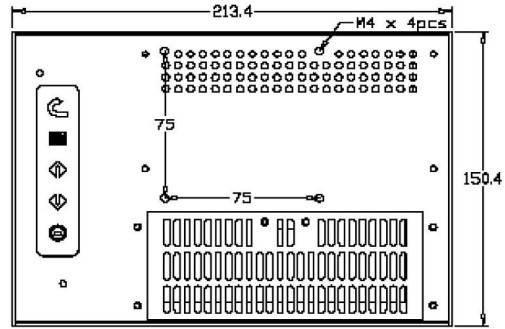

Rear View

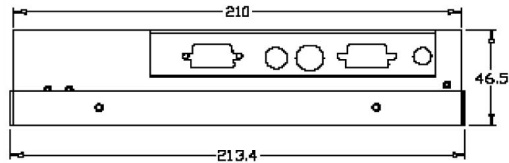

Bottom View

LCD Screen

LCD Type	Grade A industrial TFT LCD Panel
Display Size	6.4 inch diagonal (129.6H x 97.44V)
Resolution	640 x 480, VGA
Display Color	262,144 color
Brightness	300 cd/m ²
Contrast Ratio	180 : 1 (Typical)
Pixel Pitch	0.203 x 0.203 mm
Viewing Angle	55 / 55 / 15 / 35 (L / R / U / D)
OSD Control	Brightness, Contrast, Phase & Clock, Color, H & V position, Auto-tune & Recall
VGA Connector	D-Sub 15 pin VGA analog
Video Input	S-Video and Composite
LCD LLT.	20,000 hrs
Mounting	Panel, wall-mount or VESA arm
Dimension	213.4(W) x 150.4(H) x 46.5(D) mm
Weight	1 kg (Net) / 3 kg (Gross)
Packing	480(L) x 362(W) x 85(H) mm

Touch Screen

Type	Resistive	Surface Wave
Thickness	2mm	3mm
Light transmission	82%	90%
Controller Interface	Serial / USB	Serial / USB
Durability	35 Million	50 Million
OS Support	Windows XP, 2000, NT, 98, DOS and Linux	

External Power Adapter

AC Input	110V ~ 220V AC Input
DC Input	12V@3A Output
AC Cable Length	180cm
DC Cable Length	182cm
Size	108(L) x 64(W) x 30(H) mm

Safety Approval

Environmental

Operating Temperature	-20 to 70°C
Storage Temperature	-30 to 70°C
Humidity	95%, non condensing
Shock	49G peak acceleration (11ms, half sine wave)
Vibration	58~500Hz/0.98G (11min/cycle)

Ordering Information

Model	Description
iDP-600	6.4" Display Panel
iDP600-TRS	6.4" DP w/ Res. touch screen (Serial)
iDP600-TRB	6.4" DP w/ Res. touch screen (USB)
iDP600-TWS	6.4" DP w/ Wave touch screen (Serial)
iDP600-TWB	6.4" DP w/ Wave touch screen (USB)
iDP-600AV	6.4" Display Panel w/ Video Input
iDP600AV-TRS	6.4" DP w/ Video, Res. touch screen (Serial)
iDP600AV-TRB	6.4" DP w/ Video, Res. touch screen (USB)
iDP600AV-TWS	6.4" DP w/ Video, Wave touch screen (Serial)
iDP600AV-TWB	6.4" DP w/ Video, Wave touch screen (USB)