


Aluminum True Flat Front Touch Panel PC

10.4" Aluminum Front Bezel True Flat Touch Panel PC, True flat 5W touch screen, J1900, 1 x VGA, 1 x HDMI, 1 x RS232, 4 x USB, 2 x LAN, 1 x 12V DC in, VESA mounting & panel mount, resolution: 1024 x 768 dpi

Model: KPC1040X-J-FTR

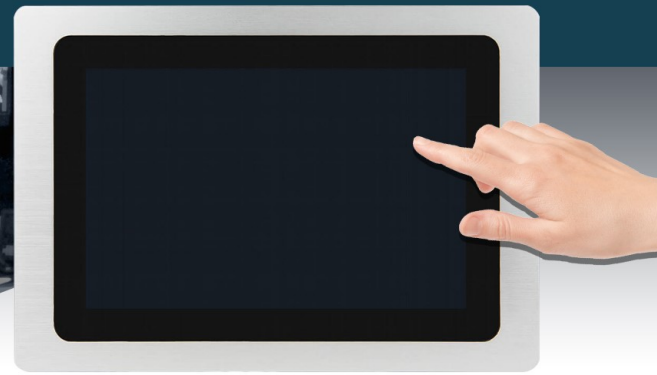

FEATURES:

- Fanless design and compact solution
- Intel Bay Trail Quad Core 2.0GHz CPU
- Resolution 800 x 600 & 1024 x 768 dpi
- 5 wires resistive / PCAP touch solution
- IP65 Silver aluminum front bezel
- Various Sunlight Readable High Brightness Panel for choose
- 2 x LAN, 1 x VGA, 1 x HDMI, 4 x USB, 1 x RS232
- Panel mount & VESA mounting & Clips

SPECIFICATIONS:

System	
CPU	Intel Bay Trail D-J1900 2.0GHz Quad Core Processor (On Board)
Memory	1 x 204-pin DDR3L SODIMM up to 8GB
H/W Monitor	
Watchdog Timer	256-Level Watchdog Timer
I/O Ports	
RS232	1
GLAN	2
USB	4x USB 2.0
VGA	1
HDMI	1
Storage	
Storage	1 x SATA 2.0 2.5" HDD/SSD
Expansion	
Mini-PCle	2 x Full-size (one w/ mSATA)
Power Requirement	
Power Input Voltage	DC in 12V /19V /24 V
Touch Screen	
Touch screen	5-wire resistive
OS support	
Win Pro 7,8,10 ; Embedded Win 7, 8,10	

Display	
Size	10.4" TFT (4:3)
Resolution	1024 x 768
Colors	16.2M
Luminance (cd/m ²)	350
Contrast Ratio	1200:1
View Angle (H / V)	176/176
Mechanical & Environmental	
Operation Temp	0 ~ 45°C
Storage Humidity	10 ~ 90%, non-condensing
Mount	Clip mount, Panel mount & VESA mounting(75X75mm)
Dimension (W x H x D mm) & Weight	297 x 240 x 59.8(3kg)
Optional	
RS232	1
External antenna	1 or 2
Waterproof Sponge	1
Clip	8
No Touch Screen	1

Optional High Brightness Panel				
Resolution	800 x 600	800 x 600	800 x 600	1024 x 768
Color	262K	16.2M	16.2M	16.2M
Luminance(cd/m ²)	1000	2000	1600	1000
Contrast Ratio	1000 : 1	400:1	400:1	800:1
Viewing Angle (H/V°)	178/178	130/110	130/110	176/176

MECHANICAL DRAWINGS:

