


Aluminum True Flat Front Touch Panel PC

21.5" Aluminum Front Bezel True Flat Touch Panel PC, True Flat PCT Touch screen, i3 4010U, 2 x HDMI, 2 x RS232, 4 x USB, 2 x LAN, 1 x 24V DC in, VESA mounting & panel mount, resolution: 1920 x 1080 dpi

Model: KPCW2150-i3-FPCAP

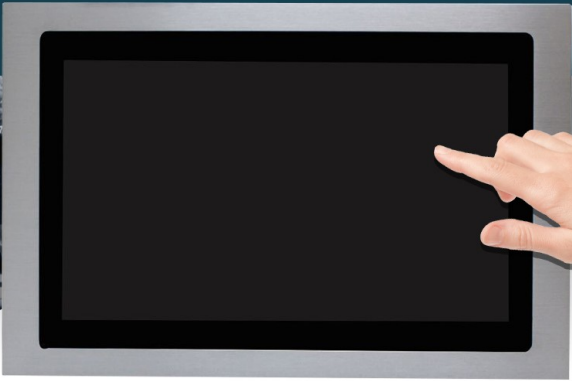

FEATURES:

- Fanless design and compact solution
- 4th Gen Intel i3 CPU
- Resolution 1920 x 1080 dpi
- PCAP touch solution
- IP65 Silver aluminum front bezel
- Various Sunlight Readable High Brightness Panel for choose
- 4 x USB, 2 x HDMI, 2 x LAN, 1 x RS232
- Panel mount & VESA mounting & Clips

SPECIFICATIONS:

System	
CPU	4th Gen Intel Core HSW ULT i3 4010U CPU (On Board)
Memory	2 x 204-pin DDR3L SODIMM up to 16GB
H/W Monitor	
Watchdog Timer	Watch Dog Timer 256 Level
I/O Ports	
RS232	1
GLAN	2
USB	2 x USB 2.0; 2x USB3.0
HDMI	1
Line-Out / Mic In	1
Storage	
Storage	1 x SATA 2.0 2.5" HDD/SSD
Expansion	
Mini-PCIe	1 x Full-size (one w/ mSATA)
Power Requirement	
Power Input Voltage	DC in 12V or 19~24V
Touch Screen	
Touch screen	PCAP
OS support	
Win Pro 7,8,10 ; Embedded Win 7, 8,10	

Display	
Size	21.5" TFT (16:9)
Resolution	1920 x 1080
Colors	16.7M
Luminance (cd/m2)	300
Contrast Ratio	3000:1
View Angle (H / V)	178/178
Mechanical & Environmental	
Operation Temp	0 ~ 45°C
Storage Humidity	10 ~ 90%, non-condensing
Mount	Clip mount, Panel mount & VESA mounting(100X100mm)
Dimension (W x H x D mm) & Weight	607x395x72.8(15kg)
Optional	
RS232	2
External antenna	1 or 2
Waterproof Sponge	1
IP66 front Bezel with Oring	1
Clip	10
No Touch Screen	1

Optional High Brightness Panel	
Resolution	1920 x 1080
Color	16.7M
Luminance(cd/m2)	1600
Contrast Ratio	900 : 1
Viewing Angle (H/V°)	178/178

MECHANICAL DRAWINGS:

