

Rack mountable Video LCD Monitor

4U 2 x 8" 1027 x 768 Rack Mount Series input 250nits, BNC x 2 input, VGAX1 In, S-Video input x 1, Tally input x 1

Model: MRS-4280




SPECIFICATIONS

LCD Type	8" TFT Active Matrix Panel
Brightness	250 cd/m ²
Contrast Ratio	700 : 1 □
Response Time	20 msec
Viewing Angle	100° (H) / 140° (V) □
Display Colors	16.7M Colors □
Resolution	1024 x 768 pixels (4:3) □
Input (per screen)	1 x D-SUB : VGA In 1 x Mini Din : S-Video Input 2 x BNC : Analog Input 1 x D-SUB (9 pin) : Tally input □
Output (per screen)	1 x BNC : Composite (CVBS)
Input Signal	Analog: Composite (CVBS) / S-Video 0.8Vpp □ VGA: 640 x 350 (70/ 85) , 720 x 350 (70/ 85) 640 x 400 (56/ 70/ 85) , 720 x 400 (70/ 85) 640 x 480 (60/ 66/ 72/ 75/ 85) 800 x 600 (56/ 60/ 70/ 72/ 75/ 85) 1024 x 768 (60/ 70/ 72/ 75/ 85)
Power Adapter	AC 100 ~ 240V , 50/60Hz □
Power Consumption	36 Watts
Temperature	Operation : 0°C ~ +50°C , Storage : -10°C ~
Dimension	483 x 175 x 114 mm (4U) □
Gross Weight	6 Kg + 200 g □



MECHANICAL DRAWINGS:

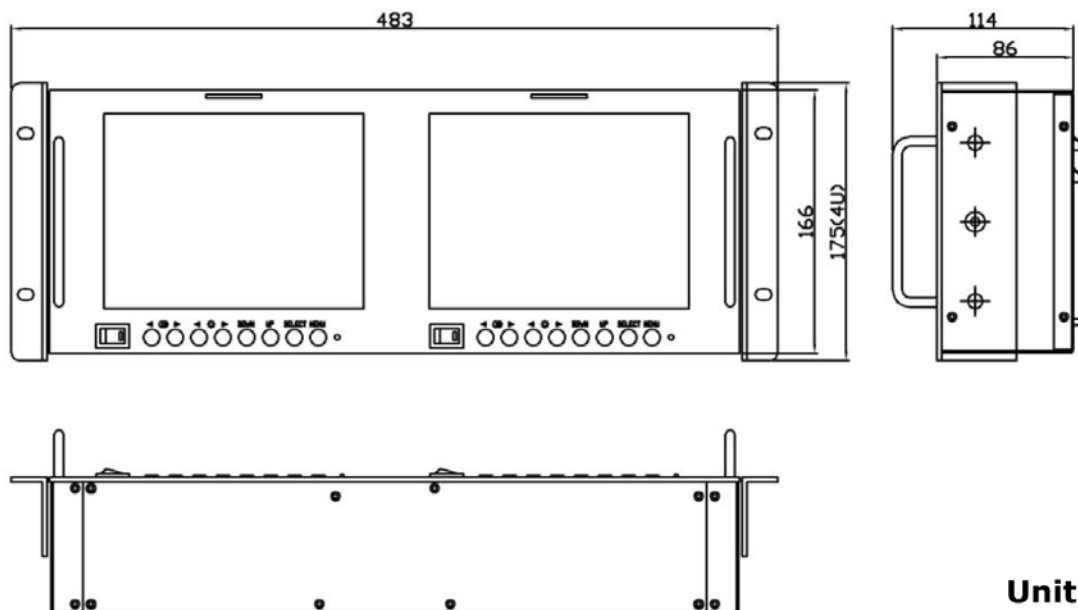

Unit : mm