

Interactive Digital Signage Kiosk

32" Interactive Digital Signage Kiosk Intel® Pentium G850 2.9GHz CPU, 1920x1080 dpi, 350nits with tempered glass

(Model: MSB3200PCPT-G)



Feature

- Slim profile for space-constricted environments
- Double side interactive display possible
- Modular design reduce total cost of ownership
- Compact and flexible mounting solution: Standalone and wall mount

Experience

- Information Kiosk in Mall / Department Store / Hospital
- Ticketing Kiosk in Movie Theater / Golf Club
- Stored Value Kiosk in Membership Club/ Theme Park
- Coupon Dispensing Kiosk in Mall / Supermarket

Specifications

Processor System	CPU (Socket FCLGA1155)	Intel® Pentium G850
	Frequency	2.9GHz
	L3 Cache	3M
	Main Board	PC67H
	System Chipset	Intel® BD82H77/Q77 FCBGA942
	BIOS	AMI 64-Mbit SPI Flash BIOS
Memory	Technology	DDR3 1333/1600 MHz
	Max. Capacity	8GB
	Socket	2 x 240-pin DIMM
Panel Size	31.5"	
Resolution	1920x1080	
Viewing Angle	Right : 89 / Left : 89 / Upper : 89 / Lower : 89 degree	
Brightness	350 cd/m ²	
Color Support	16.7M	
Contrast Ratio	3000	
Response Time	6.5 ms	

Peripheral & Storage Devices

Drive Bay	2.5" HDD SATA interface
Option Device	Tempered Glass
	IR Multi-Touch Screen
	Slim DVD-ROM drive or equivalent devices
	Wireless LAN

Mechanical / Environmental

Construction	Body: heavy-duty steel Profiles: aluminum alloy
Kiosk Design Customizable	

Options



Wifi



1D/2D Bar Code Scanner



GPRS/3G



Digital Signage Software



RFID/Mifare



Motion Sensor



IC Card / MSR




IP65



2"/"3"/4" Thermal Printer

Fully Integrated I/O

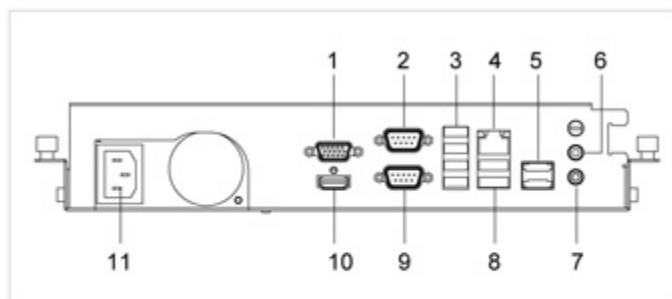

1. VGA

2. COM2

3. USB 2.0 x4

4. LAN

5. ESATA

6. Speaker out

7. MIC in

8. USB 3.0 x2

9. COM1

10. Digital Display

11. AC input




i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com



Dimensions

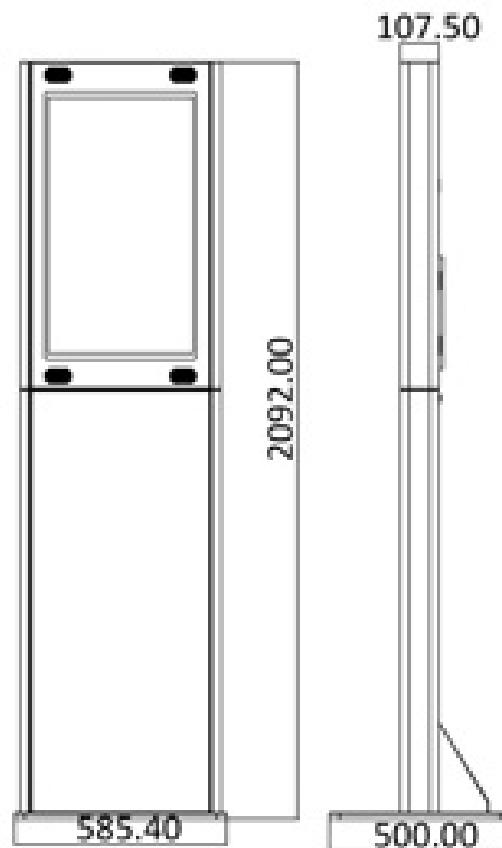

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com