

32" Interactive Digital Signage Kiosk Intel® i3-3220 3.3GHz CPU, 1920x1080 dpi, 350nits with tempered glass

(Model: MSB3200PCi3-G)



Feature

- Slim profile for space-constricted environments
- Double side interactive display possible
- Modular design reduce total cost of ownership
- Compact and flexible mounting solution: Standalone and wall mount

Experience


- Information Kiosk in Mall / Department Store / Hospital
- Ticketing Kiosk in Movie Theater / Golf Club
- Stored Value Kiosk in Membership Club/ Theme Park
- Coupon Dispensing Kiosk in Mall / Supermarket

| Specifications | | |
|------------------|---|-----------------------------|
| Processor System | CPU (Socket FCLGA1155) | Intel® I3-3220 |
| | Frequency | 3.3GHz |
| | L3 Cache | 3M |
| | Main Board | PC67H |
| | System Chipset | Intel® BD82H77/Q77 FCBGA942 |
| | BIOS | AMI 64-Mbit SPI Flash BIOS |
| Memory | Technology | DDR3 1333/1600 MHz |
| | Max. Capacity | 8GB |
| | Socket | 2 x 240-pin DIMM |
| Panel Size | 31.5" | |
| Resolution | 1920x1080 | |
| Viewing Angle | Right : 89 / Left : 89 / Upper : 89 / Lower : 89 degree | |
| Brightness | 350 cd/m ² | |
| Color Support | 16.7M | |
| Contrast Ratio | 3000 | |
| Response Time | 6.5 ms | |


| Peripheral & Storage Devices | |
|------------------------------|--|
| Drive Bay | 2.5" HDD SATA interface |
| Option Device | Tempered Glass |
| | IR Multi-Touch Screen |
| | Slim DVD-ROM drive or equivalent devices |
| | Wireless LAN |

| Mechanical / Environmental | |
|----------------------------|--|
| Construction | Body: heavy-duty steel Profiles: aluminum alloy |
| Kiosk Design Customizable | |

Options

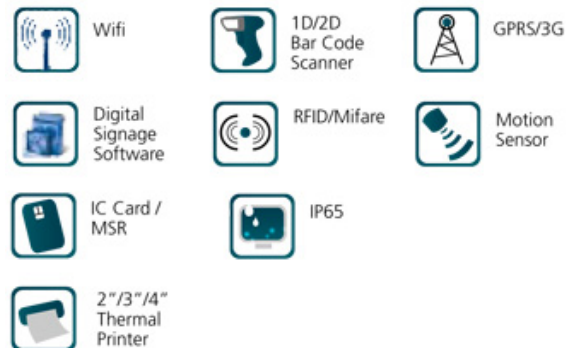

Fully Integrated I/O

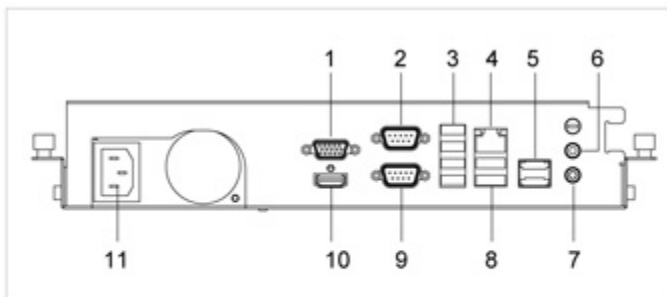

- | | | |
|---------------|----------------|---------------------|
| 1. VGA | 5. ESATA | 9. COM1 |
| 2. COM2 | 6. Speaker out | 10. Digital Display |
| 3. USB 2.0 x4 | 7. MIC in | 11. AC input |
| 4. LAN | 8. USB 3.0 x2 | |





Dimensions

