

RUGGED MILITARY

Rugged Military Grade front IP65 24" TFT LCD display

Aluminium front bezel 1920 x 1200 resolution
350nits brightness Standard port for VGA and DVI Support
panel mount and VESA wall mount 1 x 100~240V AC-DC
power adapter Meet MIL-STD-810F 0-60C,
storage at -20C to 80C, Shock 810F, Vibration 810F




Model: **NCHW2400X-Mil**

FEATURES:

- Rugged Military 24" LCD
- Res: 1920 x 1200 FHD
- 350nits brightness
- Contrast Ratio 2000:1
- Widescreen

MECHANICAL:

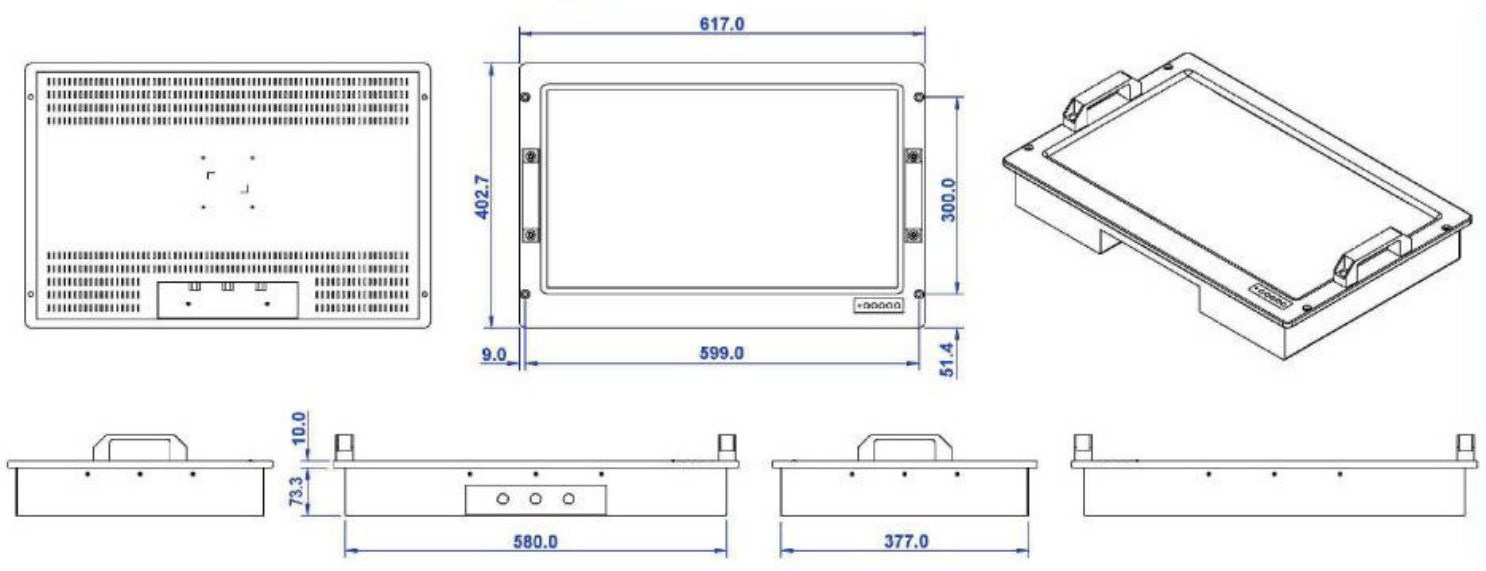

Cut-out Size : 582 x 379 mm



i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

SPECIFICATIONS:

LCD Display Grade	
LCD Size	10.4" Active Matrix TFT LCD
Resolution	1920 x 1200 Full HD resolution
Aspect Ratio	16:9 wide screen
Luminance	350 cd/m2
Color Depth	16.7 M colors)
View Angle	85(L) / 85(R) / 85(U) / 85(D) degree
Contrast Ratio	2000 : 1 (Dynamic Contrast Ratio)
Backlight life	50,000 Hours at 25°C ambient temperature
Touch Screen	
Touch Screen	Optional for extra cost
Resolution	
I/O Interface	
VGA	Military circular connector (to VGA) connector (USB for touch) Optional (RS232 for touch)
RS232 for Touch	
Touch USB	Military circular connector (USB for Touch)
Other features	Other features available at your request
Mechanical	
Front Bezel	Solid Aluminum front bezel
Construction	Rugged stainless steel construction
Standard Color	Black paint color
Mounting Method	
Wall-Mount	Support VESA-100 wall mounting
Mounting Kit	Mounting Kit is available at extra cost
OSD	
OSD Control Buttons	Control Menu, Dimming, brightness. Control etc.
Dimming Range	Dimming range from 100% to 0% in 100 steps

IP-65 Rate	
Front Side	IP-65 Water-proof on front side
Other Sides	IP-54 on other sides
Environmental	
Operate eTemperature	Meet MIL-STD-810F. 0°C to +60°C Meet
Storage Temperature	MIL-STD-810F. -20°C - +80°C Meet
Shock	MIL-STD-810F standard Meet
Vibration	MIL-STD-810F standard Meet CE. FCC,
CE, FCC, RoHS	RoHS compliant
Power Adapter	
Power Source	Around 55 Watts
Standby	2 watts Stand-by
Working	55 Watts in working

