


# RUGGED MILITARY LCD

**23" Rack-Mount LCD Monitor**  
**with 21.5" Display 1920 x 1080, 250 cd/m2,**  
**1 x USB for Touch, 1 x VGA, 1 x DVI and 1**  
**x Power input**

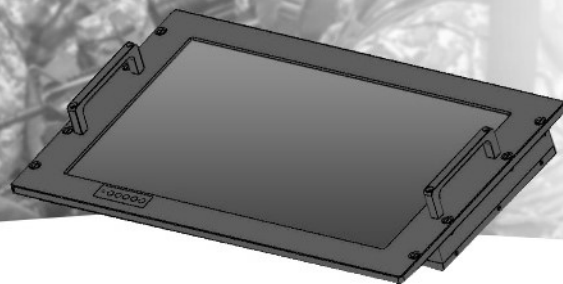

**Model: Nmil-W2150-SK01**

## SPECIFICATIONS:


LCD Display	LCD Panel	LCD Size : 21.5" chassis material stainless steel Backlight : LED backlight Resolution : 1920x1080 Brightness : 250 cd/m2 Contrast Ratio : 1000 : 1 View Angle : 89 / 89 / 89 / 89, >= 10:1 No. of Color : 8 bits, 16.7M
Brightness	Brightness	300cd/m2 (Without touch screen)
Touch Screen (Optional)	Touch/Glass	Resistive touch (USB interface)
Chassis	Chassis material	Stainless steel construction
	Front Bezel Handles	23" Rack-mountable aluminum front bezel with M6 captive screws Yes
	Ingress Protection	IP65 at front side
Control Keys and Indicators	On/Off, OSD in the front bezel	
Mounting	Mounting	Front mounting or VESA mounting
I/O Port	VGA	1 x Analog RGB Video Input
	DP	N/A
	HDMI	N/A
	DVI	1 x DVI-D Digital Input
	BNC	N/A
	HD-SDI	N/A
RS232	N/A	
Power	USB Power	1 x USB for Touch 1 x DC connector for DC power and DC heater
	Consumption	15-18W excluding heater ; 65-68W including heater (between +2 to +18 degree C)
	Operating Voltage	18VDC to 60V DC
	Nominal voltage	28V DC
Heater	Heater Module	Optional
Dimension	W x H x D	Please see the drawing above.
MIL-STD-704	Display unit shall operate satisfactorily under all the limits specified in MIL-STD-704	

*\*Specifications subject to change without notice, not responsible for typographical errors.*



**DRAWINGS FOR REFERENCE:**

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

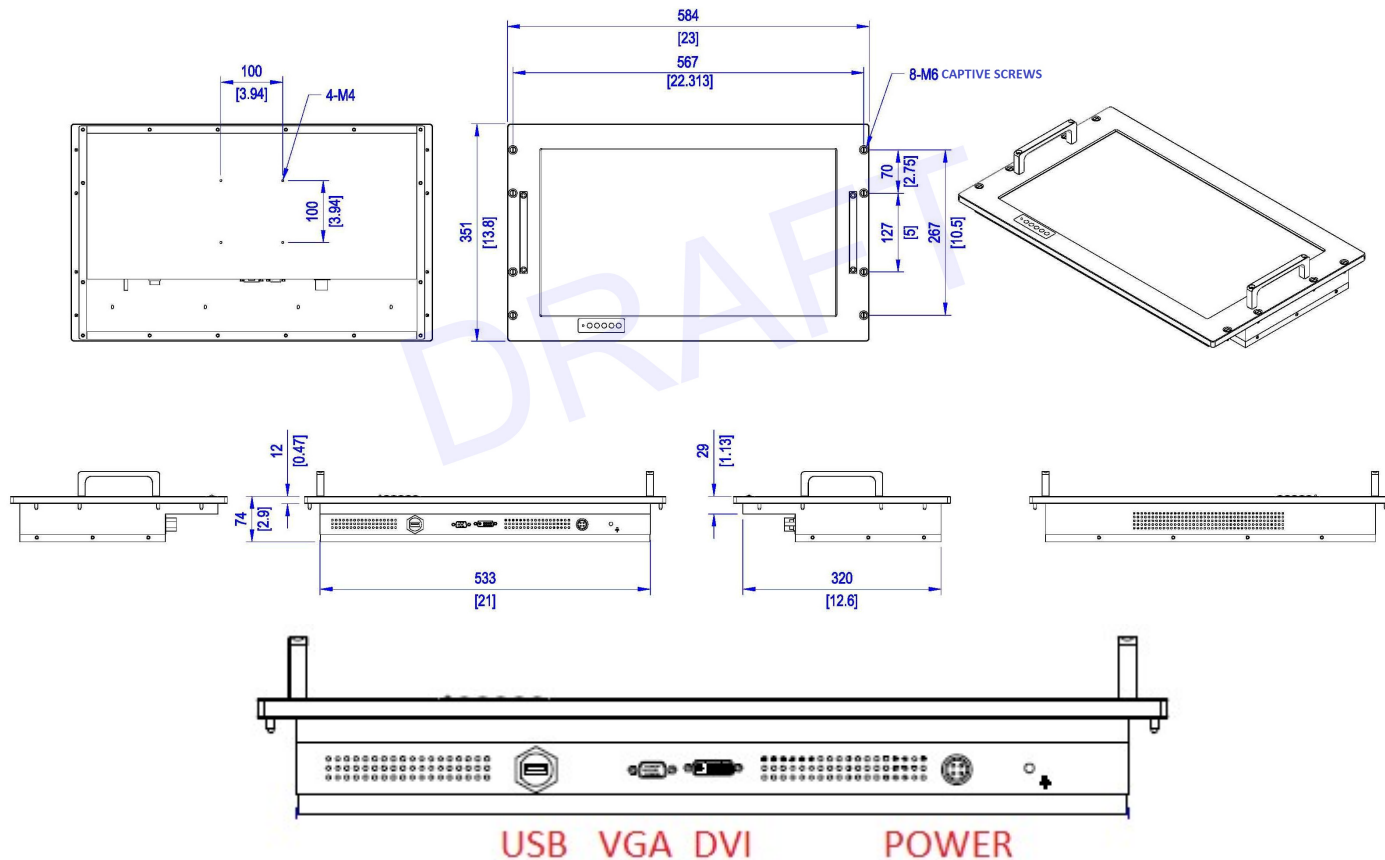

IO Ports : 1 x USB for Touch, 1 x VGA, 1 x DVI and 1 x Power Input for Display