


RUGGED TOUCH DISPLAY

IP66 Rugged 8.4" Touch Display
 1024x768, 1000 cd/m2 Operating -40 to +70°C
 with 5-Wire Resistive Touch and Front OSD Brightness

Model: NMM0840HBD

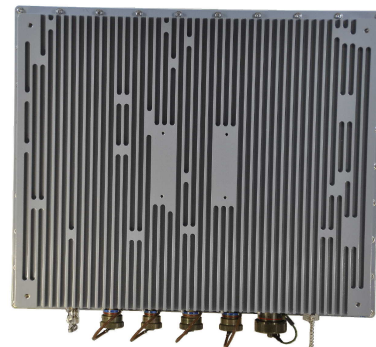

SPECIFICATIONS:

LCD Size	8.4"
Resolution	1024 x 768
Brightness	1000 cd/m2
Operating Temperature	-40 to +70°C
Storage Temperature	-50 to +80°C
Touch	5-Wire Resistive Touch
Front OSD Brightness Control	
I/O Port	
VGA	1 x VGA with military D-38999 connector
USB	1 x USB with military D-38999 connector
DC	1 x DC power with military circular connector
Power Input	DC9~36V
Military Specifications	
Operating Temperature	-40°C to 70°C Compliant
Storage Temperature	-50°C to 80°C Compliant
Humidity	0-100% Compliant
Altitude 45,000 ft.	Compliant
MIL-STD-461	EMI Design to meet
MIL-STD-810	Method 501.4 II-Op; High Temperature Compliant
MIL-STD-810	Method 502.4 II-Op; Low Temperature Compliant
MIL-STD-810	Method 514.5; Procedure I, General Vibration Compliant
MIL-STD-810	Method 516.5; Procedure I, Functional Shock Compliant
<i>Note: All Military grade related units are NCNR. Non cancellable and Non returnable.</i>	

MECHANICAL DRAWING:

