

NXT-117/11716

1U Console terminal LCD Keyboard Drawer




LCD Drawer & Console Switch Benefits

- Designed for SUN, and all other leading brands of headless servers
- Install and configure RS-232 devices across the network
- Single or "One Man" Installation slides for easy, quick installation
- 104 key notepad keyboard with full numerical pad
- Mix PS/2, USB & SUN with Multi- Platform switch capability
- Secure Remote IP access using SSH or telnet clients

Drawer Features & Options

- 1U rackmount drawer with a 17" SAMSUNG LCD
- Multiple keyboard language selections with either touchpad or trackball
- Slide rails with fixed positions to prevent drawer movement when typing
- Optional mounting hardware for two post telco style racks

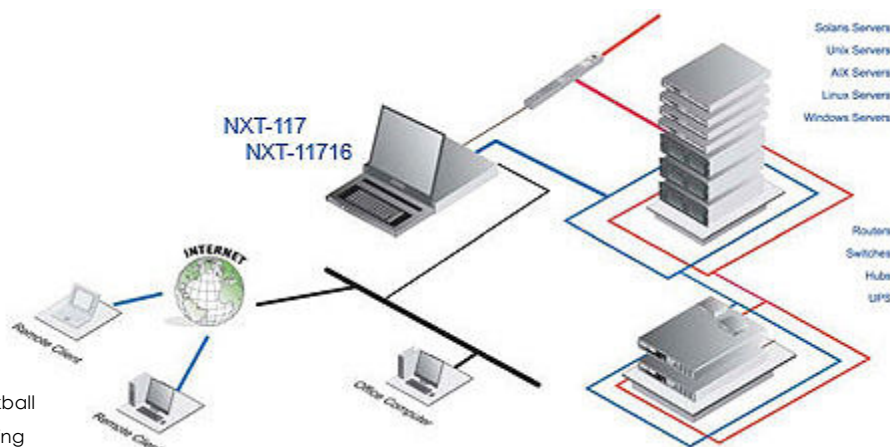


Designed for:



Keyboard

Supporting layouts

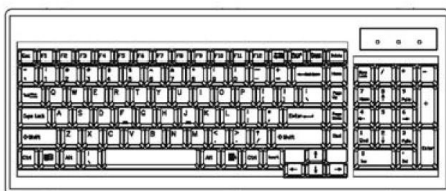



- 104 keys (US/ European/ Korean/ Chinese layout)
- 106 keys (Japan layout)

Dimensions (W x L x H)

394 x 156 x 15 (mm)
15.5 x 6.1 x 0.6 (inch)

Diagram


Unit : mm

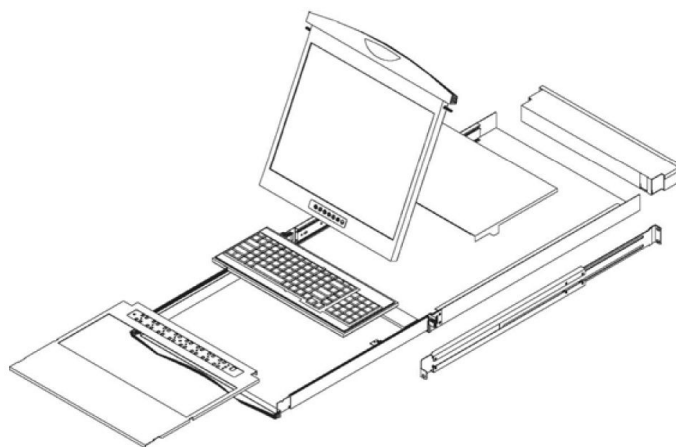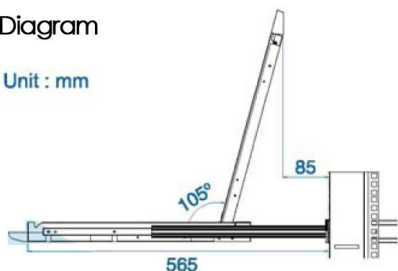

Technical Specifications:

Local Console	
LCD display:	Samsung 17" LCD, 800 x 600
Brightness :	300 cd/m2
Input device :	104-key keyboard with Num-pad
Terminal Emulations	
Emulation :	WY-60, WY-120, WY-50+, WY-325, ADDS A2, PCG Alpha-60, TV1910, TV1925, PC TERM, VT52, VT100, VT220, Console ANSI
Serial Port	
Number of ports :	1 or 16
Connectivity:	RS-232, Rx, Tx, RTS, DTR, DSR
Flow control:	None, RTS / CTS, Xon / Xoff
Remote Access (only for 16 port model)	
Security:	SSH v2, IP filtering, HTTPS /SSL, password access
Protocol:	TCP, UDP, IP, ARP, ICMP, HTTP/HTTPS, Telnet, DHCP/BOOTP, PPP, SMTP, DNS, NTP, Dynamic DNS
Compatibility	SUN Solaris, IBM RS/6000 AIX, SCO Unix, Xenix, PC-based headless server, router, terminal server, firewall & switch
Ethernet Port	IOBaseT, RM5 10/1 OOBBaseT, RJ45 (only for 16 port model)
Power	
Input:	100 or 240VAC, 50 to 60 I EC type cord
Option DC :	12V/24V/48V DC input
Consumption :	Max. 40 Watt
Regulatory Approval	FCC, CE
Environmental	
Operating :	0 to 50°C
Storage:	-10to0°C
Relative humidity:	90%, non-condensing
Shock:	50G peak acceleration (11 ms, half-sine wave)
Vibration:	58~100Hz / 0.98G (11 min / cycle)

NXT-117 - 1U console terminal LCD keyboard drawer

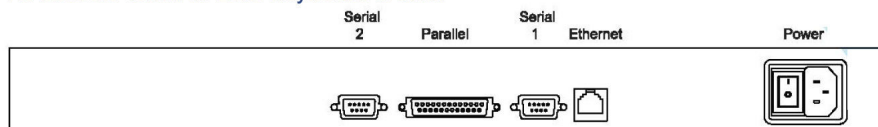

NXT-11716 -16 port SSH secure console switch integrated into terminal LCD keyboard drawer

