

Model: HNVP117/119
(1U 17", 19" High Brightness LCD Console Drawer)

HNVP117/119



Drawer Features & Display Benefits

- 1000cd/m² for 17", 19" LCD
- Lower power consumption
- High shock & vibration resistance
- Minimum EMI emissions
- Short depth design of 480mm and 520mm respectively
- New enhanced aesthetics with molded front handle
- Front USB port for device access (USB Hub KVM only)
- 2 post rack mounting available

Options

- S-Video + Composite (BNC) or Audio input
- HDMI or DVI-D (either one)
- 48V or 24VDC power

Specifications:

















LCD Panel		
Diagonal size	17" TFT	19" TFT
Max. Resolution	1280 x 1024	1280 x 1024
Brightness (cd/m ²)	1000	1000
Backlight	LED	LED
Colors	16.7M	16.7M
Contrast Ratio (typ)	1000 : 1	1000 : 1
Viewing Angle (H/V)	170° x 160°	160° x 160
Active area (mm)	338 x 270	376 x 301
MTBF (hrs)	50,000	50,000
Signal input	VGA	VGA
Casing Color	Black (RAL 9005)	
Weight (Single console)		
Net	12.5 kgs (27.5 lbs)	13.2 kgs (29 lbs)
Gross	17.5 kgs (38.5 lbs)	18.2 kgs (40 lbs)
Environmental		
Operating	0 to 50°C Degree	
Storage	-5 to 60°C Degree	
Relative humidity	5-90%, non-condensing	

Shock	10G acceleration (11 ms duration)
Vibration	5~500Hz 1G RMS random vibration
Regulatory	
Safety	FCC & CE certified
Environmental	RoHS2 & REACH compliant
Power	
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption	Max. 84 Watt, Standby 5 Watt
Product Dimensions (Single console)	
HNVP117	441.6 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch
HNVP119	441.6 x 520 x 44 mm / 17.4 x 20.5 x 1.73 inch
Packing Dimensions (Single console)	
HNVP117 / HNVP119	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch



Console Cable

NE-6
6 feet Combo KVM cable (bundle)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port


Supporting layouts

America					
	United States				
EMEA					
	United Kingdom	Germany	France	Spain	Norway
					
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia					
	China	Japan	Korea	Arabia	Turkey

Ge G keyboard integrated with touchpad

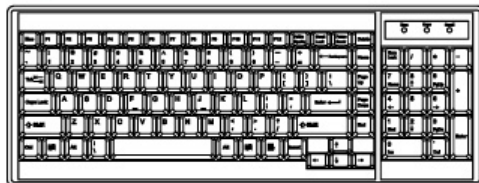

Gb G keyboard integrated with trackball

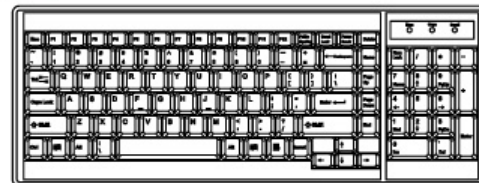

Product Dimensions (with KVM)		
HNVP117	441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch	
HNVP119	441.6 x 620 x 44 mm / 17.4 x 24.4 x 1.73 inch	
Packing Dimensions (with KVM)		
HNVP117	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch	
HNVP119	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch	
Weight (Net / Gross)		
HNVP117	13.8 kgs (30.4 lbs)	19.7 kgs (43.3 lbs)
HNVP119	14.5 kgs (31.9 lbs)	20.4 kgs (44.9 lbs)
Casing Color	Black (RAL 9005)	

KVM Selection

(X) Stands for 17" or 19" LCD size

Combo CAT6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	HNVP11X - CIP8	HNVP11X - CIP16	HNVP11X - CIP32
	1	1	0	HNVP11X - CCE8	HNVP11X - CCE16	HNVP11X - CCE32
	1	0	0	HNVP11X - C8	HNVP11X - C16	HNVP11X - C32


Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	NVIP11X - 82	NVIP11X - 162	-
	1	1	0	HNVP11X - CE8	HNVP11X - CE16	-
	1	0	0	HNVP11X - S801	HNVP11X - S1601	-

DVI-D KVM	Local	Remote	IP	12-port
	1	0	0	HNVP11X - D12


USB Hub DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	HNVIP11X - 82H	HNVIP11X - 162H	-
	1	1	0	HNVP11X - CE8H	HNVP11X - CE16H	-
	1	0	0	HNVP11X - 801H	HNVP11X - 1601H	-

Diagram (mm):


Top View

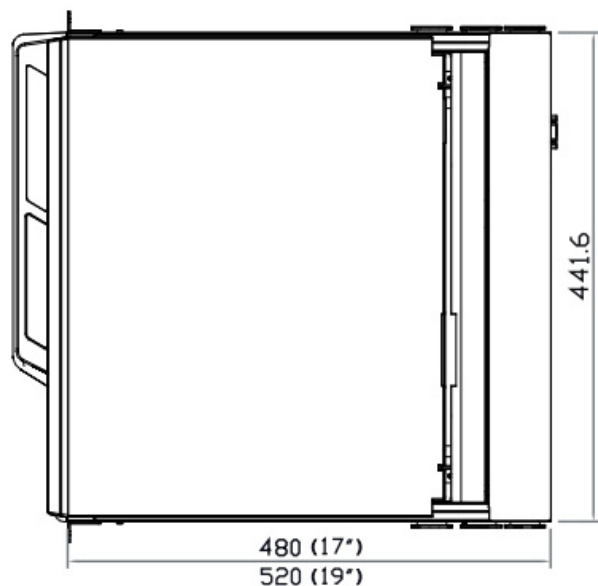

Front View

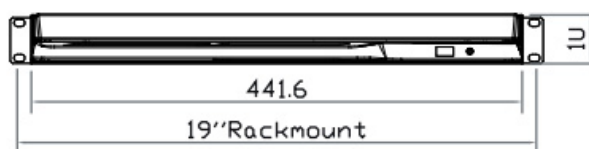

Side View



UNIT : mm
1mm = 0.03937 inch