

Standalone KVM Switch

Model: MC1116/1132



MC2116/2132

Matrix Cat6 IP KVM Benefits

- Secure IP remote user access across the world wide web
- Efficient system management with simultaneous multi-user access
- Capable of connecting 32 or 16 servers per device in 1U
- Support DVI-USB, VGA-USB & VGA-PS/2 server interface
- Up to 40 meters between your server & KVM switch
- Enhanced Cat6 cable management with remote access up to 150m

Switch Features & Options

- Provide a diversity of console to access servers independently and simultaneously
- Use of the RJ45 Cat6 interface allows for a higher number of ports in smaller density
- Greater distances between your switch and servers allow enhanced data center rack layouts
- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations

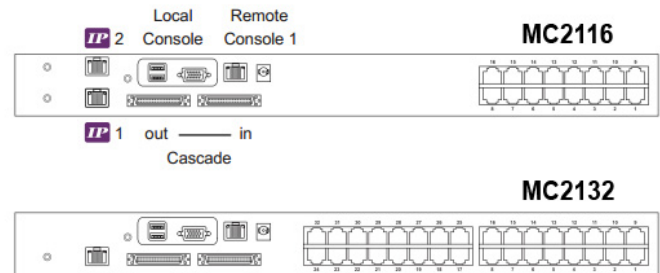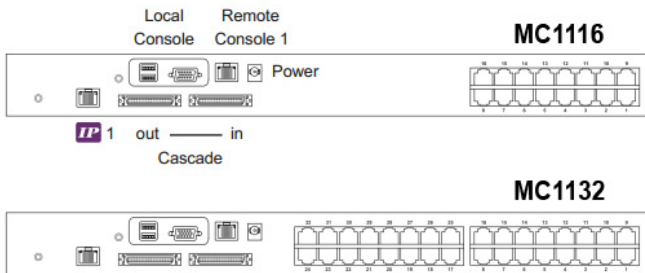


Ordering Information

Console	Local	Remote	IP	16-port	32-port
	1	1	1	MC1116	MC1132
	1	1	2	MC2116	MC2132

KVM Specification

■ KVM Port Number of ports: 16 or 32 Connector: RJ-45 Connectivity: DVI-D / VGA connector dongle up to 40 meters (132 feet) via Cat6 / Cat5 cable		■ Expansion: Up to 256 servers by 8-level cascade
■ Local Console Monitor port: DB15-pin VGA Keyboard & mouse port: 2 x USB type connector for keyboard & mouse Resolution support: 4:3 - max. 1600x1200 16:10 - max. 1440x900		■ Compatibility Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix
■ Cat6 Remote Console Number of remote port: 1 Monitor port: DB15-pin VGA Keyboard & mouse port: 2 x USB type connector for keyboard & mouse Remote I/O: RJ45 via Cat5 / Cat5e / Cat6 cable up to 500 feet Resolution support: 4:3 -max. 1600x1200 16:10-max. 1440x900		■ Power Input: AC power adapter Consumption: Max. 48 Watt, Standby 5 Watt
■ IP Remote Console Number of IP console: 1 for MC1116 / MC1132 2 for MC2116 / MC2132 User management: 15-user login, 1 x active user Browser: Internet Explorer, Firefox, Safari Security: SSL v3, RSA, AES, HTTP / HTTPS, CSR IP Access: RJ45 Ethernet per IP console Resolution support: 4:3-max. 1600x1200		■ Regulatory : Safety: cUL, FCC & CE certified Environment: RoHS2 & REACH compliant
		■ Environmental Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine Vibration: 58-100Hz / 0.98G (11ms / cycle)
		■ Product Information Dimension (W x D x H): 443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch Net weight: 3 kg / 6.5 lb
		■ Packing Information Dimension (W x D x H): 500 x400 x90 mm / 19.7 x 15.7x3.5 inch Gross weight: 5 kg / 11 lb

KVM port & Cat6 dongle connection

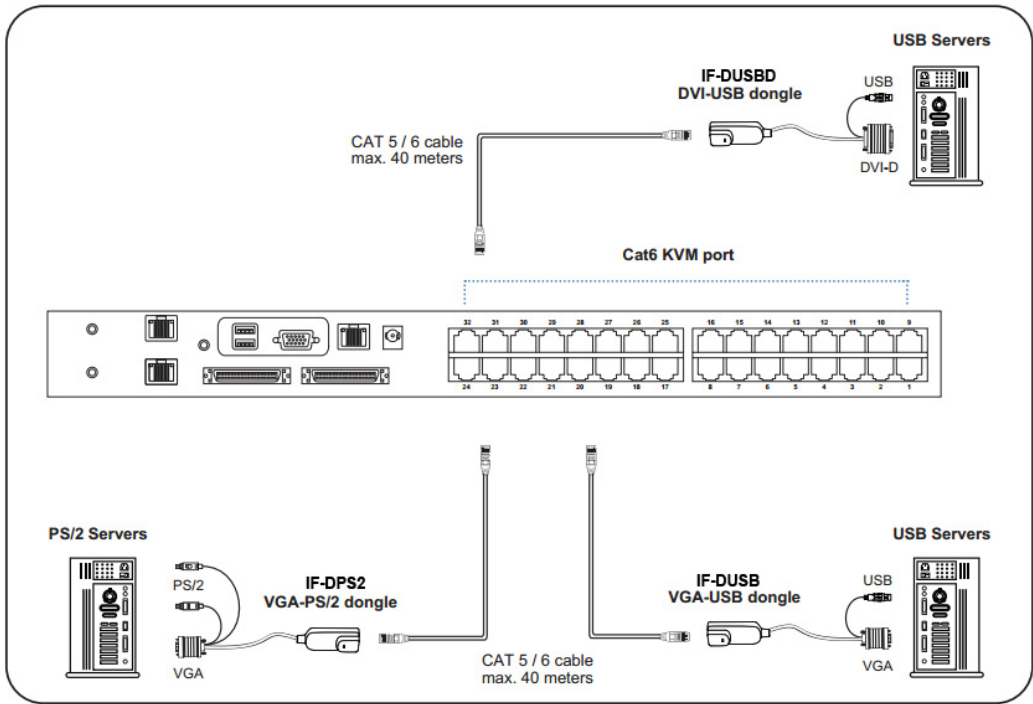

IF-DUSBD DVI-USB dongle

- To connect DVI-D connector to the computer's video card
- To connect USB connector to the computer's USB port



IF-DUSB VGA-USB dongle

- To connect DB-15 connector to the computer's video card
- To connect USB connector to the computer's USB port




IF-DPS2 VGA-PS/2 dongle

- To connect DB-15 connector to the computer's video card
- To connect PS/2 keyboard connector to the computer's keyboard port
- To connect PS/2 mouse connector to the computer's mouse port

Cat6 Dongle	EDID Resolution Hard-coded	Resolutions Capable			
		4:3			16:10
		1024 x 768	1280 x 1024	1600 x 1200	1440 x 900
IF-DPS2	1600 x 1200	✓	✓	✓	✓*
IF-DUSB	1600 x 1200	✓	✓	✓	✓*
IF-DUSBD	1280 x 1024	✓	✓	✗	✗

* Requires the user to enable showing unsupported resolutions via the target computer's video adapter settings (effectively ignoring the DDC / EDID)


IP, Remote & Local console connection

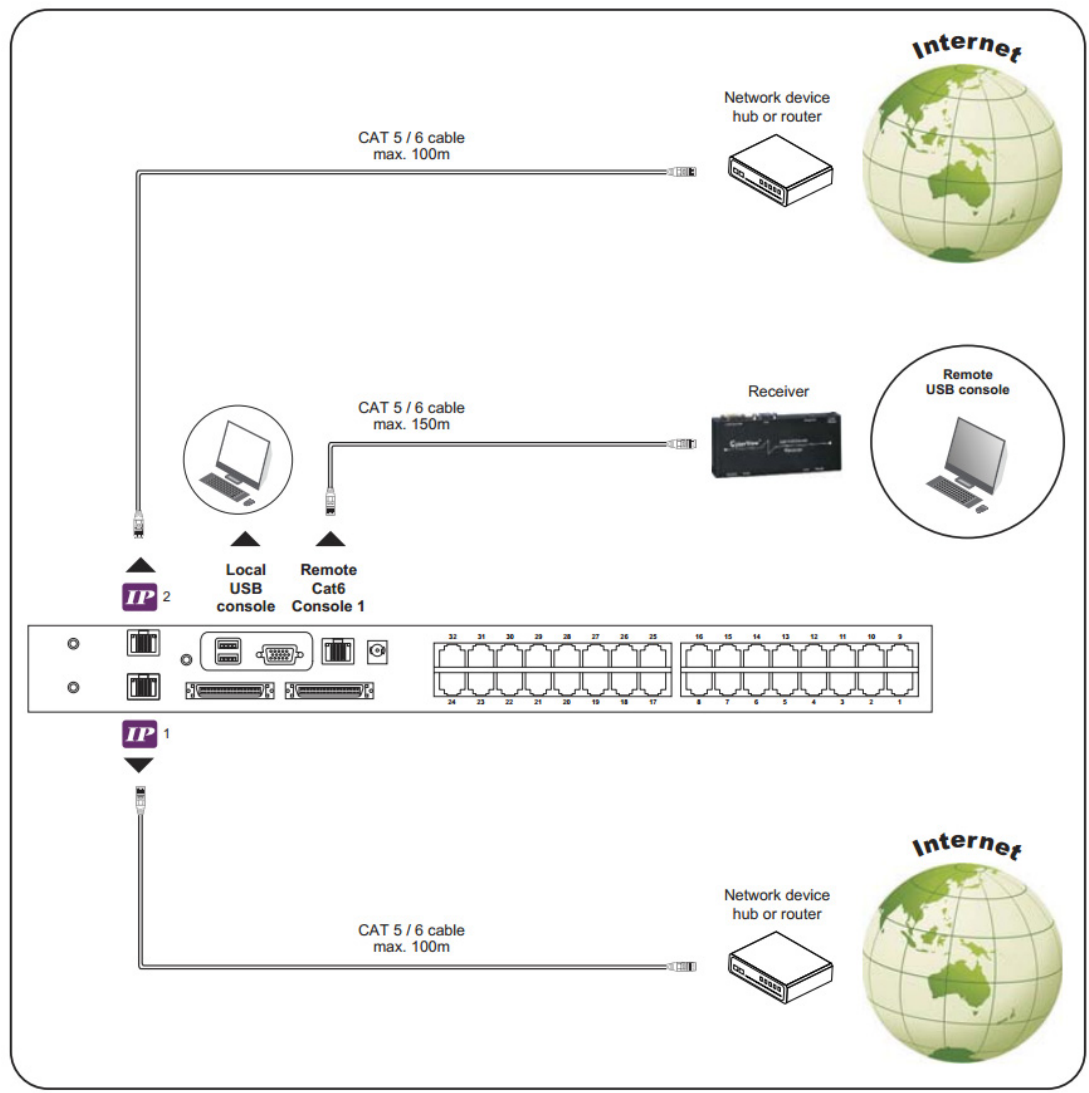

KVM Cascade

- Cascade up to 8 levels, 256 servers
- Cascading multiple KVM with CMC-8 cascade cable

Master KVM

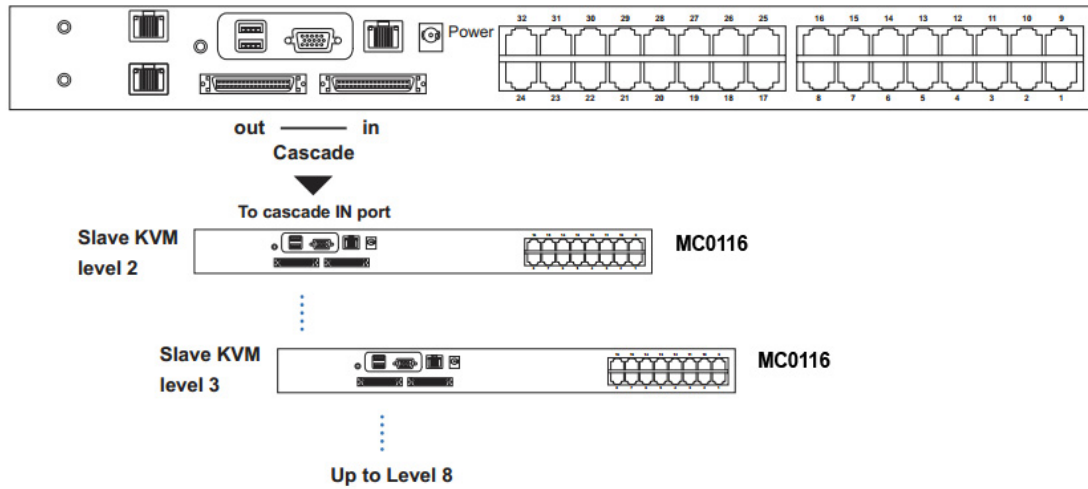

Cascaded KVMs from level 2 to 8 must be the models of MC0116 / MC0132 or M018 / M0116.



When multiple matrix KVMs cascade together, the master KVM at level 1 will take all control of other slave KVM switches (e.g. level 2 to 8).



The slave matrix KVM will be as a port expansion module of the master matrix KVM, the original remote console on slave KVM will be sacrificed and disabled.



CMC-8

- 8ft Matrix KVM cascade cable