



Model: NVCE800 / 1600


Combo DB-15 KVM Two Console KVM Benefits

- Combo DB-15 KVM with either 8 or 16 ports in 1U
- Remote access up to 150 meters
- Cascade switches up to 8 levels & Mix switches between Cat6 & Combo DB-15 KVM
- Support resolution up to 1920 x 1080
- SUN 1152 x 900 resolution compatible
- Mix PS/2, USB & SUN with Multi-Platform switch capability
- Cost efficient remote server management between user & equipment rooms within the building

Switch Features & Options

- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations

 12V, 24V and 48V DC Power option

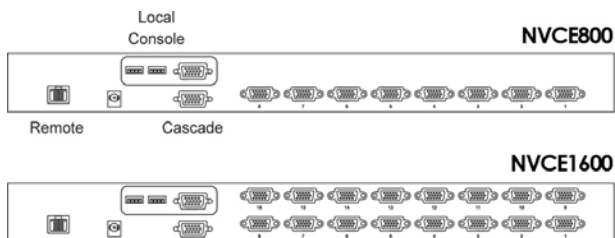

Technical Specification

■ KVM Port

Number of ports: 8 or 16
 Connector: DB-15 combo connector
 Connectivity: Combo 4-in-1 KVM cable, up to 6, 10 & 15 feet

■ Local Console

Graphic Connector: 1 x DB-15 VGA
 Resolution: Up to 1920 x 1080 / 1920 x 1200
 Input device: 2 x USB type A for keyboard & mouse

■ Remote Console

Connector: 1 x DB 15-pin, VGA
 Resolution: Up to 1600 x 1200
 Input device: 2 x USB type A for keyboard & mouse
 Remote I/O: RJ45 via Cat5 / Cat5e / Cat6 cable up to 150m
 Compensation: Auto adjust for cable length

■ Expansion:

Up to 128 servers by 8-level cascade

■ Compatibility

Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac
 Support: Windows 7 / Vista / 2003 / XP, Linux, Unix

■ Power

Input: 100 or 240V AC at 50 or 60 Hz via I EC type cord
 Option DC: 12V / 24V / 48V DC input
 Consumption: Max. 24 Watt, Standby 5 Watt

■ Regulatory :

Safety: cUL, FCC & CE certified
 Environment: RoHS2 & REACH compliant

■ Environmental

Operating: 0 to 50°C
 Storage: -5 to 60°C
 Relative humidity: 90%, non-condensing
 Shock: 50G peak acceleration (11ms, half-sine wave)
 Vibration: 58-100Hz / 0.98G (11ms / cycle)


■ Product Information

Dimension (WxDxH): 443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch
 Net weight: 2.3kg / 5.1 lb (CV-802)
 2.5 kg / 5.5 lb (CV-1602)

■ Packing Information

Dimension (WxDxH): 500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch
 Gross weight: 3.8 kg / 8.4 lb (NVCE800)
 4.1 kg / 9 lb (NVCE1600)


KVM port connection

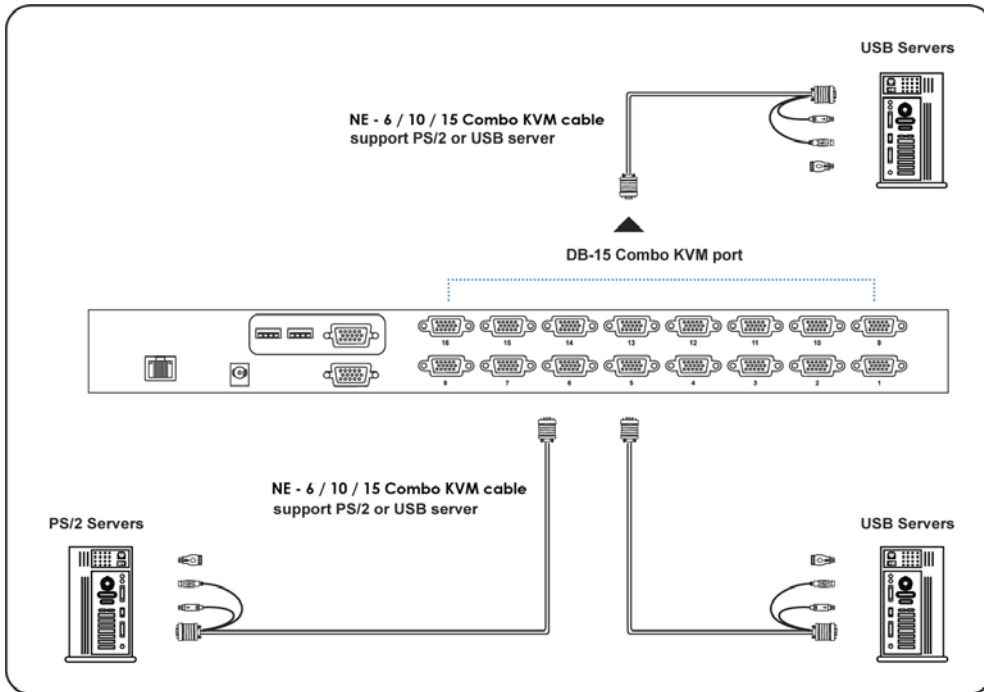

NE-6 / NE-10 / NE-15

- 6 / 10 / 15 ft Combo KVM cable
- Support PS/2 or USB server

Remote & Local console connection

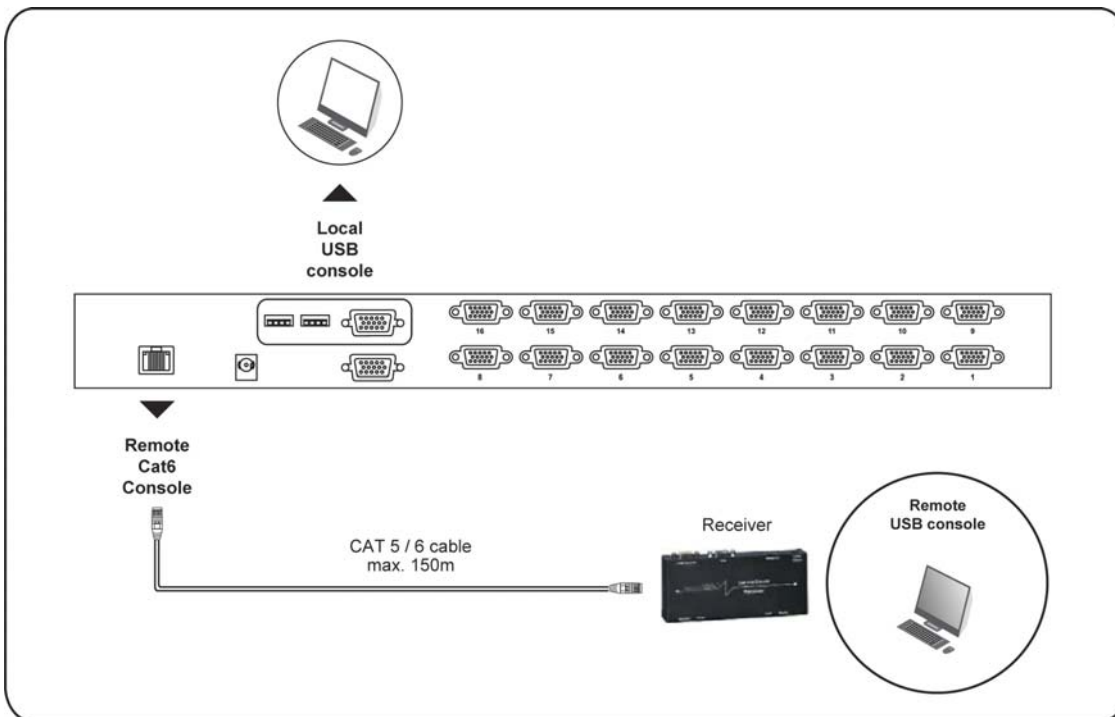

KVM port connection

- Cascade upto 8 levels, 128 servers
- Cascading multiple KVM with CBC-6 cascade cable

