

1U Rackmount 12-port DVI-D, USB, Audio KVM Switches with OSD Support 1920 x 1200 12pcs of NC-6 6ft long KVM cable (server end - DVI-D + USB + audio; KVM port - DVI-D + USB)

Model: NVD1201



FC CE

## DVI-D KVM Benefits

- 12-port DVI-D, USB & Audio KVM
- DVI-D single link support 1920 x 1200 transmission
- Support widescreen & native SUN 1152 x 900 resolution
- Multi-platform for PCs, SUN and Mac G3 / G4 Mac / iMac
- Hot pluggable, no software or drivers required

## Switch Features & Options

- Support VESA DDC2B emulation & TMDS signal pass-through
- Port switching via push button & keyboard hotkeys



12V, 24V and 48V DC Power option

## Ordering Information




Console	Local	Remote	IP	12-port
	1	0	0	<b>NVD1201</b>

## Technical Specification

- **KVM Port :**
  - Number of ports: 12
  - Connector: DVI-D connector  
USB 3.0 connector ( combined for keyboard, mouse & audio )
  - Connectivity: Combo 4-in-1 KVM cable, 6 or 15 feet
- **Local Console**
  - Graphic Connector: 1 x DVI-D
  - Resolution: Up to 1920 x 1200
  - Input device: 2 x USB type A for keyboard & mouse
  - Audio out: 1 x 3.5mm stereo audio
- **Management**
  - PC Selection: Front button & hotkey
- **Expansion :** Up to 128 servers by 8-level cascade
- **Compatibility :**
  - Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac
  - Support: Windows 7 / Vista / 2003 / XP, Linux, Unix
- **Power :**
  - Input: 100 or 240V AC at 50 or 60 Hz via IEC type cord
  - Option DC: 12V / 24V / 48V DC input
  - Consumption: Max. 12 Watt, Standby 5 Watt
- **Regulatory Approval:** FCC, CE
- **Environmental**
  - Operating: 0 to 50°C
  - Storage: -5 to 60°C
  - Relative humidity: 90%, non-condensing
  - Shock: 50G peak acceleration (11ms, half-sine wave)
  - Vibration: 58~100Hz / 0.98G (11ms / cycle)
- **Product Information**
  - Dimension (W x D x H): 443 x 171 x 43.6 mm / 17.4 x 6.7 x 1.72 inch
  - Net weight: 3 kg / 6.5 lb
- **Packing Information**
  - Dimension (W x D x H): 500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch
  - Gross weight: 5 kg / 11 lb

## KVM port connection

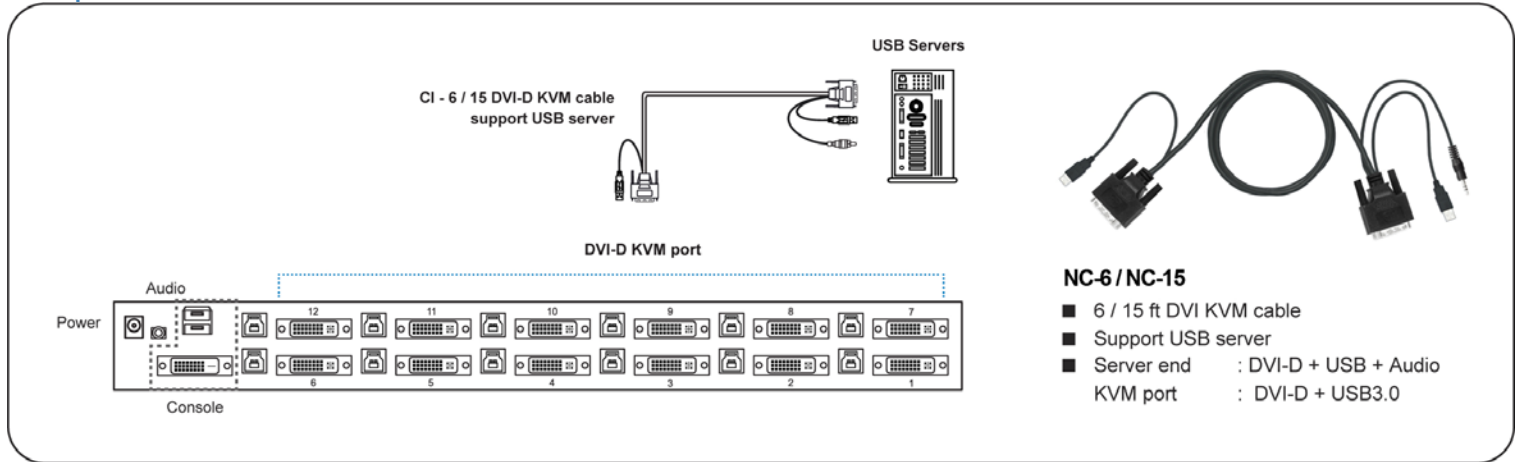

## Front Panel - Port LED Indications

