

1U Rackmount LCD 19" 1280x1024 LCD 08-Ports USB RGB KVM Switch and 2 x USB 2.0 Port Sharing USB Peripheral for Computers with 104 key Notepad keyboard w/ Touchpad (Ne) with NB-6 (6 ft long) x 8pcs 24.5" Deep + 125V DC Terminal + and - Block Connectors



MODEL: NVP119-B8e

BENEFITS:

- 1U 19" LCD console drawer
- Native resolution of 1280 x 1024 and supports 16.7 million colors
- Features a 104-key keyboard with a touchpad
- Compact design with short depths of 460mm and 500mm
- Designed for easy one-person installation
- Enhanced aesthetics with a molded front handle
- Comes with a 2-year standard warranty, which can be upgraded to 5 years.

OPTIONS:

- HDMI 1.4 + DVI-D + Audio in & out + Speakers (AV4.4)
- HDMI 1.4 + Speakers (HDMI)
- S-Video + Composite + Speakers (BNC)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (SDI)
- Front USB hub port for device access (USB)
- 2-post rack mounting brackets (ORB-2.1)
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard option
- 19" Touchscreen : Resistive 1-pt

SPECIFICATIONS

LCD Panel	
Panel size (diagonal)	19"
Native resolution	1280 x 1024
Brightness (cd/m ²)	250
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	85/85/80/80
Response time (ms)	5
Dot pitch (mm)	0.264
Display area (mm)	376.32H x 270.33V
Surface treatment	Haze 25%, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Physical		
Product (WxDxH)	Console w/ KVM	442 x 620 x 44 mm 17.4 x 24.4 x 1.73 inch
Packing (WxDxH)	Console w/ KVM	590 x 815 x 140 mm 23.2 x 32.1 x 5.5 inch
Net weight	Console w/ KVM	13.7 kg / 30.1 lb
Gross weight	Console w/ KVM	19.7 kg / 43.3 lb

Mounting Distance	
Console w/ KVM drawer	510 ~ 840 mm 20.1 ~ 33.1 inch



Environment	
Operating temp.	-20 to 65°C degree
Storage temp.	-20 to 65°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC, CE & CCC
Safety	CE / LVD, UKCA & CCC
Environment	RoHS3 & REACH / WEEE


**Specifications subject to change without notice, not responsible for typographical errors.*

STANDARD KEYBOARD

Ge G keyboard with touchpad

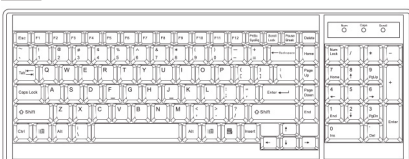

Gb G keyboard with trackball

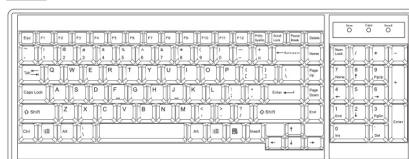

KEYBOARD OPTIONS

***US Layout only**

Se S keyboard with touchpad

Sb S keyboard with trackball



Supporting layouts


America 
U.S.

EMEA      
U.K. Germany France Russia Spain Italy


Asia  
Japan Korea

KVM Rear Kit

back



! The power of the KVM rear kit may be changed to external power design based on the LCD console drawer series and model.

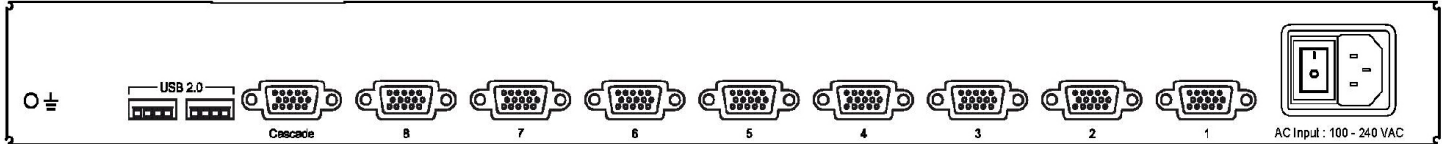


2 x USB 2.0
(USB hub for device connection)

Power

KVM SPECIFICATIONS


KVM Port		
Number of ports :	8	
Connector :	DB-15 combo connector	
Connectivity :	Combo 2-in-1 VGA + USB KVM cable, 6, 10 or 15 feet	
Local Console :	Nil for LCD console drawer version	
USB Hub :	2 x USB type A for sharing other peripheral devices among the computers	
Management		
Multilingual OSD :	English, France, German, Spanish, Italian, Russian, Simplified Chinese, Japanese	
Hotkey combination :	Scroll-lock, Cap-lock, Num-lock, Alt, Ctrl & Win	
Security :	Password enable & disable, up to 8 users profile for port access	
PC Selection :	Front button, OSD menu & hotkey	
Compatibility		
Hardware :	HP / IBM / Dell PC, Server and Blade Server SUN / Mac	
OS Support :	Windows / Linux / Unix / Mac OS	
Power		
Input :	Auto sensing 100 to 240VAC, 50 / 60 Hz	
Option DC :	12V / 24V / 48V / 125V DC input	
Consumption :	Max. 10W	
Compliance		
EMC :	FCC & CE	
Safety :	CE / LVD & UKCA	
Environment :	RoHS3 & REACH / WEEE	
Environmental		
	Operating	Storage / Non-operating
Temperature :	0 to 55°C degree	-20 to 60°C degree
Humidity :	10~90%, non-condensing	5~90%, non-condensing
Altitude :	16,000 ft	40,000 ft
Shock :	-	10G acceleration (11ms duration)
Vibration :	-	10~300Hz 0.5G RMS random vibration

KVM PORT CONNECTION

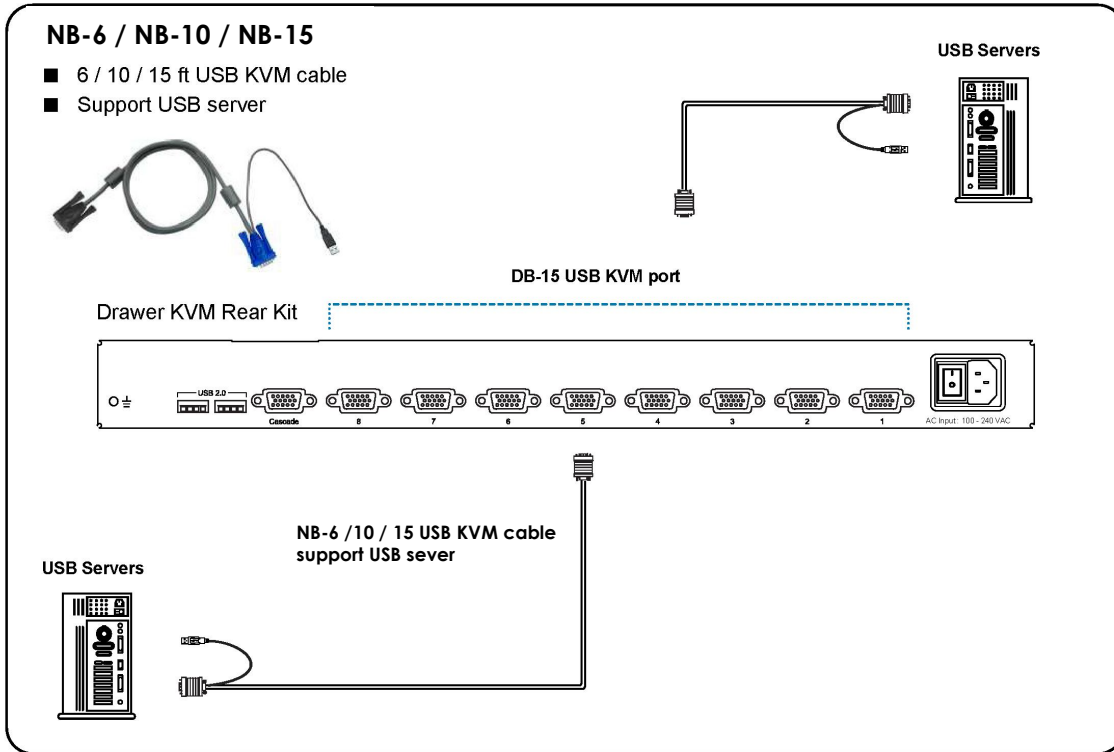

MECHANICAL DRAWINGS

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

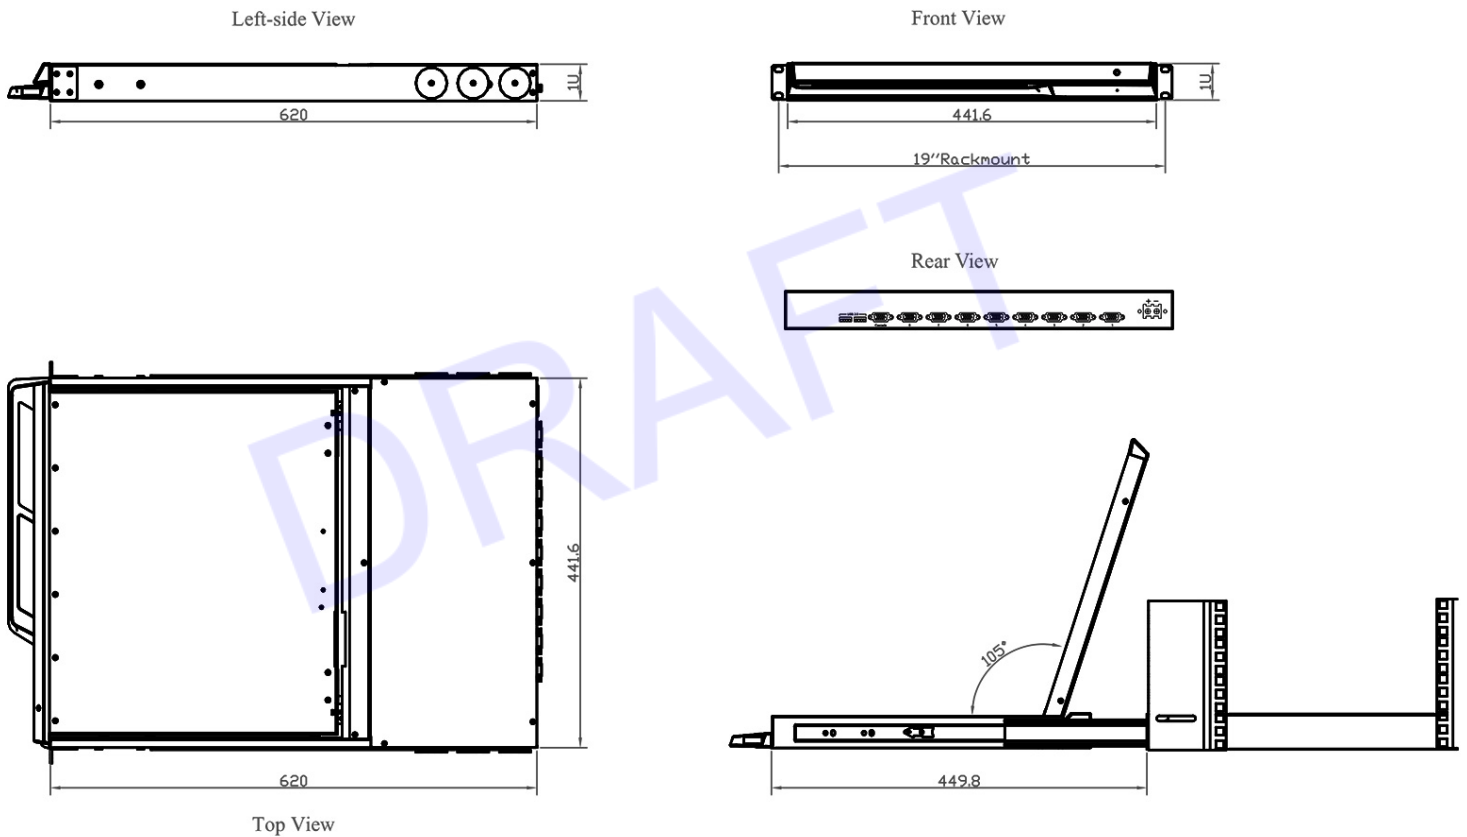

Drawing No.: NVP119-B8e-11102023-V1