

1U Rackmount 19" TFT LCD Monitor w/notebook keyboard & touch-pad mouse Drawer 1280x1024, resolution, VGA + DVI-D + HDMI + audio w/speakers. USB keyboard and Mouse

Remarks:

1. This model is in 2009-style which has 2-point lock in the front handle, and the handle is 1/2" sticking out from the front mounting bracket only.
2. CAC reader is integrated into NVP119e Front next to the keyboard.
3. Bundle with CAC reader plus 1 x USB front hub port
4. Included 1 x NB-6A



Model: NVP119-CAC-De

LCD DRAWER & KVM BENEFITS

- 1U 19" LCD console drawer
- 104-key keyboard with touchpad
- New enhanced aesthetics with molded front handle
- Front USB port for device access (USB Hub KVM only)
- 2 post rack mounting available

OPTIONS

- S-Video + Composite (BNC) or Audio input
- 48V, 24V or 12VDC power

CAC READER SPECS

- DOD Military CAC USB Smart Card Reader for CAC Cards, Government ID, National ID, ActivClient, AKO, OWA, DKO, JKO, NKO, BOL, GKO, Marinet, AF Portal, Pure Edge Viewer, ApproveIt, DCO, DTS, LPS, Disa Enterprise Email etc.
- Compatible with windows (32/64bit) XP/Vista/ 7/8/10, Mac OS X
- Support Card types: 5V, 3V and 1.8V Smart Cards, ISO 7816 Class A, B and C.
- Certifications Standards: ISO-7816 & EMV2 2000 Level 1, CE, FCC, VCCL, CCID, Microsoft WHQL ; and RECOMMENDED by militarycac.com

LCD Panel	
Diagonal size	19" TFT
Max. Resolution	1280 x 1024
Brightness (cd/m2)	250
Backlight	LED
Colors	16.7M
Contrast Ratio (typ)	1000 : 1
Viewing Angle (H/V)	85/85/80/80
Active area (mm)	376 x 301
MTBF (hrs)	30,000
Signal input	VGA + DVI + HDMI
Casing Color	Black (RAL 9005)
Weight (Single console)	
Net	12.7 kgs (27.9 lbs)
Gross	17.3 kgs (38.1 lbs)
Environmental	
Operating	20 to 65°C Degree
Storage	-20 to 65°C Degree
Operating humidity	10~90%, non-condensing
Storage humidity	5~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11 ms duration)
Vibration	10~300Hz 0.5G RMS random vibration
Compliance	
EMC	FCC, CE & CCC
Safety	CE / LVD, UKCA & CCC
Environment	REACH & RoHS3 / WEEE

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption Console with KVM	Screen On	Max. 22W / Max. 55W
	Power Saving Mode	Max. 2W / Max. 34W
	Power Button Off	Max. 1W / Nil
Product Dimensions		
NVP119-CAC-e	441.6 x 570 x 44 mm / 17.4 x 22.5 x 1.73 inch	

**Specifications subject to change without notice, not responsible for typographical errors.*

CONSOLE CABLE



NB-6A
6 feet Combo KVM cable (bundle)
- VGA+ 2xUSB KVM Combo Cable 6ft long

DIMENSIONS


Model	Product Dimension (W x D x H)	Packing Dimension (W x D x H)	Net Weight	Gross Weight
NVP119-CAC-e	441.6 x 570 x 44 mm 17.4 x 22.5 x 1.73"	590 x 823 x 140 mm 23.2 x 32.4 x 5.5"	12.7 kg 27.9 lb	17.3 kg 38.1 lb

KEYBOARD SELECTION



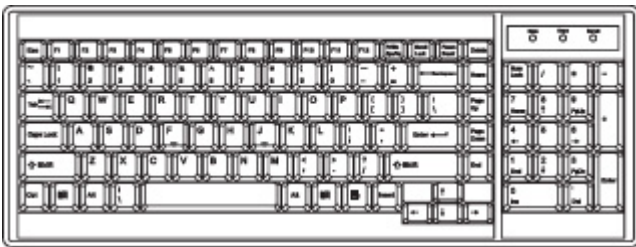



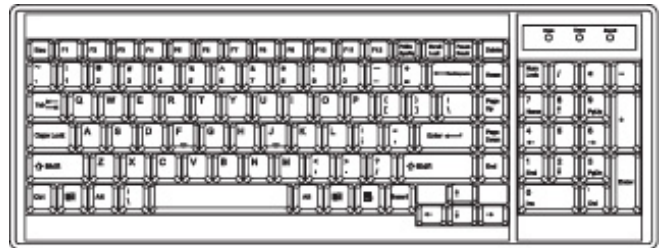


e keyboard integrated with touchpad



b keyboard integrated with trackball



Supporting layouts

America							
	U.S.						
EMEA							
	U.K.	Germany	France	Russia	Spain	Italy	
	Asia						
		Japan					
		Korea					

KEYBOARD OPTIONS *layout only

Se S keyboard with touchpad


Sb S keyboard with trackball



DIMENSION

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

Life-Side View

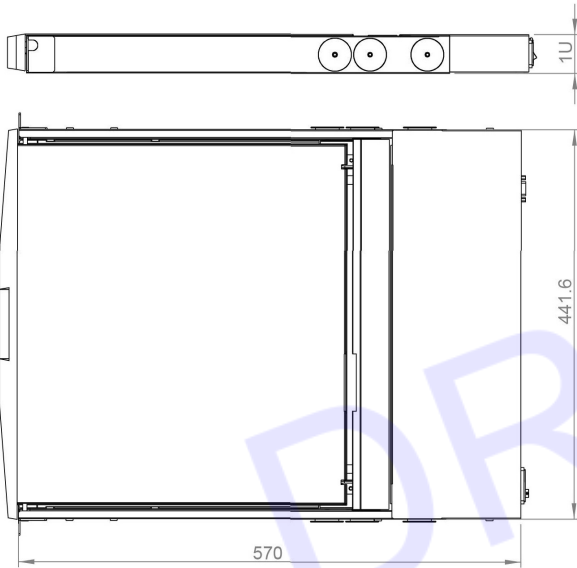


Top View


Front View



I/O Ports

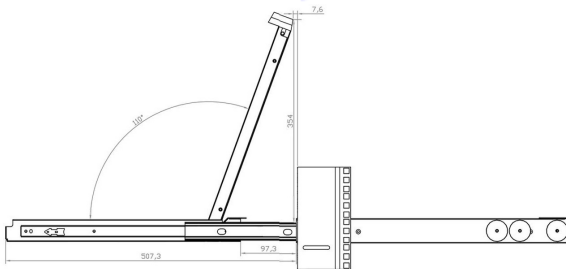

Lockable Railway

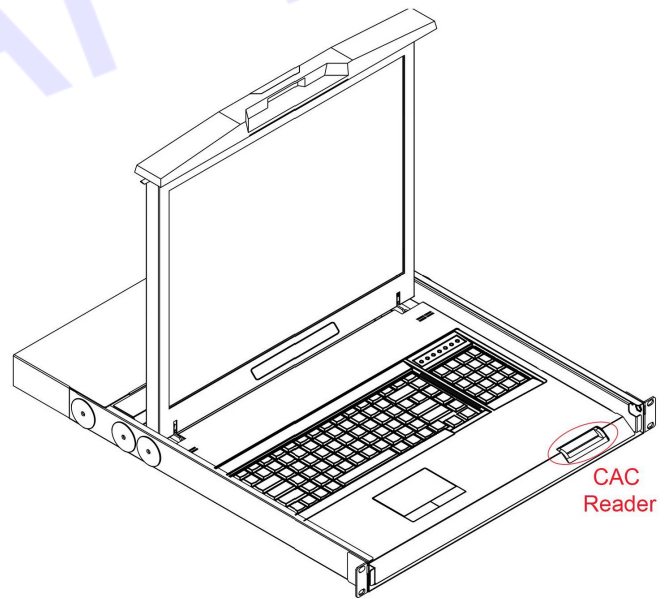

Drawing No.: NVP119-CAC-De-03142024-V1

ACTUAL PICTURES – 05/07/25



Reference: SO# 121176