

1U Rackmount 19" TFT LCD Monitor w/notebook keyboard & touch-pad mouse Drawer 1280x1024, resolution, VGA + DVI-D + HDMI + audio w/speakers. USB keyboard and Mouse

Remarks:

1. This model is in 2009-style which has 2-point lock in the tront handle, and the handle is 1/2" sticking out from the front mounting bracket only.

CAC reader is integrated into NVP119e Front next to the keyboard.

3. Bundle with CAC reader plus 1 x USB front hub port

4. Included 1 x NB-6A

Model: NVP119-CAC-De



LCD DRAWER & KVM BENEFITS

- 1U 19" LCD console drawer
- 104-key keyboard with touchpad
- Short depth design of 460mm and 500mm respectively
- New enhanced aesthetics with molded front handle
- Front USB port for device access (USB Hub KVM only)
- 2 post rack mounting available

OPTIONS

- S-Video + Composite (BNC) or Audio input
- 48V, 24V or 12VDC power

CAC READER SPECS

- DOD Military CAC USB Smart Card Reader for CAC Cards, Government ID, National ID, ActivClient, AKO, OWA, DKO, JKO, NKO, BOL, GKO, Marinenet, AF Portal, Pure Edge Viewer, Approvelt, DCO, DTS, LPS, Disa Enterprise Email etc.
- Compatible with windows (32/64bit) XP/Vista/ 7/8/10, Mac OS X
- Support Card types: 5V, 3V and 1.8V Smart Cards, ISO 7816 Class A, B and C.
- Certifications Standards: ISO-7816 & EMV2 2000 Level 1, CE, FCC, VCCI, CCID, Microsoft WHQL; and RECOMMENDED by militarycac.com

LCD Panel				
Diagonal size	19" TFT			
Max. Resolution	1280 x 1024			
Brightness (cd/m2)	250			
Backlight	LED			
Colors	16.7M			
Contrast Ratio (typ)	1000 : 1			
Viewing Angle (H/V)	160° x 160°			
Active area (mm)	376 x 301			
MTBF (hrs)	30,000			
Signal input	VGA + DVI + HDMI			
Casing Color	Black (RAL 9005)			
Weight (Single console)				
Net	12.7 kgs (27.9 lbs)			
Gross	17.3 kgs (38.1 lbs)			
Environmental				
Operating	0 to 50°C Degree			
Storage	-5 to 60°C Degree			
Relative humidity	5~90%, non-condensing			
Shock	10G acceleration (11 ms duration)			
Vibration	5~500Hz 1G RMS random vibration			
Regulatory	cUL, FCC, CE			

Modified Date: 03-14-2024

Power				
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz			
Consumption	Max. 48 Watt, Standby 5 Watt			
Product Dimensions (Single console)				
NVP119-CAC-e	441.6 x 500 x 44 mm / 17.4 x 19.7 x 1.73 inch			

^{*}Specifications subject to change without notice, not responsible for typographical errors.

CONSOLE CABLE

NE-6

6 feet Combo KVM cable (bundle)

- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port


DIMENSIONS


Model	Product Dimension (W x D x H)	Packing Dimension (WxDxH)	Net Weight	Gross Weight
NVP119-CAC-e	441.6 x 500 x 44 mm	590 x 823 x 140 mm	12.7 kg	17.3 kg
	17.4 x 19.7 x 1.73"	23.2 x 32.4 x 5.5"	27.9 lb	38.1 lb

KEYBOARD SELECTION Supporting layouts

e keyboard integrated with touchpad












EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com

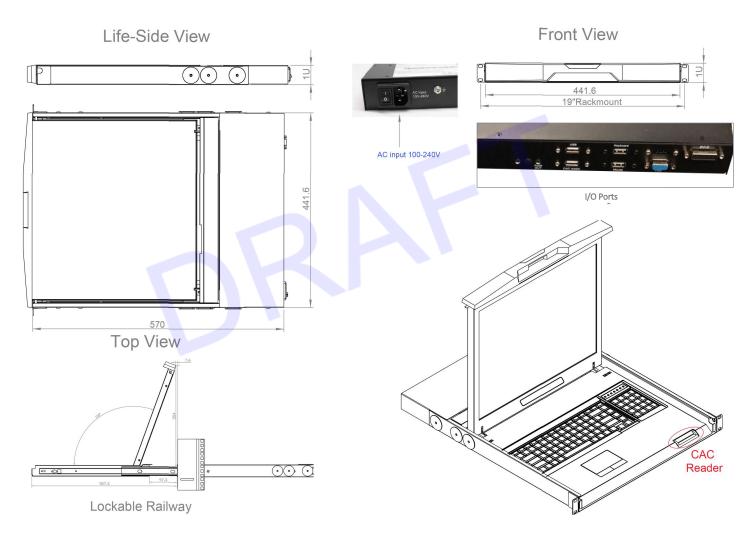

Drawing No.: NVP119-CAC-De-03142024-V1

i-Tech Company LLC EMAIL: <u>info@itechlcd.com</u> • WEB: <u>www.iTechLCD.com</u>