## 1U Rack Mount LCD Console Drawer

# **NVP** Series

NetView:1U Rackmount 24" Wide 1920 x 1200 LCD KVM with 104 key notepad keyboard w/ Trackball (b), Integrated with DVI-D + keyboard + mouse,1 KVM Ports. Over Depth is 27.5 Inch. Dongles sold separately

### Model: NVPW1240b

#### **FEATURES**:

- 1U 24" widescreen LCD console drawer
- Support 1920 x 1200 native WUXGA Ultra high resolution
- PIP & Picture by Picture viewing efficiency
- 104-key keyboard with trackball
- New enhanced aesthetics with molded front handle

#### **Drawer Features & Options**

- 3G / HD / SD-SDI Broadcast-grade input (w/ speaker)
- HDMI (w/ speaker)
- DC power : 12V / 24V / 48V / 110 ~ 125V

#### **SPECIFICATIONS:**


| LCD Panel                           |   |  |  |  |
|-------------------------------------|---|--|--|--|
| Diagonal size                       | 24.1" widescreen TFT                          |  |  |  |
| Max. Resolution                     | 1920 x 1200                                   |  |  |  |
| Brightness (cd/m2)                  | 300   |  |  |  |
| Backlight                           | LED   |  |  |  |
| Colors                              | 16.7M   |  |  |  |
| Contrast Ratio (typ)                | 1000 : 1                                      |  |  |  |
| Viewing Angle (H/V)                 | 178° x 178°                                   |  |  |  |
| Active area (mm)                    | 518 x 324                                     |  |  |  |
| MTBF (hrs)                          | 30,000  |  |  |  |
| Casing Color                        | Black ( RAL 9005 )                            |  |  |  |
| Weight ( Single console             |   |  |  |  |
| Net                                 | 15.3 kgs / 33.7 lbs                           |  |  |  |
| Gross                               | 19.5 kgs / 42.9 lbs                           |  |  |  |
| Environmental                       |   |  |  |  |
| Operating                           | 0 to 55°C Degree                              |  |  |  |
| Storage                             | -20 to 60°C Degree                            |  |  |  |
| Relative humidity                   | 5~90%, non-condensing                         |  |  |  |
| Shock                               | 10G acceleration (11 ms duration)             |  |  |  |
| Vibration                           | 5~500Hz 1G RMS random vibration               |  |  |  |
| Regulatory                          | FCC & CE certified                            |  |  |  |
| Power                               |   |  |  |  |
| Input                               | Auto-sensing 100 to 240VAC, 50 / 60Hz         |  |  |  |
| Consumption                         | Max. 40 Watt, Standby 5 Watt                  |  |  |  |
| Product Dimensions (Single console) |   |  |  |  |
| Product                             | 441.6 x 700 x 44 mm / 17.4 x 27.6 x 1.73 inch |  |  |  |
| Packing                             | 595 x 910 x 140 mm / 23.4 x 35.8 x 5.5 inch   |  |  |  |







#### STRUCTURE DIAGRAM

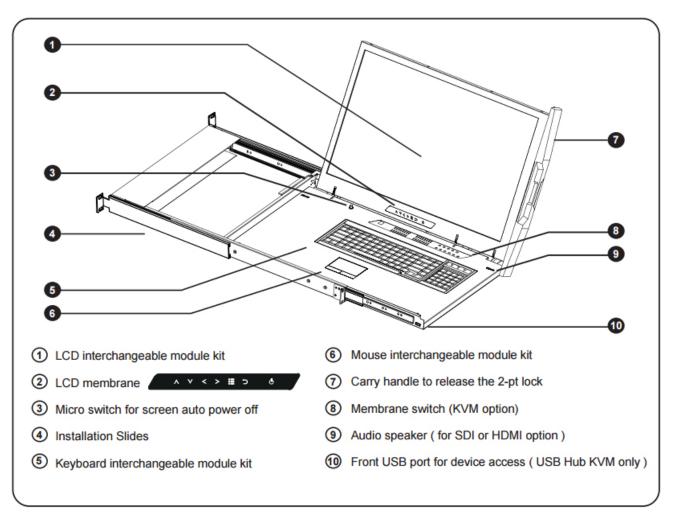

#### STANDARD KEYBOARD

e keyboard integrated with touchpad





b keyboard integrated with trackball










■ Hold the handle and slide out the drawer.



■ Flip up the LCD to a suitable angle




• Operate the LCD console drawer.

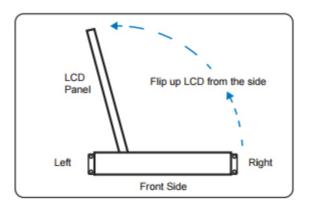

**Option - Right Side Open** 

#### DIMENSION

#### Front View



#### **Rear View**

| Power | Power |         | DVI-D |
|-------|-------|---------|-------|
|       |       | KB / MS |       |



# Side View Image: Side View <thtttttttttttttttt

#### **Top View**

