


Date : 11 Jan 18
Version : V2

1-Phase 110V 30A monitored PDU drawing & specification

Model : PD-24-30A-L530

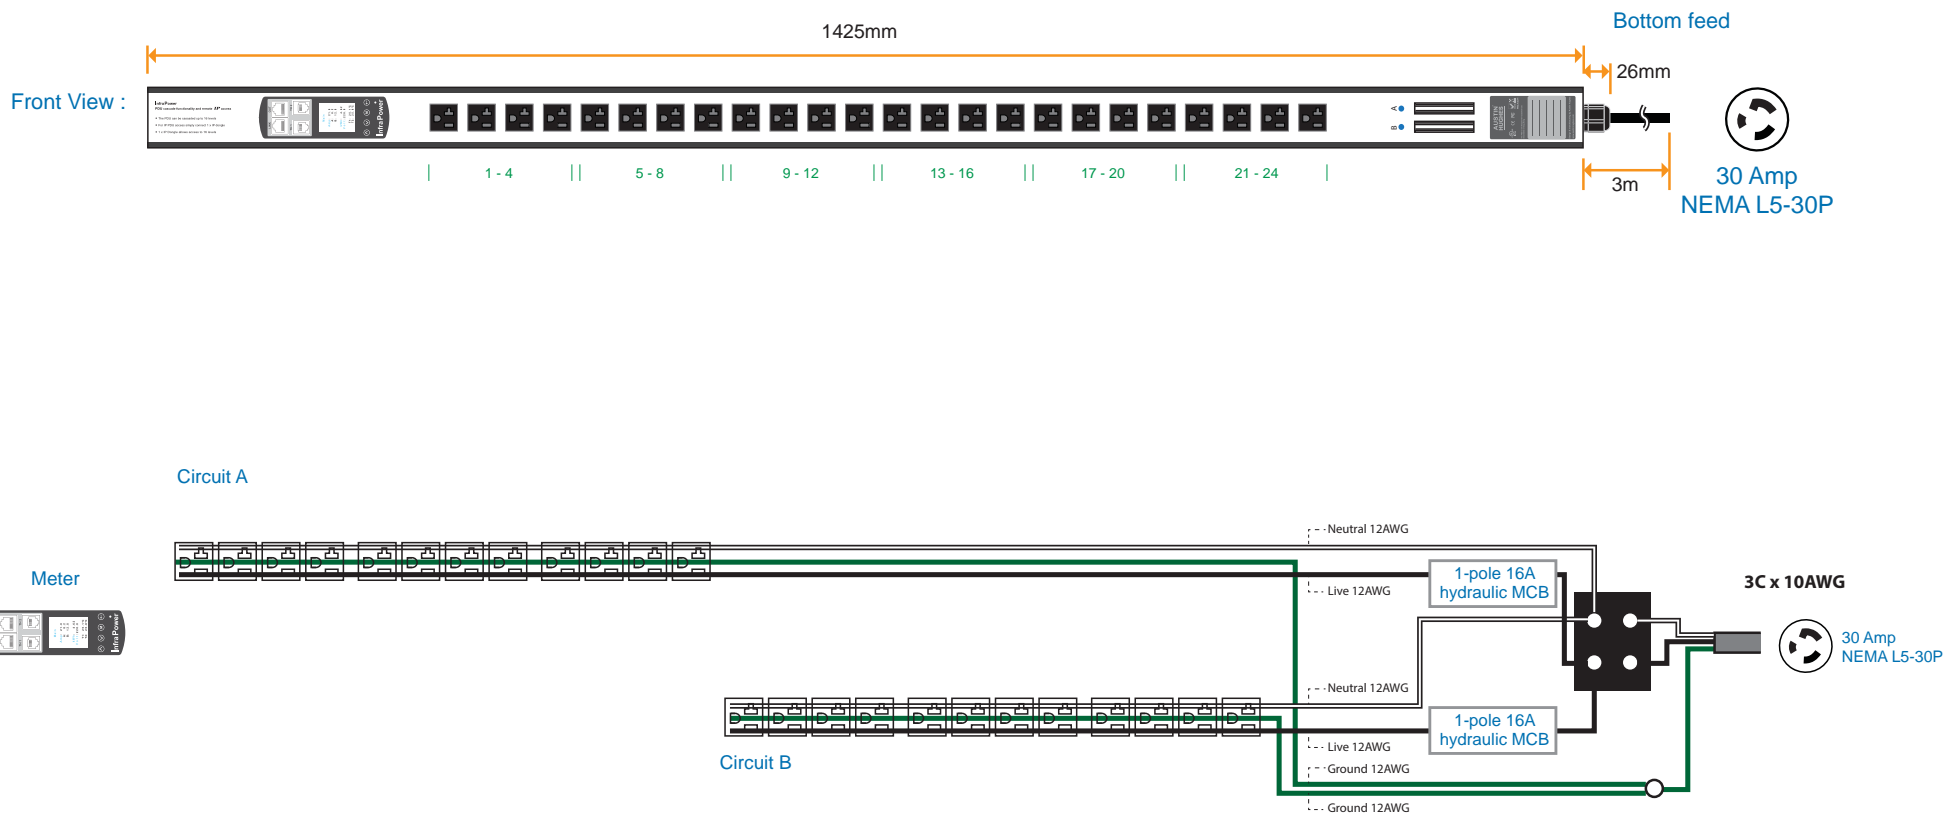

Single phase monitored PDU

Input Rating : 30A, 110V
 Outlet : 20A Rated NEMA x 24
 Inlet : 30A NEMA L5-30P plug
 Cordset : 3 meter UL 10AWG cordset
 Protection : 16A single pole hydraulic MCB x 2
 Circuit Details : < **Circuit A** > Output 12A max. U.S # 1 - 12
 < **Circuit B** > Output 12A max. U.S # 13 - 24

Meter Features (W monitored PDU)

Local Display : Field replaceable 1.8" color LCD
 Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
 Accuracy : ±1% true RMS
 IP Access : via IP dongle, one IP Access up to 16 PDU Levels
 Cascade : Up to 16 PDU under single IP address via IP dongle
 SNMP : via IP dongle
 Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance	:	FCC & CE certified
Safety Compliance	:	CE / LVD certified
Environment Compliance	:	RoHS2 & REACH
Operating Temperature	:	-5 to 60 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity	:	8 to 95% RH, non-condensing
Dimension	:	60 (W) x 60 (D) x 1425 (H) mm
Material	:	Extrusion
Color	:	Black