




Front view :

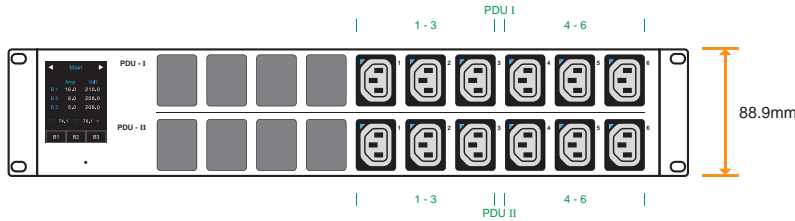

Top View :

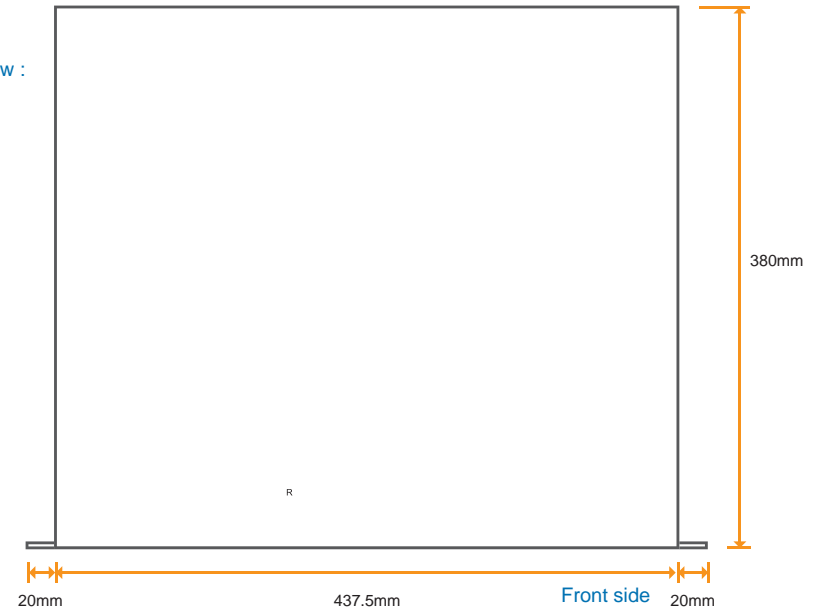

Rear view :

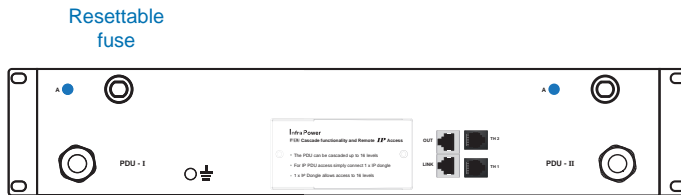

MCB
MCB or fuse :
refer to the models below

20A model :	Fuse	MCB
DH12C13-20A-WS/F_L620/3B-1	2	-
DH12C13-20A-WS/CR_L620/3B-1	-	2



- Input Rating : 20A, 208V
- Inlet : 20A NEMA L6-20P plug x 2
- Cordset : 3 meter UL 12AWG cordset x 2
- Protection : 20A resettable fuse or 20A hydraulic MCB x 2
- Circuit Details : < PDU I > Output 16A max. C 1 3 # 1 - 6
 < PDU II > Output 16A max. C 1 3 # 1 - 6

Remarks : To comply with UL® / National Electrical Code (NEC), the branch circuit Amp has been de-rated to 80% of the original.

Single phase switched PDU

Outlet : 10A Rated IEC320 C13 x 12



i-Tech Company LLC
 TOLL FREE: (888) 483-2418
 EMAIL: info@iTechLCD.com
 WEB: www.iTechLCD.com

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2017 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (WS Switched PDU)

- Local Display : Field replaceable 2.8" color LCD with touchscreen
- Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
- Outlet Control : Outlet Switch ON / OFF
- Accuracy : ±1% true RMS
- IP Access : via IP dongle, one IP Access up to 16 PDU Levels
- Cascade : Up to 16 PDU under single IP address via IP dongle
- SNMP : via IP dongle
- Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

- EMC Compliance : FCC & CE certified
- Safety Compliance : CE / LVD certified
- Environment Compliance : RoHS2 & REACH

- Operating Temperature : -5 to 60 °C
- Storage Temperature : -25 to 65 °C
- Operating Altitude : 0 to 2,000 m
- Storage Altitude : 0 to 15,000 m
- Humidity : 8 to 95% RH, non-condensing

- Dimension : 437.5 (W) x 380 (D) x 88.9 (H) mm
- Material : Steel
- Color : Black (chassis)