
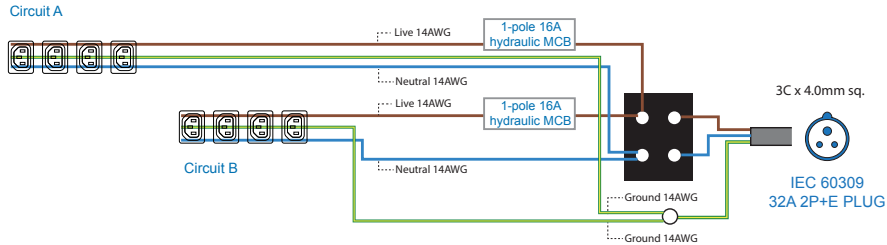


## Model : PD-8-32A-IEC60309

- Basic vertical PDU
- 230V / 32A
- 8 x C13 (bundled with security sleeves)
- 2 x 16A single pole hydraulic circuit breaker
- Bottom feed, 3M power cord with 32A IEC 60309 2P+E plug
- Free mounting brackets / tool-less button kit

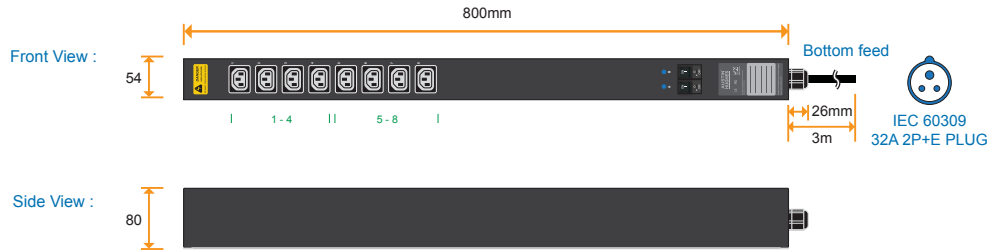

### Single phase basic PDU

Input Rating : 32A, 230V  
 Outlet : 10A Rated IEC320 C13 x 8  
 Inlet : 32A IEC60309 2P+E plug  
 Cordset : 3 meter 4mm sq. H05V V-F cordset  
 Protection : 16A single pole hydraulic MCB x 2  
 Circuit Details : < **Circuit A** > Output 16A max. C13 #1-4  
 < **Circuit B** > Output 16A max. C13 #5-8

EMC Compliance	:	FCC & CE certified
Safety Compliance	:	CE / LVD certified
Environment Compliance	:	RoHS2 & REACH
Operating Temperature	:	0 to 45 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity	:	8 to 95% RH, non-condensing

Dimension	:	54 (W) x 80 (D) x 800 (H) mm
Material	:	Steel
Color	:	Black