

PPC-5190

Intel® Pentium® 4/Pentium® Dual-Core Processor with 19" SXGA TFT LCD and Touchscreen



Features

1. 19" TFT SXGA LCD
2. Intel® Pentium® 4 / Celeron® D CPU support FSB 533MHz up to 2.8GHz
3. DDR 266/333MHz DIMM memory up to 4GB
4. Dual Gigabit Ethernet support
5. One Compact Flash® Type II socket
6. Easy installing and mechanism design
7. IP 65 compliant aluminum die-casting front panel




Specifications


		PPC-5190GS/8522	PPC-5190A-R11/9455
Display	LCD Size	19"	
	Max Resolution	1280(W) x 1024(H)	
	Brightness (cd/m2)	300	
	Contrast Ratio	700:1	
	LCD Color	16.7M	
	Pixel Pitch (mm)	0.294(H) x 0.294(V)	
	Viewing Angle (H-V)	170/160	
	Backlight MTBF (hrs)	50,000	
Motherboard	SBC Model	POS-8520	POS-9455
	CPU	Socket 478 Intel® Pentium® 4, Celeron M with 533MHz(max.) FSB	LGA 775 Socket with Intel® Core™2 Duo, Celeron® D with 533/800/1066 MHz
	Chipset	Intel 852GME + ICH5	Intel® 945G + ICH7R
	RAM	Supports two 266/333MHz DDR DIMM (4GB Max.)	Supports two 400/533/667MHz DDR2 DIMM (4GB Max.)
I/O Ports and Switches		4 x RS232 COM Port	4 x RS232 COM Port
		1 x RS-232/422/485 Port	1 x RS-232/422/485 Port
		2 x RJ-45 for LAN Port	2 x RJ-45 for LAN Port
		6 x USB 2.0	6 x USB 2.0
		1 x VGA Port	1 x VGA Port
		1 x Audio (Line-in, Line-out, MIC-in)	1 x Audio (Line-in, Line-out, MIC-in)
		1 x PS/2 (KB/MS)	1 x PS/2 (KB/MS)
		1 x Power Switch	1 x Power Switch
		1 x PCI Slot	1 x AT / ATX Switch
			1 x PCI Slot
Driver Bay	HDD Driver Bay	1 x 2.5" SATA/IDE HDD bay with anti-shook	1 x 2.5" SATA HDD bay with anti-shook
	SSD	CF Type II	
	CD-ROM Driver Bay	Slim Type CD-ROM Bay	
Extension Slot		1 x PCI slot	1 x PCI slot 1 x PCIe mini card 1 x PCIe by 1 slot (Option)
Physical	Construction Front Panel	Aluminum	
	Construction Chasis	Heavy-duty Steel	
	Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm	
	Front Panel Color	Silver (Pantone 8001C)	
	Dimension (WxHxD) (mm)	483 x 399 x 115.2	483 x 399 x 115.2
	Net Gross Weight	12.6 Kg / 18.2 Kg	
Environment	Operation Temperature (°C)	-10°C ~ 50°C	
	Storage Temperature (°C)	-20°C ~ 60°C	
	Vibration	5~17Hz, 0.1" double amplitude displacement 17~640Hz, 1.5G acceleration peak to peak	
	Shoock	10G acceleration part to part (11ms)	
Touch Screen	Resistive Type 5-Wire with RS-232 interface		
Power Supply	ATX AC-Input	AC Input ATX Power Supply - P/N: ACE-4518AP-RS - 180W Power Supply - Input: 90VAC~240VAC, 50/60Hz - Output(max.): 3.3A@16.8A, 5V@12A, 12V@10A, -12V@0.8A	AC Input ATX Power Supply - P/N: ACE-A622A-RS - 220W Power Supply - Input: 90VAC~264VAC, 50/60Hz - Output(max.): 3.3A@14A, 5V@16A, 12V@10A, -12V@0.8A
	ATX DC-Input	DC Input ATX Power Supply - P/N: ACE-4520C-RS - 200W Power Supply - Input: 24VDC, 50/60Hz - Output(max.): 3.3A@12A, 5V@12A, 12V@15.4A, -12V@0.5A	DC Input ATX Power Supply - P/N: ACE-4520C-RS - 200W Power Supply - Input: 24VDC, 50/60Hz - Output(max.): 3.3A@12A, 5V@12A, 12V@15.4A, -12V@0.5A
Front Panel Protection	IP65 Compliant		
Certificate	Meets CE, FCC		
Ethernet	Dual Realtek RTL8110S GbE LAN		Dual Broadcom RTL8111CP PCIe Controllers
Audio	AC' 97 2.3 Realtek ALC 655		AC' 97 2.3 Realtek ALC 883

Dimensions (Unit: mm)

▼ PPC-5190G/8520

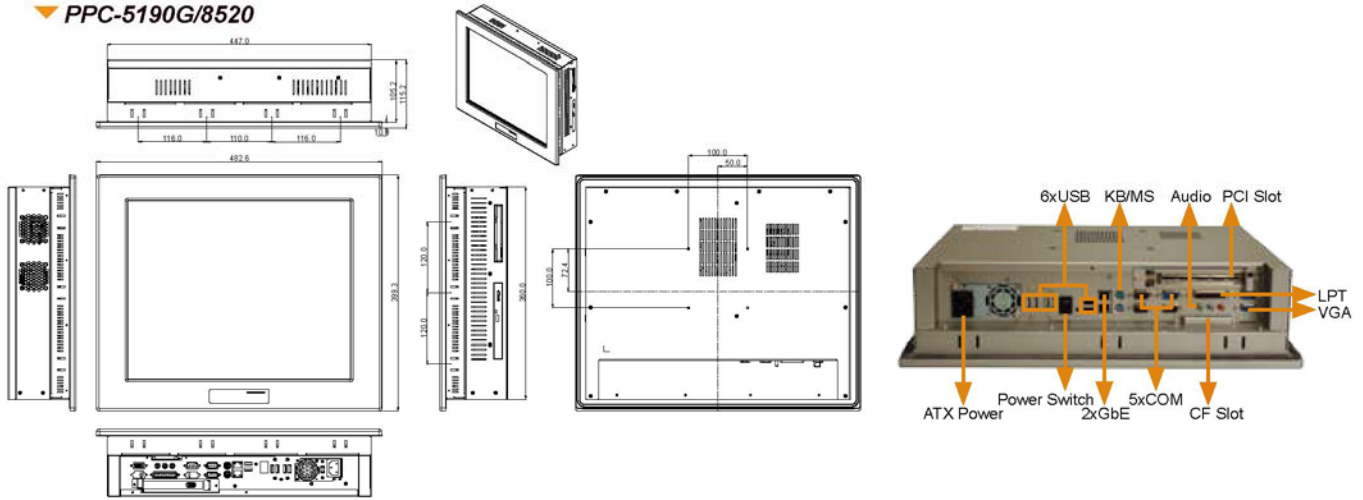

▼ PPC-5190A/9455

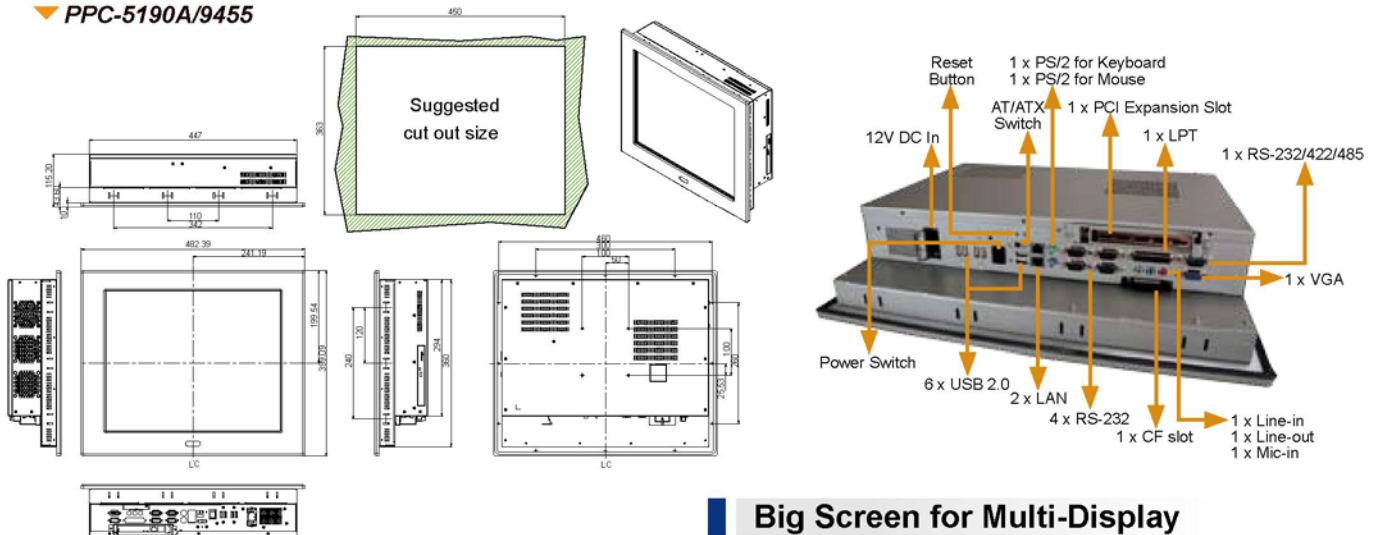

Packing List

Description	Part Number	Amount
Slim Type Floppy Packing	19B00-000013-RS (PPC-5170GS/8520)	1
Slim Type CD-ROM Packing	19B00-000032-RS	1
HDD IDE Cable (44-pin + 2 x 40-pin)	32200-014506-RS (PPC-5170GS/8520)	1
HDD IDE Cable (44-pin + 40-pin)	32200-019201-RS (PPC-5170GS/8520)	1
HDD SATA Cable	32000-077000-RS	1
Screw Kit	19600-000078-RS	1
Jumper Pack	33100-000079-RS	1
Power Cord	32000-000002-RS	1
Panel Mounting Kit	PK-190M	1
Wall Mounting Kit	WK-190MS-R10	1
Touch Screen Driver CD / Touch Pen		1
User Manual & Driver CD		1

Ordering Information

Intel® 852GM Platform	PPC-5190GS/8520-P4-28G/4518AP/T-R/1GB	19" 300 cd/m ² SXGA TFT Panel PC with POS-8522,P4-2.8GHZ FSB533,1GB RAM,ACE-4518AP and touch screen Silver color,RoHS
	PPC-5190GS/8520-P4-28G/4520C/T-R/1GB	19" 300 cd/m ² SXGA TFT Panel PC with POS-8522,P4-2.8GHZ FSB533,1GB RAM,ACE-4520C and touch screen Silver color,RoHS
Intel® 945GM Platform	PPC-5190A-R11/9455-E2160/A622A/T-R/1GB	19" 300cd/m ² SXGA panel PC with POS-9455 R11 version,Pentium® Dual-Core E2160 1.8GHz CPU, 1GB DDR2 RAM, Silver color,PSU ACE-A622A, touch screen, RoHS
	PPC-5190A-R11/9455-E2160/4520C/T-R/1GB	19" 300 cd/m ² SXGA panel PC with POS-9455 R11 version,Pentium® Dual-Core E2160 1.8GHz CPU, 1GB DDR2 RAM, Silver color, PSU ACE-4520C, touch screen, ,RoHS

Big Screen for Multi-Display



PPC-5190GS equips 19" TFT LCD which is ideal for multi-display requirement such as digital surveillance or multi-operating system. With multi-display configuration, users can handle more tasks at the same time as well as saving resource and space.

Options

Panel Mounting Kit	PK-190M
Wall Mounting Kit	WK-190MS-R10
Rack mount kits	RK-190MS-R10
LCD Monitor Arm	ARM-31-RS
LCD Monitor Stand	STAND-210-RS
PCIe x 4 slot with PCIe x1 Signal Riser Card	134D270-00-102-RS (For PPC-5190A Only)



Distributed by:

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@i-techcompany.com • WEB: www.i-techcompany.com