

# PPC

## PPC-7365F

### Fanless and Low Power 15" Panel PC


#### Features and Benefits:

- True fanless thermal solution
- low power and economical solution
- On board IDE interface Type-II compact flash slot
- Touch screen support
- I/O port highlights:
  - 4 powered serials,
  - 1 parallel,
  - 2 USBs,
  - 1 VGA,
  - 1 keyboard,
  - 1 mouse,
  - 1 10M/100M/1G Base-TX LAN,
  - 1 line-in/-out/mic
- 1 x CF slot on the left side
- Industry level of durability
- Against dust and powerful jetting




# PPC-7365F *Fanless and Low Power 15" Panel PC*


**Front View**

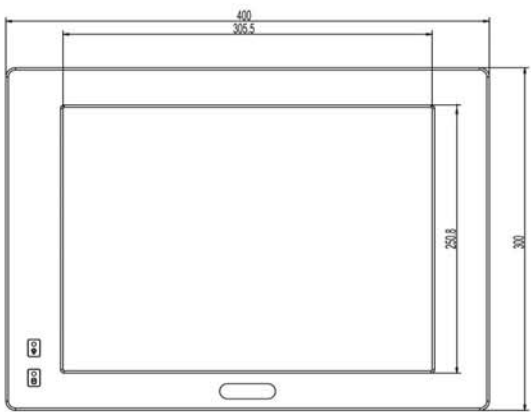

**Rear View**

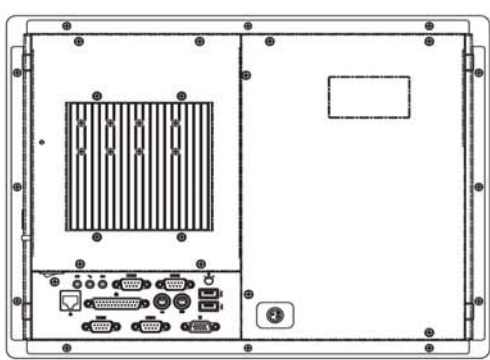

**Side View**

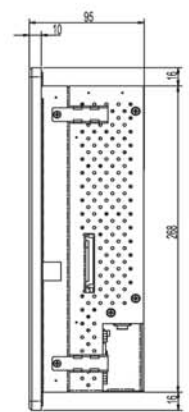

Unit: mm

**Specification**

| Systems                  |   |
|--------------------------|---|
| <b>CPU Support</b>       | VIA Eden™ 733MHz on board                         |
| <b>Memory Support</b>    | 1 x DIMM, PC133 memory up to 512M SDRAM           |
| <b>Front Bazel</b>       | Aluminum  |
| <b>Open Frame</b>        | No  |
| <b>IP65/NEMA4</b>        | Yes   |
| <b>Power Supply</b>      | DC 80W power supply                               |
| <b>O.S. Support</b>      | Win 98SE/2000/XP/CE.net, Linux Redhat 8.0/9.0     |
| <b>Dimension (WxHxD)</b> | 280 x 400 x 300 x 123mm (15.75" x 11.81" x 4.84") |
| <b>System Weight</b>     | 8 Kg (17.63lb)                                    |

**I/O Ports**

|                    |  |
|--------------------|--|
| <b>USB</b>         | 2 x USB1.1   |
| <b>KB/Mouse</b>    | 2  |
| <b>Audio</b>       | Line in/Line out/MIC in  |
| <b>Parallel</b>    | 1 x parallel port (SPP/EPP/ECP)  |
| <b>Serial Port</b> | 4 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485, COM 2/3/4 supports +5V only |
| <b>Digital I/O</b> | N/A  |
| <b>LAN</b>         | 10/100/1000 Mbps   |

|                           |                                       |
|---------------------------|---------------------------------------|
| <b>VGA</b>                | 1                                     |
| <b>Brightness Control</b> | VR on rear panel                      |
| <b>Drive Bay</b>          | 1x 2.5" HDD, 1x IDE CF, 1xSilm CD-ROM |
| <b>Expansion Slots</b>    | N/A                                   |

**Display**

|                     |                                     |
|---------------------|-------------------------------------|
| <b>LCD</b>          | 15" XGA TFT LCD                     |
| <b>Touch Screen</b> | 5W Analog resistive (USB interface) |

**Environment**

|                        |             |
|------------------------|-------------|
| <b>Operating Temp.</b> | 0° ~ 40°C   |
| <b>Storage Temp.</b>   | -20° ~ 60°C |
| <b>Humidity</b>        | 20% ~ 90%   |

**Ordering**

|                          |  |
|--------------------------|--|
| <b>PPC-7365F</b>         | panel PC with 15" LCD, VIA Eden 733 MHz CPU board, resistive touchscreen , 80W DC power supply |
| <b>EFSP120-ACB</b>       | 120W, 24 Vdc output adaptor  |
| <b>PPC-7365F-VESAKIT</b> | VESA bracket   |

