

# PPC



## PPC-7500F

### Fanless and High Performance 10.4" Panel PC

#### Features and Benefits:


- True fanless thermal solution
- Small size, low power and economical solution
- Built-in giga LAN
- On board IDE interface Type-II compact flash slot
- Touch screen support
- 24v DC power support
- I/O port highlights:
  - 2 powered serials,
  - 1 parallel,
  - 2 USB2.0,
  - 1 keyboard,
  - 1 mouse,
  - 1 10M/100M/1G Base-TX LAN,
  - 1 line-in/-out/mic
  - 1 x CF slot on the left side (IDE interface)
- Industry level of durability
- Against dust and powerful jetting




# PPC-7500F

Fanless and High Performance 10.4" Panel PC


Front View

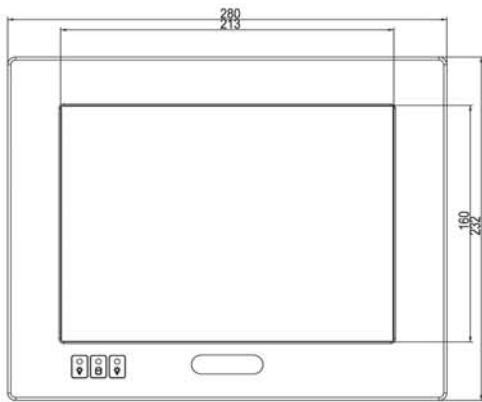

Rear View

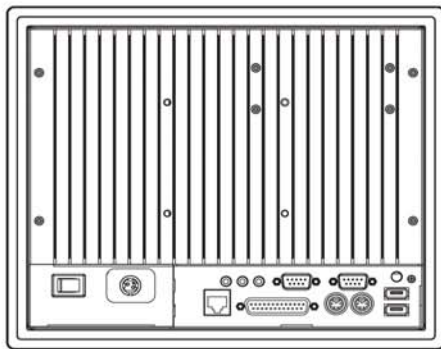

Side View

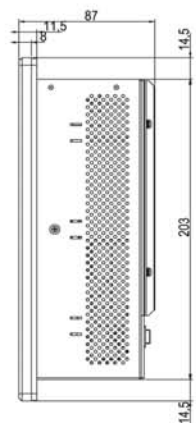

Unit: mm

## Specification

Systems	
<b>CPU Support</b>	Intel Celeron® M ULV 1.0GHz on board
<b>Memory Support</b>	1 x 200pin DDR SO-DIMM, Support DDR 333 SDRAM up to 1GB
<b>Front Bazel</b>	Aluminum
<b>Open Frame</b>	Yes (optional)
<b>IP65 / NEMA4</b>	Yes
<b>Power Supply</b>	DC 24Vin 80W power supply / AC100-240Vin (optional power adaptor)
<b>O.S. Support</b>	Win 98SE / 2000 / XP / CE.net, Linux Redhat 8.0/9.0
<b>Dimension (W x H x D)</b>	280 x 232 x 80 mm (11.02" x 9.13" x 3.15")
<b>System Weight</b>	7 Kg (13.22lb)
<b>VESA Mounting Support</b>	75mm
<b>Certificate</b>	CE / FCC

## I/O Ports

<b>USB</b>	2 x USB2.0
<b>KB / Mouse</b>	2
<b>Audio</b>	Line in / Line out / MIC in
<b>Parallel</b>	1 x parallel port (SPP / EPP / ECP)
<b>Serial Port</b>	2 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485, supports +5V only

<b>Digital I/O</b>	N/A
<b>LAN</b>	10/100/1000 Mbps
<b>VGA</b>	N/A
<b>Brightness Control</b>	VR on rear panel
<b>Drive Bay</b>	1x 2.5" HDD, 1x IDE CF slot on board
<b>Expansion Slots</b>	N/A

Display	
<b>LCD</b>	10.4" SVGA TFT LCD
<b>Touch Screen</b>	5W Analog resistive (USB interface)

Environment	
<b>Operating Temp.</b>	0 ° ~ 40 °C
<b>Storage Temp.</b>	-20 ° ~ 60 °C
<b>Humidity</b>	20% ~ 90%

## Ordering

<b>PPC-7500F</b>	FanlessPanel PC with 10.4" LCD, Intel Celeron M ULV 600MHz CPU board, resistive touchscreen, 80W DC power supply
<b>EFSP120-ACB</b>	120W, 24 Vdc output power adaptor