

PPC

PPC-7505

With Pentium® M
Solution 15" Panel PC

Features and Benefits:

- Supports Intel® Pentium® M / Celeron® M CPU up to 1.8 GHz
- Intel® 855GME Chipset
- Low power consumption and economical solution
- Compact size with high performance
- High speed Gigabit LAN
- On-board IDE interface, Type II CompactFlash slot
- High precision touchscreen
- Optional PCI Expansion slot (1 or 3 slots)




ISO CERTIFIED
9001 14001


PPC-7505

With Pentium® M 15" Panel PC


Front View

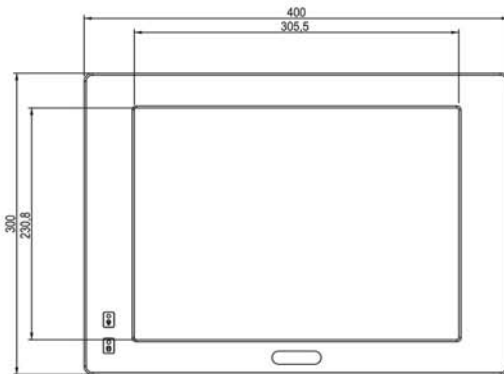

Rear View

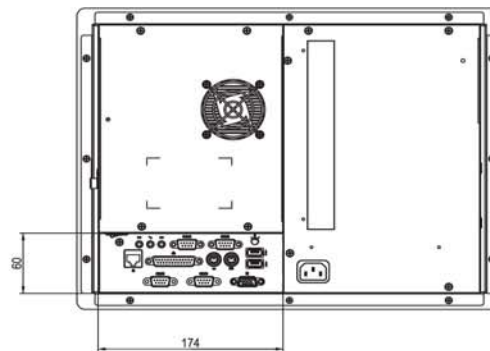

Side View



Unit: mm

Specification Systems	
CPU Support	Intel® Pentium® M / Celeron® M up to 1.8GHz
Memory Support	1 x 200pin DDR SO-DIMM, support DDR 333 SDRAM up to 1GB
Front Bazel	Aluminum
IP65/NEMA4	Yes
Power Supply	AC 110W power supply
O.S. Support	Win 98SE/2000/XP/CE.net, Linux Redhat 8.0/9.0
Dimension (WxHxD)	400 x 300 x 99 mm (15.6" x 11.7" x 3.89")
System Weight	9 Kg (20.9lb)
VESA Mounting Support	75mm / 100mm VESA bracket (optional)
Certificate	CE / FCC

I/O Ports	
USB	2 x USB2.0
KB / Mouse	2
Audio	Line in / Line out / MIC in
Parallel	1 x parallel port (SPP / EPP / ECP)
Serial Port	4 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485, COM 2/3/4 supports +5V only

LAN	10/100/1000 Mbps
VGA	1
Brightness Control	VR on rear panel
Drive Bay	1 x 2.5" HDD, 1 x IDE CF slot on board, 1 x Slim CD-ROM (optional)
Expansion Slots	1 x PCI or 3 x PCI slot (optional)

Display	
LCD	15" XGA TFT LCD (1024 x 768)
Touch Screen	7W Analog resistive (USB interface)

Environment	
Operating Temp.	0° ~ 40°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%

Ordering	
PPC-7505	Panel PC with 15" LCD, S478 Pentium M CPU board, resistive touchscreen, 110W AC power supply
PPC-7500-1P	1 x PCI riser card for PPC-7505/7507
PPC-7500-3P	3 x PCI riser card for PPC-7505/7507
PPC-VESAKIT	VESA bracket