

PPC

PPC-7405

Socket 478 P4/P4-M/
Celeron® 15" Panel PC

Features and Benefits:

- High performance for multimedia solution
- Modularized panel and main case
- Switchable 12.1", 15" or 17" panel (optional)
- VESA standard wall mount bracket (optional)
- 1 x HDD (standard)
- 1 x FDD (slim)
- 1 x CD-ROM (slim)
- I/O port highlights:
 - VGA
 - 4 serials, +5V or +12V seletable
 - 1 parallel
 - 2 USB
 - 1 keyboard
 - 1 mouse
 - 1 10/100/1000Mbps LAN,
 - 8 DI/ 8DO
 - line-in/-out/mic
- Industry level of durability
- Spill proof water-resistant design



Intel®
Communications.
Alliance
Affiliate Member
BRONZE

ISO CERTIFIED
9001 14001


PPC-7405

Socket 478 Pentium® 4 15" Panel PC


15" Panel Front View



12.1" / 15" / 17" Modularizing View

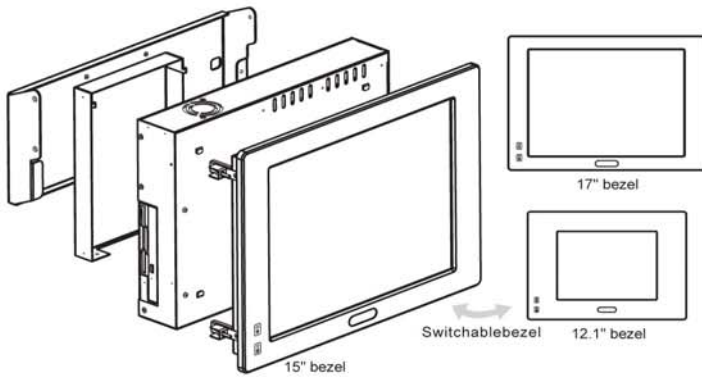

Connector Description

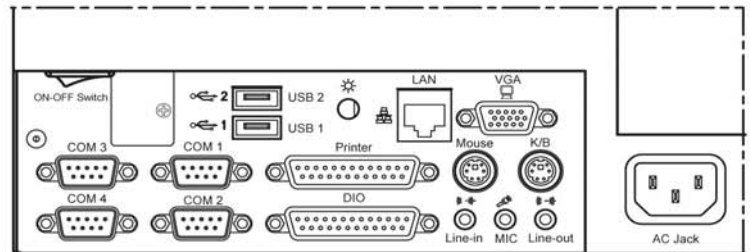

Specification

Systems	
CPU Support	Intel® Pentium® 4/ Pentium® 4-M/ Celeron® Up to 2.8GHz
Memory Support	1 x DIMM, DDR333 memory up to 1GB max.
Front Bazel	Aluminum
Open Frame	Yes
IP65/NEMA4	Yes
Power Supply	AC 200W power supply
O.S. Support	Win 98SE/2000/XP, Linux 8.0/9.0
Dimension (WxHxD)	400 x 300 x 99 mm (15.6" x 11.7" x 3.89")
System Weight	9.5 kg (21.38lb)
VESA Mounting Support	75mm /100mm VESA bracket (optional)
Certificate	CE/FCC/LVD/ULx

I/O Ports

USB	2 x USB2.0
KB/Mouse	2
Audio	Line in/Line out/MIC in
Paralle	1 x parallel port (SPP/EPP/ECP)Yes
Serial Port	4 x COMs (pin 9 support +5V or +12V), COM2 for RS232/422/485

Digital I/O	8 DI / 8 DO
LAN	10/100/1000 Mbps
VGA	1600 x 1200 max.
Brightness Control	VR on rear panel
Drive Bay	1 x 3.5" HDD, 1 x slim CD, 1 x slim FDD, 1 x DOC (build-in riser card)
Expansion Slot	1 x PCI + 1 x ISA or 3 x PCI + 3 x ISA

Display

LCD	15" SXGA TFT LCD
Touch Screen	Analog resistive (USB interface)

Ordering

PPC-7405	panel PC with 15" LCD, S478 P-4 CPU board, resistive touchscreen, 200W AC power supply
PPC-7400-CFKIT	IDE CF card
PPC-7400-1P1I	1 x PCI + 1 x ISA riser card for PPC740X
PPC-7400-3P3I	3 x PCI + 3 x ISA riser card for PPC740X
PPC-7400-VESAKIT	VESA bracket