



RD900S
9" Director type On-Camera Portable LCD Monitor
for outdoor shooting HD, SD and analog video
signal input and display.

RD900 series portable LCD monitors are the latest portable HD monitor products based on market demand . The products also highlight its positioning of professional, practical and economical. Since early 2011 they received so much good comments from professional users, and have been applied to the Guangzhou Asian Games and the Shenzhen Universiade scene.



Simple, sophisticated appearance design

Difference from other stand-alone products is that RD900 series shell use a special design technique. That is combining metal and plastic which can have much richer details change in the industry design. As a representative of Japanese industrial products design, the design elements and style of design will be performed like this. The control pane of RD900 series integrates a variety of design elements, such as the convex TALLY light, three-dimensional frame, the arc keyboard. All the delicate expressing technique and reasonable function sets reflect the artistic industrial product design idea . Taking into account of the convenience of application, but also reflecting the aesthetic experience of exterior design. All- metal shell make the product more robust and durable, also is a good solution to the heat dissipation problem.




The three-dimensional frame feels more like the metal material after a special treatment , and the peripheral part with delicate surface ,forming a sharp contrast, reflecting the products much richer sense of the depth

DV battery plate

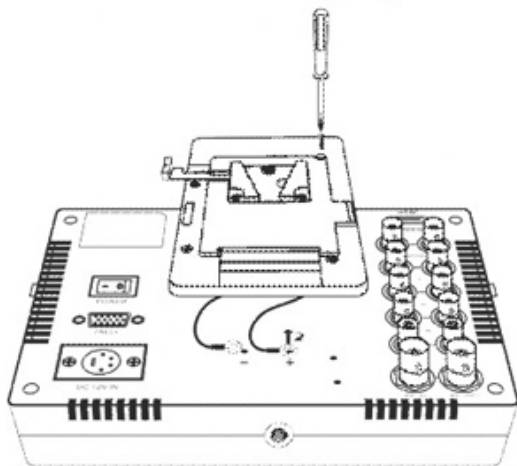

▲ BP battery holder



▲ Anton battery holder

Convenient battery interface

Sony and Anton battery adapter can be easily mounted on the back of the monitor ,a 14.4V/100Wh camera battery can power RD900 series not less than 8 hours



Multiple Inputs

Multiple input formats to meet all HD, SD, analog video signal input and display demand



Professional functions set

Embedded audio, Monochrome conversion, Underscan/overscan, Safety markers and so on.

Multiple power supplying methods

Same as other portable product, RD900 series has three power supplying methods: AC power adaptor, external camera battery, sharing the battery with the camera.




Flexible configuration

RD900 series can be changed to jib monitors by selecting different accessories



Work with the sunshade

Sunshade is the innovative product specially designed for iTechLCD multiple portable monitors, which has obtained the national patent.

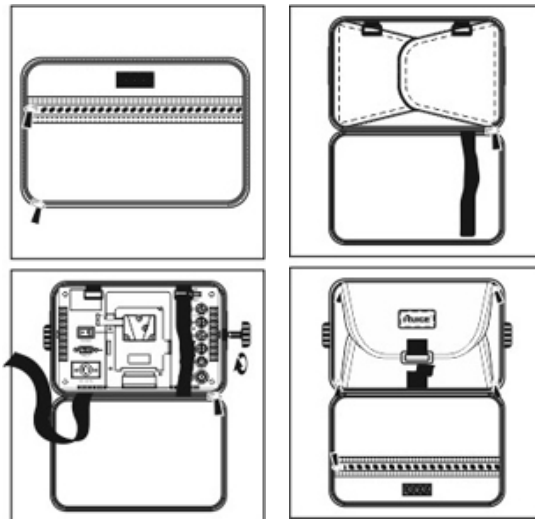

Specification:

Screen Size	9"
Resolution	800 (H) ×480 (V)
Dot Pitch	0.2327 (H) ×0.2327 (V) mm
Aspect Ratio	16:9 / 4:3 Switchable
Brightness	250cd/m ²
Contrast	500:1
Response Time	10 ms
Viewing Angle	H 140° / V 120°
Voltage Input	DC12V
Voltage Range	DC 6~36V
Power Consumption	≤15W
Monitor Size	L 218.8×H 176×D 48 mm
Weight	1.6 kg

Inputs & Functions:

Model Function		RD900HD	RD900S	Remark
Video input	Composite	•	•	BNC X1line 1.0 Vp-p±3 dB
	SD-SDI	•	•	BNC X1line
	HD-SDI	•		BNC X1line
	HDMI	•	•	HDMI x 1Line
Audio input		•	•	RCA x1Line (dual channel)
Audio Monitoring		•	•	Rear Speaker: 2 x 0.5W (8Ω) Earphone: 3.5mm jack
SDI Embedded Audio		•	•	PPM / UV
Video output	Composite	•	•	BNC X1line Loop through 75Ω automatic termination
	SD-SDI	•	•	BNC X1line
	HD-SDI	•		BNC X1line
TALLY		•	•	Red/green two colors

RD900S Functions Table:

Signal Function	SDI1	HDMI	COMPOSITE (CVBS)
Marks : Safety mark, Center mark, Title frame	•	•	•
Scaling : 16:9, 4:3, LETTER BOX, Built-in scan, Overscan	•	•	•
Pixel to Pixel			
Color temperature 9300/6500 , adjustable	•	•	•
4 channels audio meter display	•		
Red/Green two colors TALLY display (hardware)	•	•	•
Monochrome (BLUE ONLY)	•	•	•

Mechanical Drawing:

