

Rugged Completely Sealed IP66/NEMA4X Stainless Steel Chassis/Surface Mount


32" LCD monitor LED backlight, 1920 x 1080, 350 nits, with 2mm AR glass, VGA and DVI input

Model: SCHW3200-SIP



FEATURES

Rugged Completely Sealed IP66/NEMA4X Stainless Steel Chassis/Surface Mount with All-in-One PC Fanless Solution

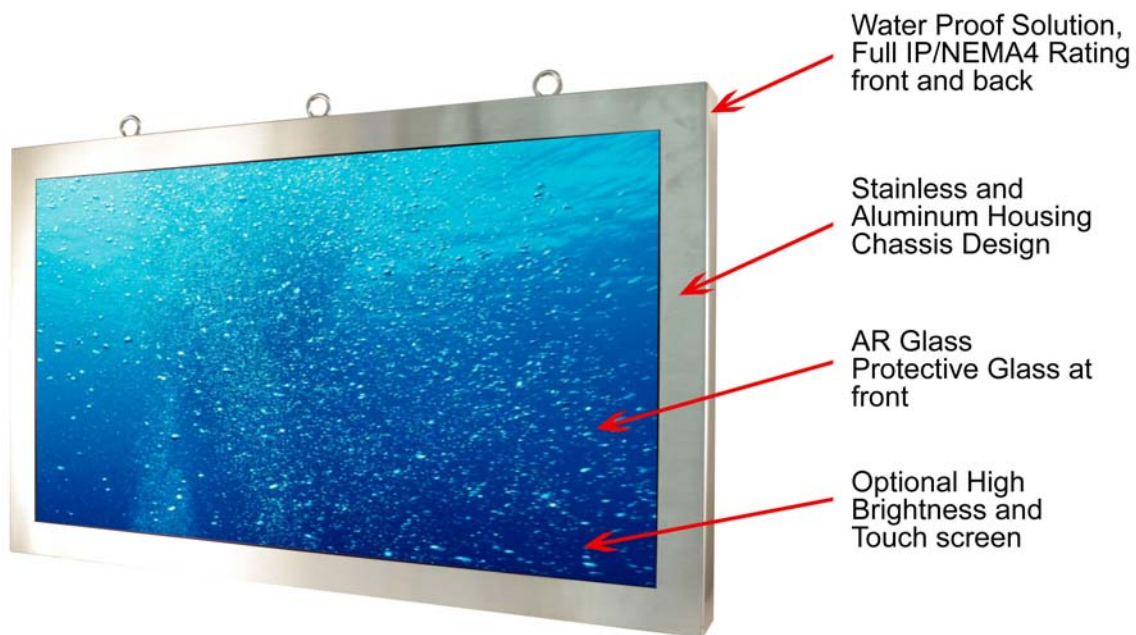

- IP65 Water and Dust proof connection for a higher protection
- All Connectors are facing down, it will have you to save space



SPECIFICATIONS

Size / Type	32" LED Panel
Resolutions	1920 x1080
Brightness	350 cd / m ² (typ.)
Contrast Ratio	3000 : 1 (typ.)
Viewing Angles	- 89 ~ 89(H) ; - 89 ~ 89(V)
USB	2 x USB 2.0
LAN	Wake On LAN
Power Requirement	AC100-240V
Operation Temperature	32 ~ 140°F (0~60°C)
Operation Humidity	5% to 95%RH (non-condensing)

ACCESSORIES

- Water proof USB cables - 2M x 2
- Water proof cat5 cable - 2M x 1
- Water proof power cable - 2M x 1

Actual installation in US factory (Part no. SCHW5500HB-SIP)



Model: SCHW4200-SIP



DRAWINGS

