

SLK-101C

Backlit Industrial Keyboard with QuickLock™

iKey's SlimKey™ SLK-101C keyboard provides full-sized versatility in a rugged, compact design. Designed for easy cleaning, the SLK-101C features an integrated "QuickLock™" to disable the keyboard functions during cleaning procedures. It also features green LED backlit keys for use in areas with minimal lighting.



Engineered for NEMA 4X protection from dust, water and corrosive liquids, the SlimKey™ SLK-101C is ideal for use in industrial, medical and material handling applications. The large numeric pad on the SLK-101 allows for easy data entry, while the robust polycarbonate case stands up in the roughest of conditions.

Technical Specifications


Certifications	NEMA 4X UL60950, FCC Part 15 Class B
Shock	3x11 ms pulses of 50g on each of 3 axes
Cable	LENGTH: 10' straight USB (3 m)
Key Switch	MATERIAL: Industrial silicone rubber LIFE: 10 million cycles TRAVEL: 0.055 in. (1.4mm) ACTUATION FORCE: 7.05 oz. +/- 1.06 oz. (200g +/- 30g) FEEDBACK: Tactile with mechanical snap
Vibration	POWER SPECTRAL DENSITY: 0.04g/Hz FREQUENCY RANGE: 20Hz - 2 kHz DURATION OF TEST PER AXIS: 3 hours
Power	USB: 210mA@5V (from CPU port)
Flammability	PRINTED CIRCUIT BOARD: 94 VO SILICONE OVERLAY: 94 HB INTERFACE CABLE: 94 VO
Compatibility	USB: All Windows and Macintosh OS
Temperature Range	STORAGE: -40C to +90C (-40F to +194F) OPERATING: -40C to +70C (-40F to +158F)
Weight	1.5 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)
Warranty	1 year limited warranty
Humidity	100%
Dimensions	14.60" x 5.55" x 0.92" (w-h-d) 370.8mm x 141mm x 23.4mm
Model Numbers	

Features and Benefits

- 10-Key Numeric Pad
- Green Backlit Keys
- Slim, Compact Design
- QuickLock™
- 12 Function Keys
- MS Windows Function Keys
- USB configurations available

SLK-101C

DATE	CHANGES	INTL	REV
09.08.11	Original	TH	1.00

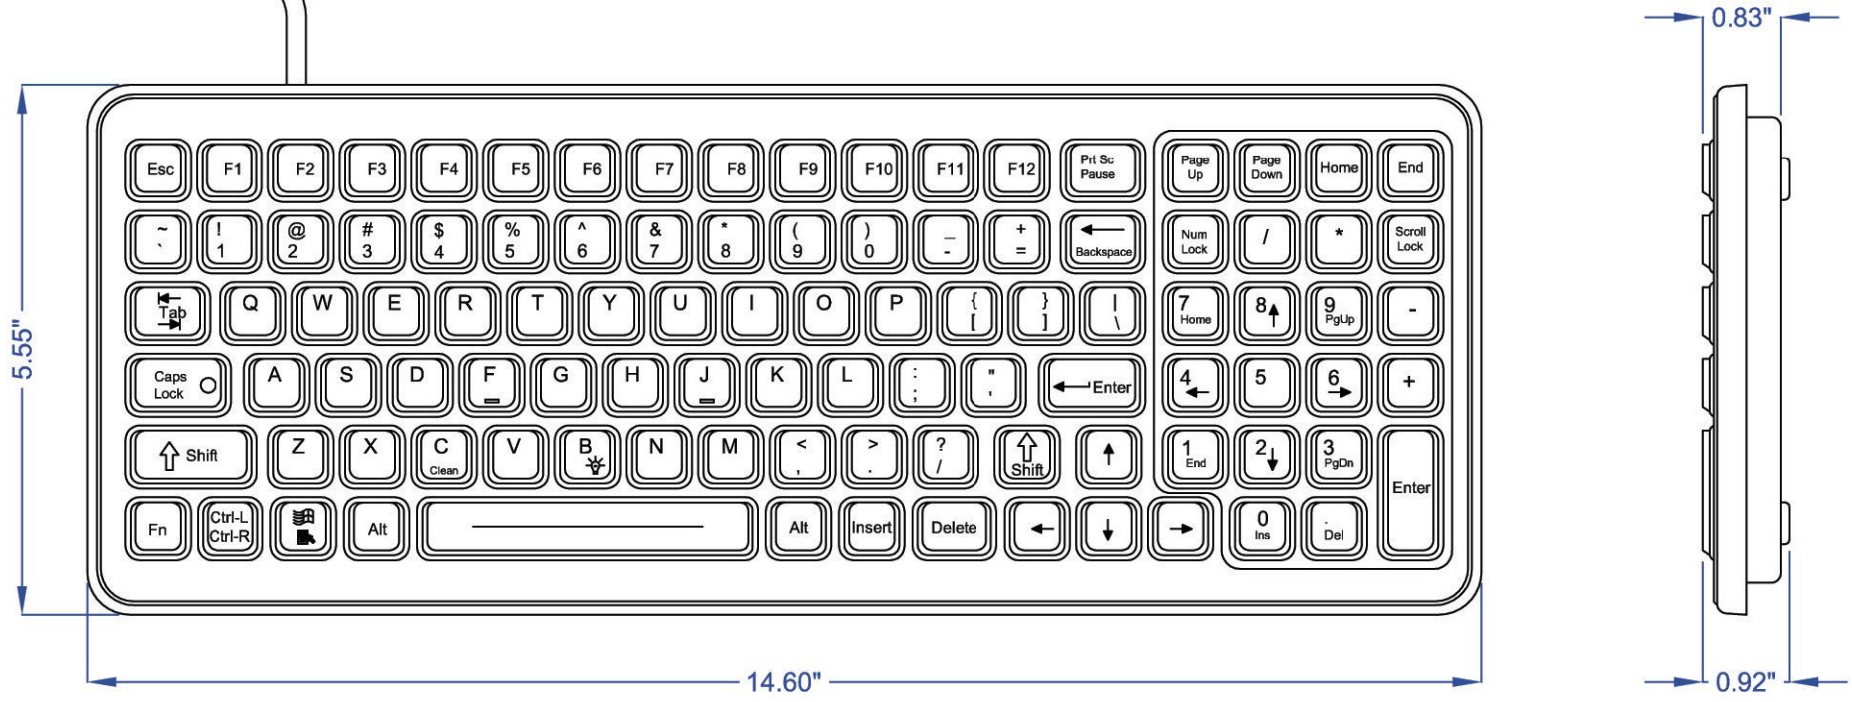

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

USB: 210mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

Part Number: SLK-101C	Drawing Number: MKT0274	Sheet: 1 OF 1
Drawing Title: SLK-101C-MKT	Revision: 1.0	Date: 09.08.11
		TWH



Distributed by:
 i-Tech Company LLC
 TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com