

# SLK-77

## Compact Backlit Industrial Keyboard

The compact SLK-77 keyboard is packed with functionality. It features a full QWERTY keyboard layout, 12 function keys, and red LED backlighting in a rugged ABS polycarbonate case measuring 9.27" x 3.87" (width-height). The SLK-77 is designed to meet NEMA 4X specifications, with a completely sealed industrial silicone rubber keypad that can withstand the dirt, dust, water and corrosives that often exist in harsh environments. It is an excellent keyboard for material handling, mobile and industrial applications.




### Technical Specifications

Certifications	NEMA 4X, CE UL60950, FCC PART 15 CLASS B
Shock	3 x 11 ms pulses of 50g on each of 3 axes
Cable	LENGTH: 3' straight (0.91 m) DESIGN: Single Cable USB
Key Switch	MATERIAL: Industrial Silicone Rubber LIFE: Greater than 10 Million Cycles TRAVEL: 0.055 in. (1.4mm) ACTUATION FORCE: 4.76 oz. +/- 1.06 oz. (135g +/- 30g) FEEDBACK: Tactile with Mechanical Snap
Vibration	POWER SPECTRAL DENSITY: .04g/HZ FREQUENCY RANGE: 20Hz - 2Khz DURATION OF TEST PER AXIS: 3 hours
Power	USB: 200mA@5V (from CPU port)
Compatability	USB: All Windows and Macintosh OS
Temperature Range	STORAGE: -40C to +90C (-40F to +194F) OPERATING: -40C to +70C (-40F to +158F)
Weight	1.00 lbs +/- 0.10 lbs (0.45 kg +/- 0.05 kg)
Warranty	1 year limited warranty
Humidity	100% Humidity Resistant
Dimensions	9.27" x 3.87" x 0.90" (w-h-d) 235.5mm x 98.3mm x 22.9mm
Model Numbers	SLK-77-USB

### Features and Benefits

- Industrial Silicone Rubber Keypad
- Red Backlit Keys
- Ultra-Small Footprint Design
- USB configurations available

SLK-77

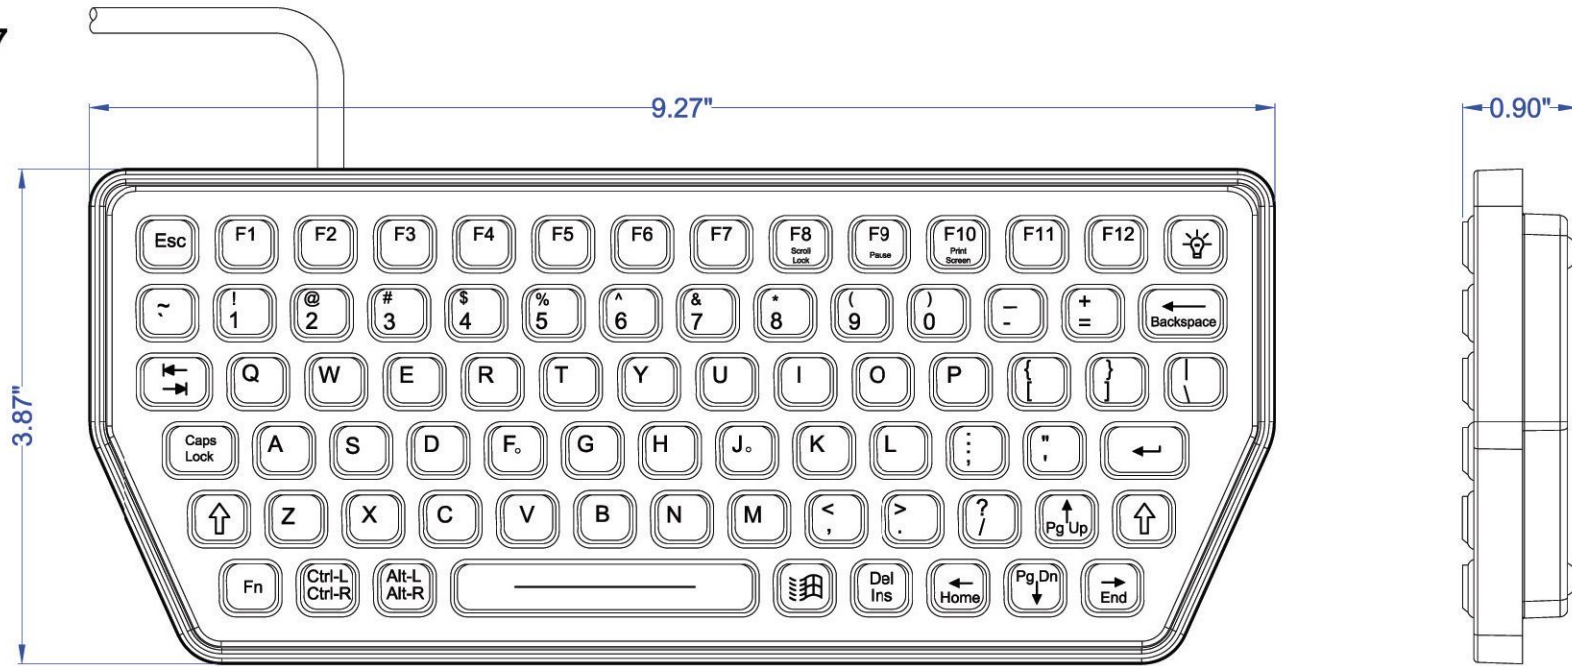

**KEY SWITCH**

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 4.76 oz. +/- 1.06oz (135g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

**TEMPERATURE RANGE**

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

**VIBRATION**

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2KHz  
 DURATION OF TEST PER AXIS: 3 hours

**POWER**

USB: 200mA@5V (from CPU port)

**HUMIDITY**

100% Humidity Resistant

**SHOCK**

3 X 11 ms pulses of 50g on each of 3 axis

**WEIGHT**

1.00 lbs +/- 0.10 lbs (0.45 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.5

Part Number: SLK-77	Drawing Number: MKT0127	Sheet: 1 OF 1	
Drawing Title: SLK-77-MKT	Revision: 2.0	Date: 06.24.09	JWB



Distributed by:

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)