

# Multi Touch Infrared Open Frame Touch Monitor

Chassis mount/Open frame IR 10 points touch display 32" 1920x1080 400nits with 4mm tempering glass VESA mounting. Support MAC and Linux, Windows 7/8/10 no need the Driver & support.

**MODEL: TCH3200-IR**



## OVERVIEW


TCH3200-IR is a 32-inch multi-touch infrared open frame touchscreen monitor which offers a cost-effective solution that can be easily connected and integrated by the users. It is well-suited for a wide range of applications including digital signage, kiosks, advertising machine, gaming, casino, interactive digital, industrial, education, and transportation, among others.

## FEATURES HIGHLIGHTS:

- Reliable quality
- Easy operation
- Economical choice
- Superb cosmetics
- Slim housing
- On-screen display
- 10-point infrared multi-touch technology
- Anti-vandal 4mm physical tempering glass
- Video input with options for VGA, DVI, and HDMI
- Standard VESA 300mm x 300mm

## SPECIFICATIONS:

<b>Description</b>	32" Infrared 10point Multitouch Open Frame Touch Monitor		
<b>Case/Bezel Color</b>	Black		
<b>Display</b>	16:9 Active Matrix TFT LCD		
<b>Optimal (native) Resolution</b>	1920x1080		
<b>Useful Screen Area</b>	698mm x 393mm		
<b>Colors</b>	16.7M		
<b>Brightness</b>	400 cd/m2		
<b>Response Time</b>	4ms (Typically)		
<b>Contrast Ratio</b>	2000:1 (Typical)		
<b>Viewing Angle(CR3=10)</b>	Horizontal: ±89° or 178° total Vertical: ±89° or 178° total		
<b>Backlight Lamp Life</b>	50000 hrs		
<b>Input Video Format</b>	VGA,DVI, HDMI Option		
<b>Input Video Signal Connector</b>	VGA ,DVI, HDMI Option		
<b>On Screen Display(OSD)</b>	Controls (back): ON/OFF, MENU, LEFT, RIGHT, AUTO		
<b>Touch Technology</b>	Leadingtouch Infrared 10Point Multitouch Touch Panel		
<b>Touch Point</b>	True 10point		
<b>OS</b>	HID-Mode for Windows 7/8/10,Linux and Android		
<b>Cover Glass</b>	4mm Tempered Anti-Vandal glass		
<b>Touch Interface</b>	USB Touch Interface		
<b>Mounting Options</b>	VESA Mount 100mm , Four side bracket option		
<b>Power Supply</b>	100-240VAC, 50-60HZ		
<b>Temperature Range</b>	Operating: 0C° to 50C°; Storage: -20C° to 60C°		
<b>Humidity Range (no condensing)</b>	Operating: 20%-80%; Storage: 10%-90%		
<b>Dimension and Weight</b>	<b>Item</b>	<b>Dimension (mm)</b>	<b>Weight (KGS)</b>
	Touch Monitor	772 x 466.7 x 74.5	21
	Box After Packing	1410 x 190 x 881	28
<b>Warranty</b>	1 Year		
<b>Agency Approvals</b>	CCC,FCC, CE, RoHS		

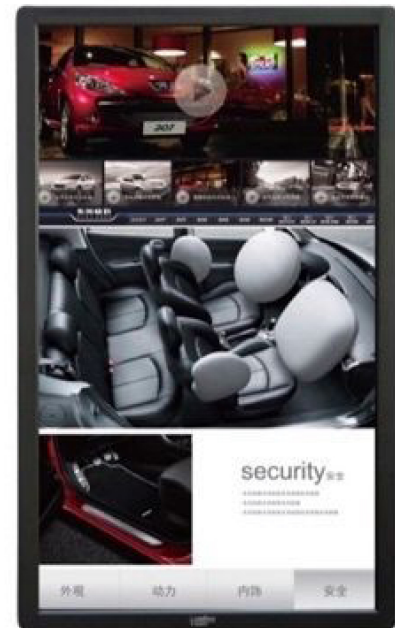

MECHANICAL DRAWING:

