


# OPEN FRAME LCD MONITOR

Open frame LCD Rear OSD with Rear Housing, 10.4" 4:3 LED 350nits, 1024x768,VGA Input, Side or Top OSD with 5 Wire Resistive Touch Screen and USB Controller

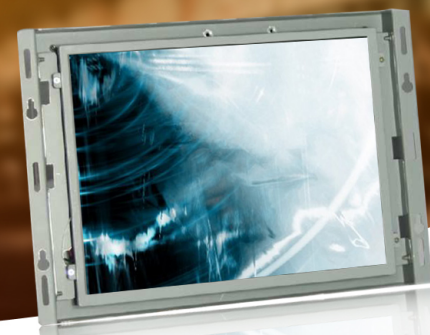

## Model: TOP1040X-TR

### FEATURES:

- \* VGA Input / Optional DVI Input
- \* Optional RCA Composite Video + Speaker / Optional HDMI Input
- \* Optional 5-Wire Resistive / Capacitive Touch supports all Windows / Linux OS
- \* 4:3 Screen LED Back-Light 300nits
- \* 4:3 LCD Panel with original resolution 1024x768

### SYSTEM SPECIFICATIONS

<b>Panel</b>	
Cell Type	Color active matrix TFT (Thin-Film-Transistor) LCD panel
Pixel Arrangement	RGB vertical stripe
Glass Surface	Anti-Glare coating
Pixel number	1024(H) x 768(V)
Pixel Pitch	0.2065(H) x 0.2065(V) mm
Display Size	10.4" viewable diagonal area
Active Area	210(H) x 158(V) mm
Color Depth	262K colors
Light Source	Long life, 50,000 hrs (typ)
Brignthess	300 cd/m <sup>2</sup> (typ)
Contrast Ratio	500 : 1
Viewing Angle	89/89/89/89
<b>Input Signal</b>	
Video	Analog RGB (0.7/1.0 Vp-p, 75 ohms)
Sync	Composite Sync
Frequency	Fh : 30 - 82Khz , Fv : 60 -75Hz
<b>Resolution</b>	
Supported	1024 x 768@60 / 70 / 75 Hz
Recommended	1024 x 768@60 Hz
<b>Control</b>	
Front Panel	Power , Menu,Select , + (Inc) , - (Dec) , Auto Adjust, Brightness, Contrast, H-Position, V-Position
Winsticker (OSD)	Phase, Color, Default,Volume , Language, Memory Recall
<b>Power</b>	
Input Voltage	AC: 90 to 260VAC, 50 / 60 Hz DC:12V/ 1.2A
<b>Power Rating</b>	
Operation	25 watt
Off	< 5 watt
<b>Audio</b>	2W x 1 Speaker
<b>Operating Condition</b>	
Temperature	-10°C ~ 65°C
Humidity	10% ~ 90% (no condensation)
<b>Storage Condition</b>	
Temperature	- 30°C ~ 70°C
Humidity	10% ~ 90% (no condensation)
<b>Dimensions</b>	
Physical	(W x H x D)
<b>Weight</b>	
N.W. / G.W.	3Kg /4Kg
<b>Options</b>	
Video-In	1× RCA-Connector 1xS-Video
Touch Screen	USB,RS-232 Interface
<b>Certification</b>	FCC, CE

**DRAWINGS**

