

Industrial Touch PANEL PC System

17" SXGA 1280x1024 Industrial Resistive Touch Panel PC, D2550
 1.86GHz CPU CPU/ 1G Memory/320GB HDD / 1GLAN / COM / SPK /
 12-28V input, IP-65 Compliant Front Panel, Onboard 2GB RAM

Model: VCPC1700AT



Features:

- Intel® Atom™ D2550 1.86GHz CPU
- VGA/ HDMI, Audio, Gigabit Ethernet
- 1 CF, 1 COM, 2 USB
- Wide Voltage +12V ~ +28V Input, ErP Power
- IP-65 Compliant Front Panel
- Power-On Timer

Specifications:

• LCD Size	17", 4:3
• Display Type	SXGA TFT
• Resolution	1280 x 1024
• Pixel Pitch	0.264mm (H) x 0.264mm (V)
• Luminance	350cd/m2
• Contrast Ratio	800
• Viewing Angle	80 (U), 80 (D), 85 (L), 85 (R)
• Response Time	30ms
• Backlight	LED
• Touch Screen	5-wire Resistive
• Light Transmission	80%
• Touch Interface	USB Touch Control Board EETI

System	
• CPU	Onboard Intel® Atom™ D2550 1.86GHz CPU
• System Chipset	Intel® NM10 Chipset
• I/O Chip	E/C IT8518E
• System Memory	One 204-pin SODIMM Supports Up to 4GB DDR3 1066MHz SDRAM
• Storage	One Type I/II Compact Flash Socket One 2.5" HDD Bay
• Watchdog Timer	Reset: 1sec. ~ 255min. and 1sec. or 1min./step
• H/ W Status Monitor	Monitoring System Temperature, Voltage, and Cooling Fan Status with Auto Throttling Control
• Expansion	1 x Mini PCIe Slot, Optional Supports mSATA

Rear I/O	
• Serial Port	1 x RS-232/422/485 (Optional 2nd COM)
• Ethernet	1 x RJ-45 (Intel® 82574L Gigabit Ethernet, Optional Dual 82574L Gigabit Ethernet)
• VGA	N/A
• HDMI	1 X HDMI
• Audio	Line-out (Realtek ALC892 Supports 5.1-CH Audio)
• USB	2 x USB 2.0 (Optional Extra 2 x USB)
• Mouse & K/B	1 x PS/2 KB & MS
• Speaker	2 x 1W Speaker




i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com

Model: VPC1700AT



Diagram:

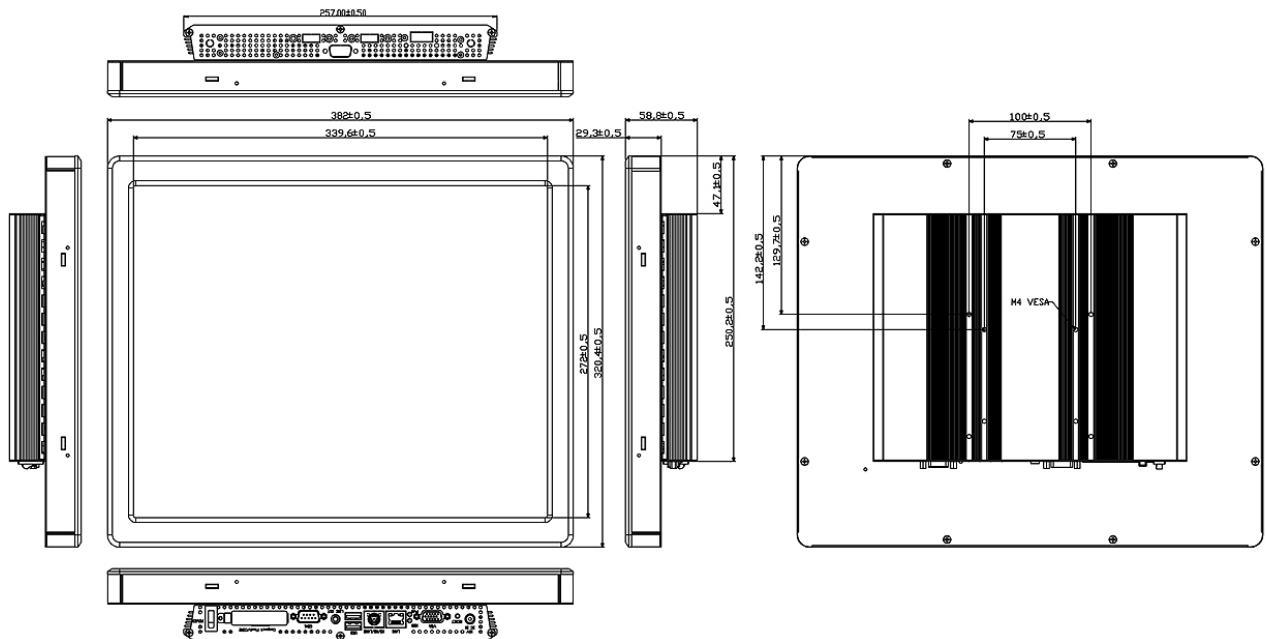

Unit: mm

Environment & Mechanical	
• Color	Front Silver & Rear Panel Black
• Mounting	Wall/ Stand/ VESA 75mm x 75mm and 100mm x 100mm
• System Power Requirement	+12 ~ 28V DC Power Input
• Power Adapter	Input: 100 ~ 250VAC/ 47 ~ 63Hz Output: 60W Adapter (12V @ 5A Adapter)
• Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
• Storage Temperature	-10°C ~ 60°C (14°F ~ 140°F)
• Relative Humidity	5% ~ 90% Relative Humidity, Non-condensing
• Dimensions (W x D x H)	382mm x 320.4mm x 58.8mm
• Weight	5.2Kgs