





Specifications	
Model Name	WCH1500C3
Viewable Size image	15"
Active Display Area (mm)	304.1(H)x228.1(V)
Pixel Pitch(mm)	0.297(H) x 0.297(V)
Number of Pixels	1024x768
Contrast Ratio	500:1 (typ.)
Display Colors	16.2M(6bit+FRC)
Brightness(cd/m )	250 nit
Viewing Angle(CR>=10)	70~70(H); -60~65(V)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW



Remarks: WCH1500C3 series= VGA input only  
 WCH1500C3AV series= VGA+Video Input

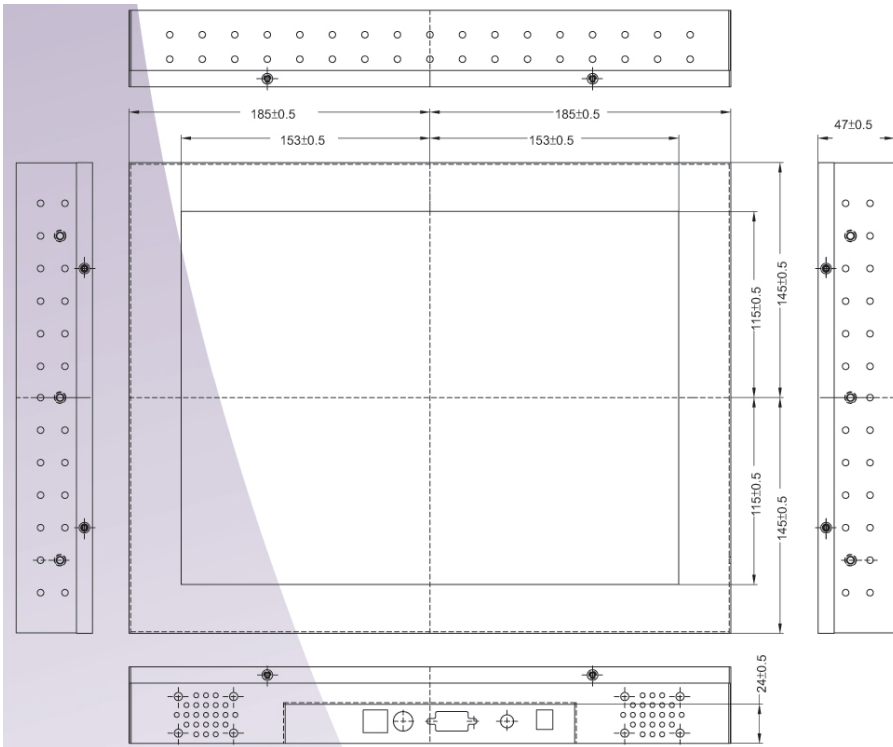

MECHANICAL DRAWING

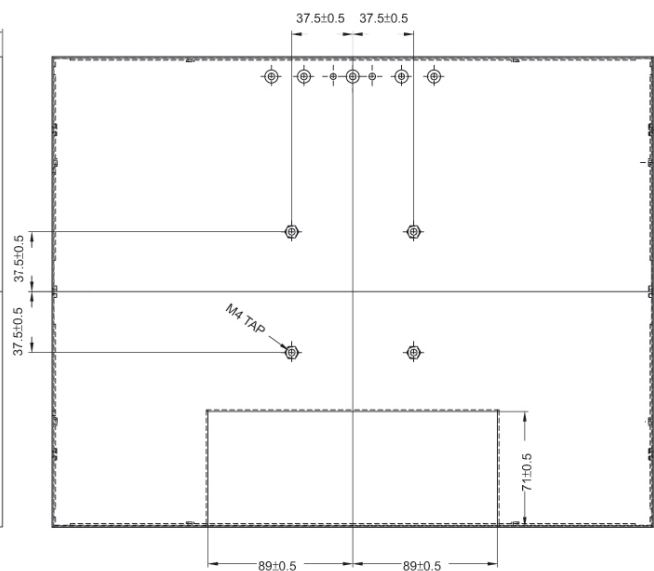

UNIT:mm

\*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

