



Model: WCHHW4200L1-TSAW

42" Widescreen Sunlight Readable Chassis LCD

www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com

| Specifications | |
|---|--------------------------------|
| Model Name | WCHHW4200L1-TSAW |
| Viewable Size Image | 42"(16:9) |
| Active Display Area (mm) | 930.25(H)x523.01(V) |
| Number of Pixels | 1366 x 768 |
| Pixel Pitch(mm) | 0.227x0.681 |
| Display Color | 16.7M(8bit/colors) |
| Contrast Ratio | 1100:1 (typ.) |
| Brightness (nit) | 625* (typ.) |
| Viewing Angle (CR >=10) | -89~89(H);-89~89(V) |
| Synchronization Range Horizontal / Vertical | 31.5~60KHz/60~75Hz |
| Recommended Resolution | 1366x768@60Hz |
| Signal Connector | 15 pin D-sub |
| Power Source | AC 100~240 V, Universal, 10% |
| Power Consumption | 220W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Optional Video Input | S-Video, Composite Video |
| Plug & Play | VESA DDC 1/2B |
| Optional DVI Input | Yes |
| Optional Touch Screen | SAW |
| Optional protection glass (reflection rate<0.5%) | Optional |
| Operation Temperature | 0 o C~50° C |




| Outdoor readability | | | | |
|----------------------------|--------------------------|--------|--------|--------|
| Ambient light(nit) | Brightness measure Angle | 15,000 | 30,000 | 80,000 |
| Brightness gain(BL0n)(nit) | 35° | 650 | 770 | 1060 |
| Reflectance(net)(%) | | 1.00% | 0.90% | 0.70% |





Model: WCHHW4200L1-TSAW

42" Widescreen Sunlight Readable Chassis LCD

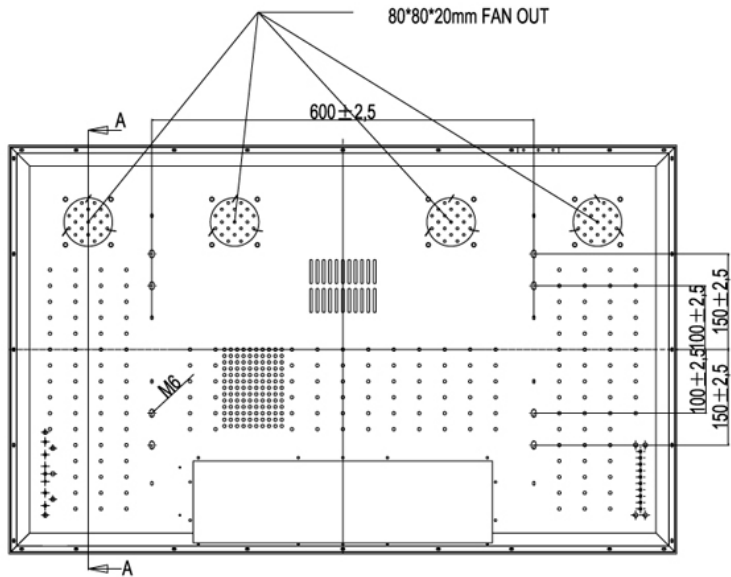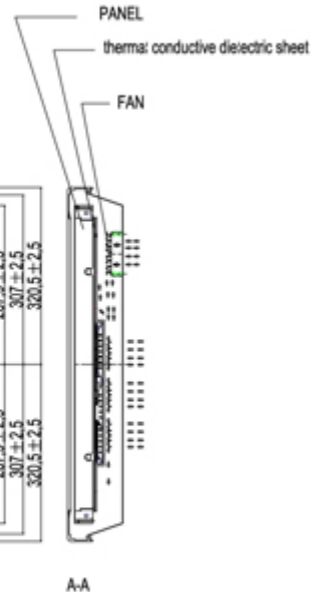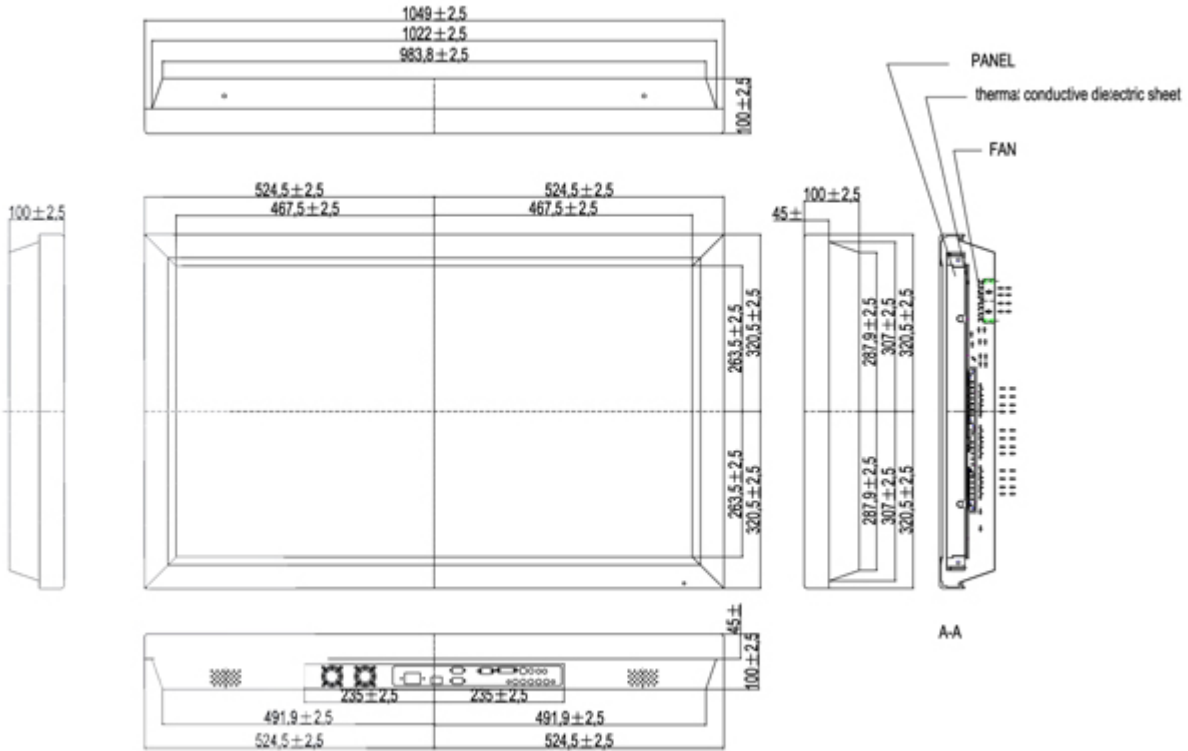

VESA SCREW 600*300 600*200mm

UNIT:mm



i-Tech Company LLC
 TOLL FREE: (888) 483-2418 • EMAIL: info@i-techcompany.com • WEB: www.iTechLCD.com

www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com