

# IP65 FRONT PANEL MOUNT (Metal-5mm)

6.5" High Brightness LCD Monitor, 640 x 480, 700nits, VGA Input, Rear OSD, including rear screw/Clamp/VESA Mount

Model: CPM0650HBIP




## FEATURES:

- IP65 Front Panel Mount (Metal-5mm)
- VGA Input, Rear OSD
- Rear Screw/Clamp/VESA Mount
- Resolution: 640x480
- Brightness: 900nits



## SPECIFICATIONS:


|                                |   |
|--------------------------------|---|
| Panel Size                     | 6.5"  |
| Active Display Area(mm)        | 132.48 (H) x 99.36 (V)  |
| Resolution                     | 640 x 480   |
| Brightness(cd/m2)              | 700 (Typical)   |
| Contrast Ratio                 | 600:1 (Typical)   |
| Viewing Angles(CR>=10 L/R/U/D) | -80~80(H) ; -70~70(V)   |
| Display Colors                 | 262K (6 bits/color)   |
| Standard Input Signal          | 1 x VGA (D-sub 15)<br>1 x HDMI (Type-A)                               |
| Touch Screen(Optional-1)       | Resistive Touch<br>Protective Glass                                   |
| Touch Interface                | USB / RS232   |
| Audio / Speakers (Optional)*   | Audio line in (3.5mm) + Speaker x2                                    |
| OSD                            | 5 Keys: -, +, Power, Esc, Enter                                       |
| Power Input                    | 12V DC input (2.5ψ)<br>with external AC-DC Adapter (100V~240V)        |
| Power Consumption              | 15W typical, Normal operation   |
| Operating temperature          | 0~50°C  |
| Storage Temperature            | -10~60°C  |
| Accessories                    | Power AC-DC Adapter(100V~240V)<br>VGA cable (1.8m)<br>HDMI cable (2m) |

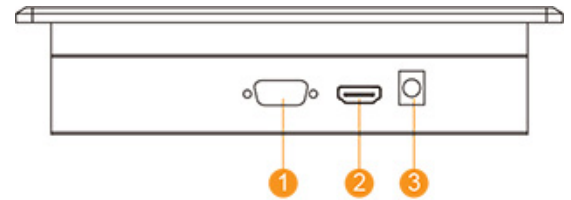

1. VGA
2. HDMI
3. DC input

| I/O Optional |  |
|--------------|--|
| Optional 1*  | 1 x VGA (D-sub 15)<br>1 x HDMI (Type-A)<br>1 x DVI-D |

## MECHANICAL DRAWING:

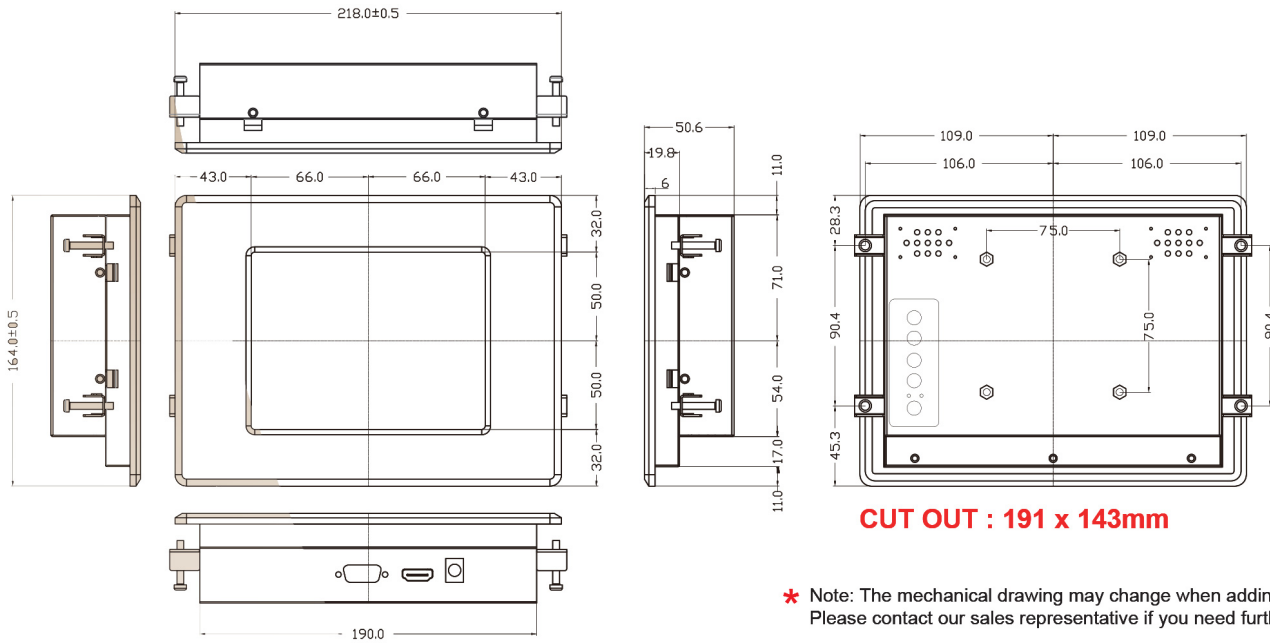

\* Note: The mechanical drawing may change when adding touch screen.  
Please contact our sales representative if you need further product information.