

# IP65 FRONT PANEL MOUNT (Metal-5mm)

19" LCD monitor, 1280 x 1024, 250nits, VGA Input  
Rear OSD, including rear screw/Clamp/VESA Mount

**MODEL: CPM1900IP**




## FEATURES:

- IP65 Front Panel Mount (Metal-5mm)
- VGA Input, Rear OSD
- Rear Screw/Clamp/VESA Mount
- Resolution: 1280x1024
- Brightness: 250nits



## SPECIFICATIONS:

|                                |   |
|--------------------------------|---|
| Panel Size                     | 19"   |
| Active Display Area(mm)        | 376.32(H)x301.06(V)   |
| Resolution                     | 1280 x 1024   |
| Brightness(cd/m2)              | 250 (Typical)   |
| Contrast Ratio                 | 1000:1 (Typical)  |
| Viewing Angles(CR>=10 L/R/U/D) | -85~85(H) ; -80~80(V)   |
| Display Colors                 | 16.2M (8 bits/color)  |
| Standard Input Signal          | 1 x VGA (D-sub 15)<br>1 x HDMI (Type-A)                               |
| Touch Screen(Optional-1)       | Resistive Touch<br>Protective Glass                                   |
| Touch Screen(Optional-2)       | SAW Touch (Surface Acoustic Wave)                                     |
| Touch Interface                | USB / RS232   |
| Audio / Speakers (Optional)*   | Audio line in (3.5mm) + Speaker x2                                    |
| OSD                            | 5 Keys: -, +, Power, Esc, Enter                                       |
| Power Input                    | 12V DC input (2.5ψ)<br>with external AC-DC Adapter (100V~240V)        |
| Power Consumption              | 27W typical, Normal operation   |
| Operating temperature          | 0~50°C  |
| Storage Temperature            | -10~60°C  |
| Accessories                    | Power AC-DC Adapter(100V~240V)<br>VGA cable (1.8m)<br>HDMI cable (2m) |

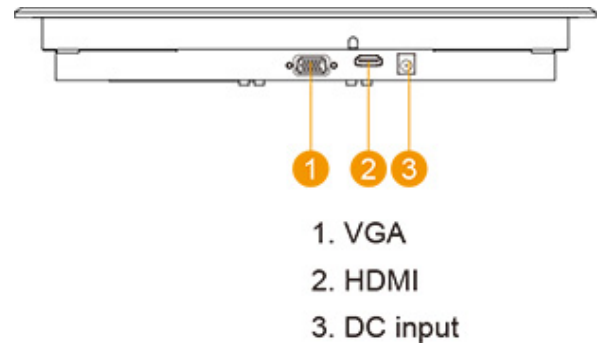

| I/O Optional       |   |
|--------------------|---|
| <b>Optional 1*</b> | 1 x VGA (D-sub 15)<br>1 x HDMI (Type-A)<br>1 x DVI-D            |
| <b>Optional 2*</b> | 1 x VGA (D-sub 15)<br>1 x DVI-D<br>1 x S-Video<br>1 x Composite |

