

IP65 FRONT PANEL MOUNT (Metal-5mm)

19" LCD monitor, 1280 x 1024, 300nits, VGA Input
Rear OSD, including rear screw/Clamp/VESA Mount
Wide Viewing with 5 Wire Resistive Touch Screen
and USB Controller

MODEL: CPM1900WVIP-TR



FEATURES:

- IP65 Front Panel Mount (Metal-5mm)
- VGA Input, Rear OSD
- Rear Screw/Clamp/VESA Mount
- Resolution: 1280x1024
- Brightness: 300nits



SPECIFICATIONS:



Panel Size	19"
Active Display Area(mm)	376.32(H)x301.06(V)
Resolution	1280 x 1024
Brightness(cd/m2)	300 (Typical)
Contrast Ratio	2000:1 (Typical)
Viewing Angles(CR>=10 L/R/U/D)	-89~89(H) ; -89~89(V)
Display Colors	16.2M (8 bits/color)
Standard Input Signal	1 x VGA (D-sub 15) 1 x HDMI (Type-A)
Touch Screen(Optional-1)	Resistive Touch Protective Glass
Touch Screen(Optional-2)	SAW Touch (Surface Acoustic Wave)
Touch Interface	USB / RS232
Audio / Speakers (Optional)*	Audio line in (3.5mm) + Speaker x2
OSD	5 Keys: -, +, Power, Esc, Enter
Power Input	12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V)
Power Consumption	54W typical, Normal operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	Power AC-DC Adapter(100V~240V) VGA cable (1.8m) HDMI cable (2m)



1. VGA
2. HDMI
3. DC input

I/O Optional	
Optional 1*	1 x VGA (D-sub 15) 1 x HDMI (Type-A) 1 x DVI-D
Optional 2*	1 x VGA (D-sub 15) 1 x DVI-D 1 x S-Video 1 x Composite

MECHANICAL DRAWING:

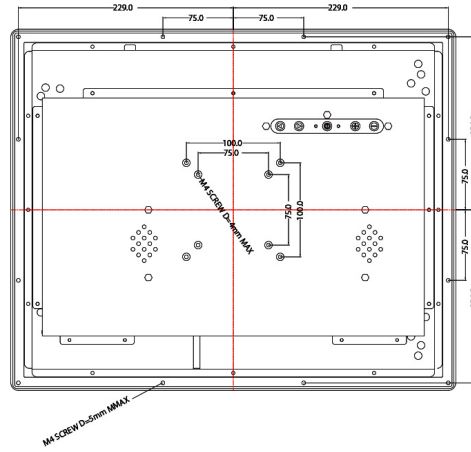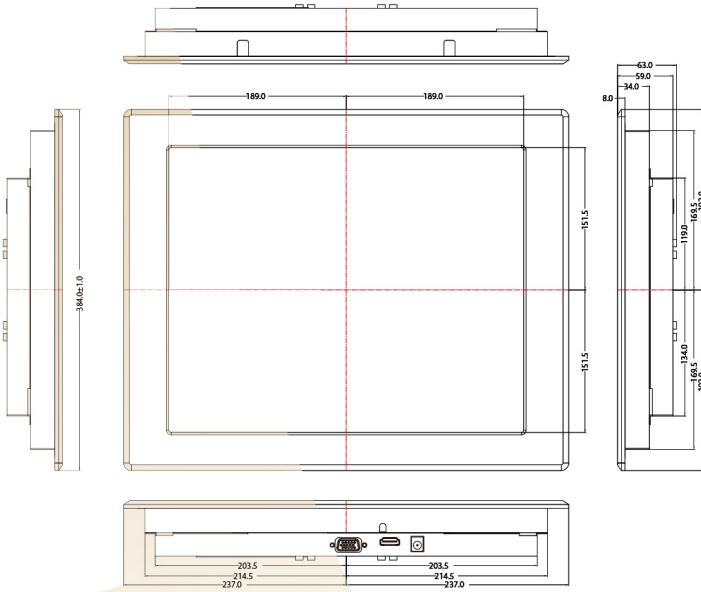

UNIT:mm

CUT OUT : 446 x 356mm

- * Note: The mechanical drawing may change when adding touch screen. Please contact our sales representative if you need further product information.