



# Teleprompter LCD Display

Reverses images internally with no special equipment or software needed

20" LCD Display, 300 nits SXGA 1600(H)x1200(V) resolution.  
VGA + composite- BNC +DVI

Model: **PCH2000S**



## Mirror Image Features






Reverses images internally - no special equipment or software needed!!

## Specifications:

Viewable Size image	20.1"	Recommended Resolution	1600x1200@ 60Hz
Active Display Area (mm)	408.0(H)x306.0(V)	Signal Connector	15 pin D-Sub
Pixel Pitch(mm)	0.255(H)x0.255(V)	Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Number of Pixels	1600x1200(UXGA)	Power Consumption	60W typical, normal operation
Contrast Ratio	800:1 (typ.)	Power Management	VESA DPMS Compliant
Display Colors	16.7M(8bit/colors)	Plug & Play	VESA DDC 1/2B
Brightness(cd/m )	300	Optional Video Input	S-Video, Composite
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)	Optional DVI Input	Yes
Synchronization Range		Optional Touch Screen	SAW, Resistive
Horizontal/Vertical	31.5~80.0KHz/60~75Hz		
Horizontal/Vertical			



Mechanical Drawings:

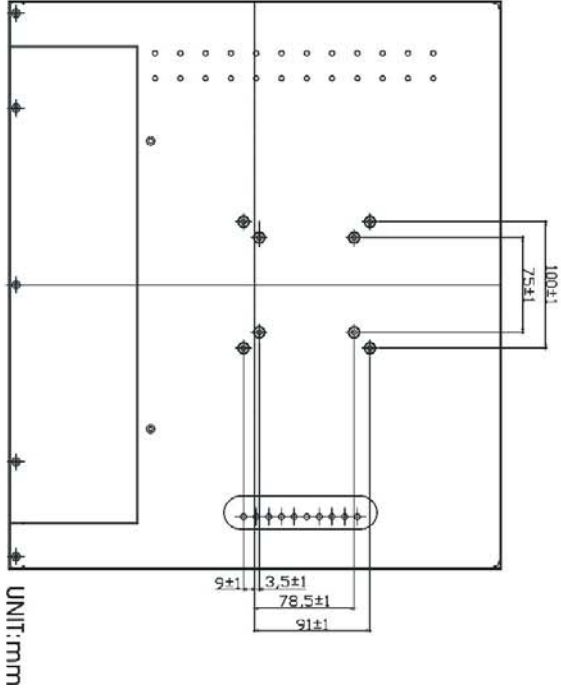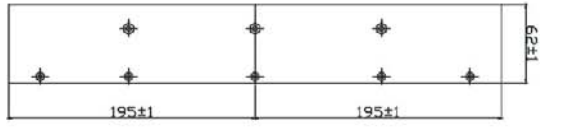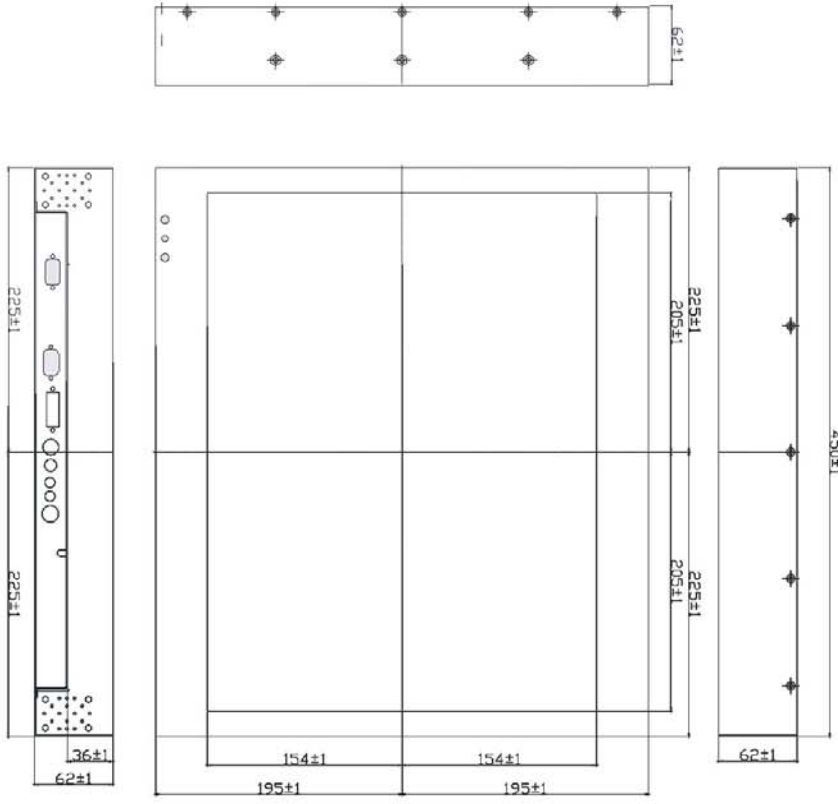

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.