





Specifications	
Model Name	WCH1210M2
Viewable Size image	12.1"
Active Display Area (mm)	245.76(H)x184.32(V)
Pixel Pitch(mm)	0.240(H)x0.240(V)(typ.)
Number of Pixels	1024x768
Contrast Ratio	700:1 (typ.)
Display Colors	262,144 (6bits/color)
Brightness(cd/m )	500 nit
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)(typ.)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive



Remarks: WCH1210M2 series= VGA input only  
 WCH1210M2AV series= VGA+Video Input

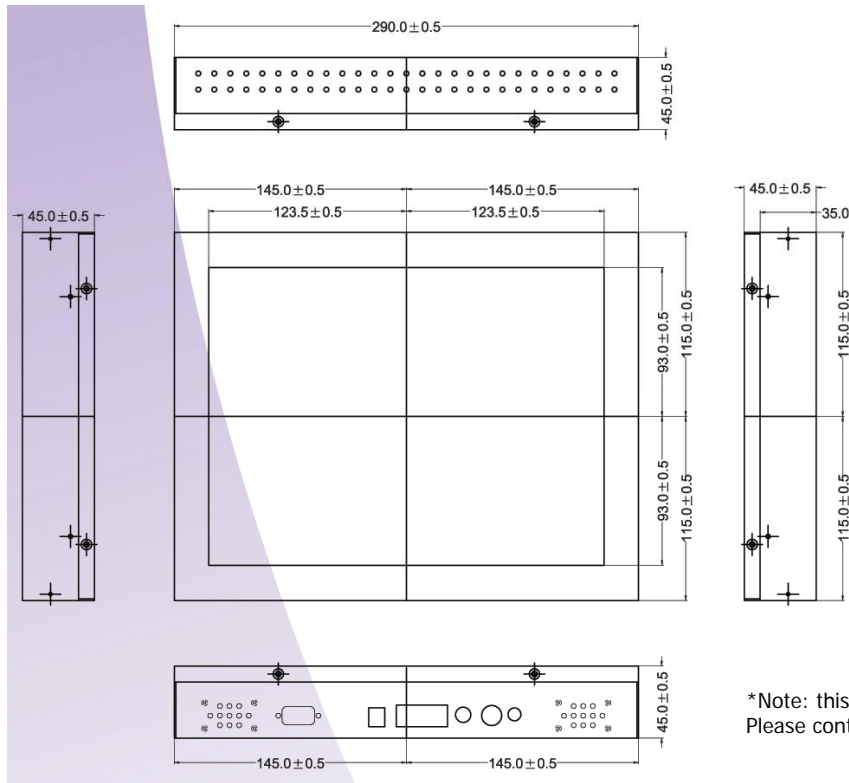

### MECHANICAL DRAWING

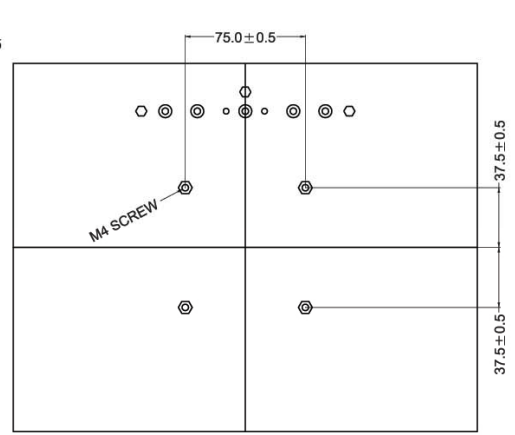

UNIT:mm

\*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

