




Specifications


Model Name	WCH1500A2
Viewable Size image	15"
Active Display Area (mm)	304.128 (H) x 228.096 (V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Colors	16.2M(6bits+FRC)
Brightness(cd/m)	350 (typ.)
Viewing Angle(CR>=10)	-80~80 (H); -80~60 (V)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW



Remarks: WCH1500A2 series= VGA input only
WCH1500A2AV series= VGA+Video Input

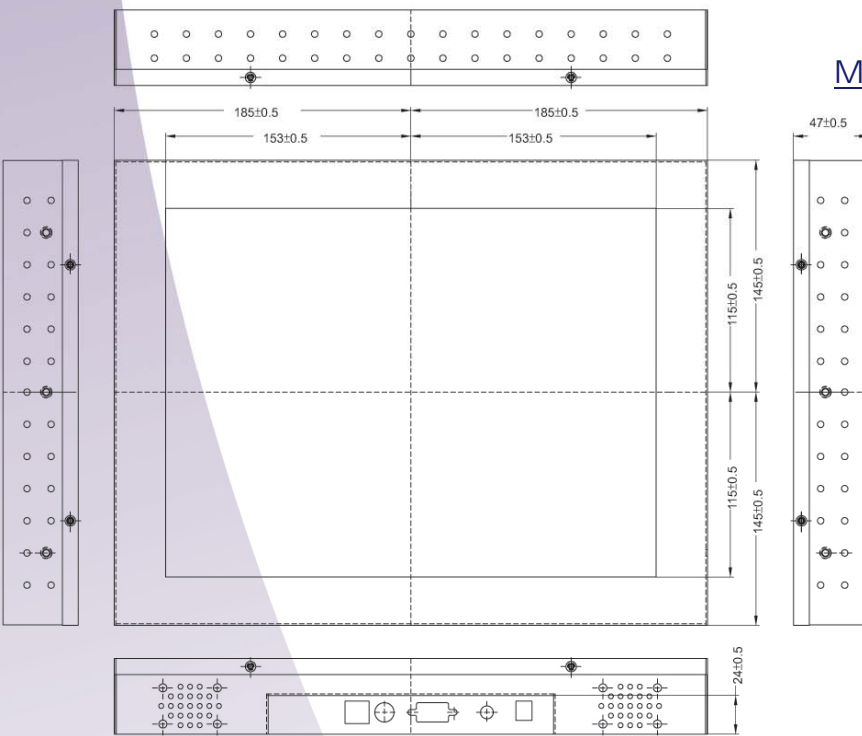

MECHANICAL DRAWING

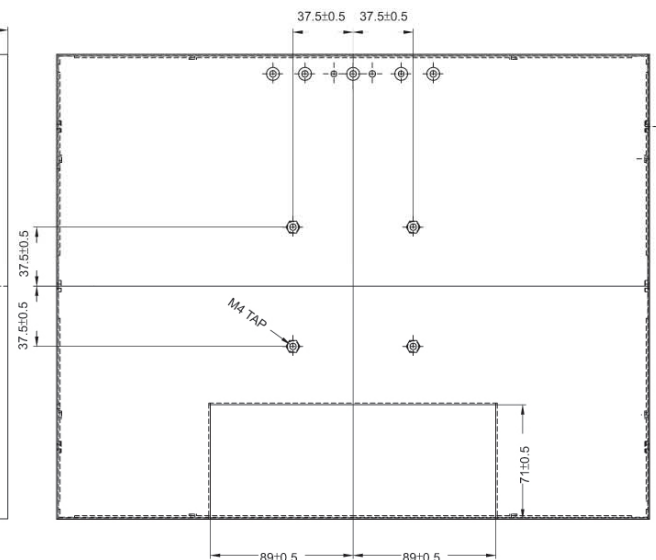

UNIT:mm

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com