

Sunlight Readable Chassis Mount LCD


Specifications	
Model Name	WCHH1700A1
Viewable Size image	17"
Active Display Area (mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280 x 1024
Contrast Ratio	1000:1 (typ.)
Display Color	16.7M
Brightness(cd/m2)	550 (typ.)
Viewing Angle(CR>=10)	-85~85(H); -80~80(V)
Synchronization Range (Horizontal / Vertical)	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280 x 1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	32W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW



Remarks: WCHH1700A1 = VGA input only
 WCHH1700A1AV = VGA+Video Input



MECHANICAL DRAWING

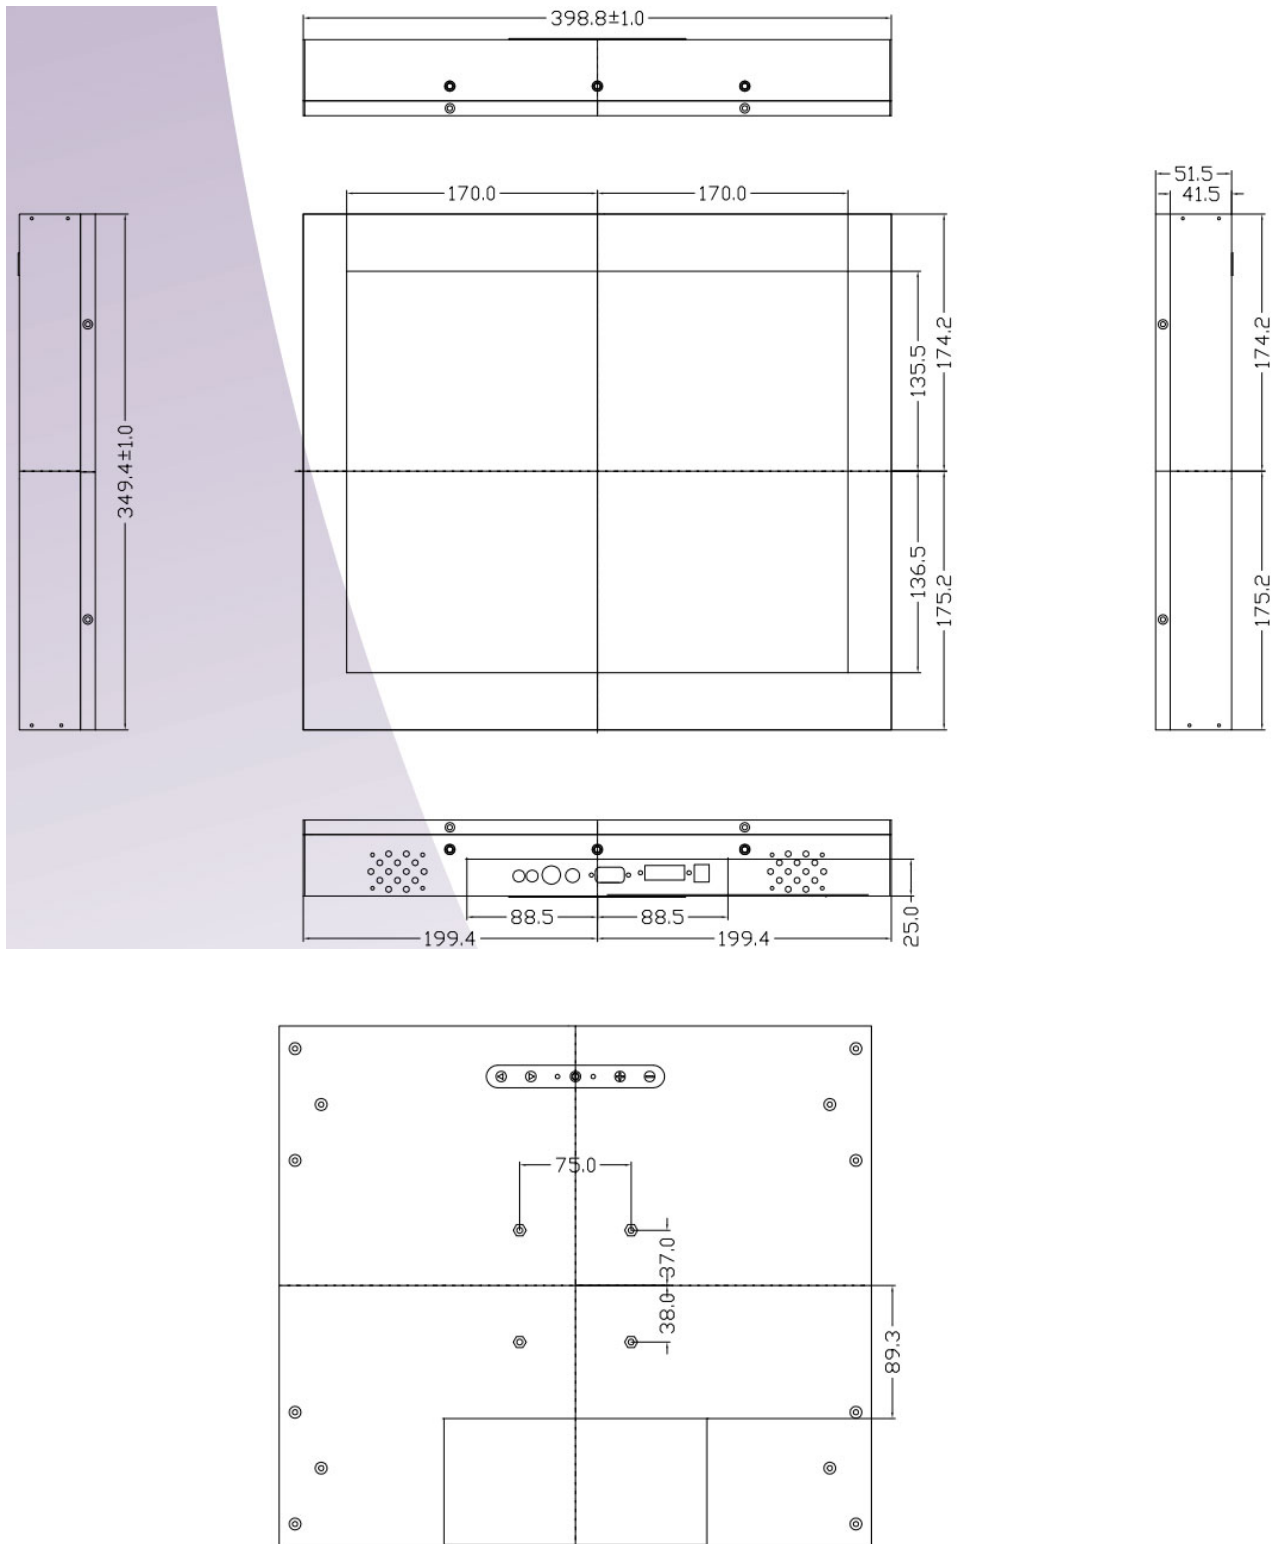

Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com