

Chassis Monitor

Sunlight Readable Chassis Monitor



19"

Specifications




Model Name	WCHH1900A1
Viewable Size Image	19"
Active Display Area (mm)	376.32(H)x301.06(V)
Pixel Pitch (mm)	0.294(H)x0.294(V)
Number of Pixels	1280x1024
Contrast Ratio	550:1 (typ.)
Display Color	16.2M(6bits+FRC)
Brightness (cd/m ²)	500
Viewing Angle (CR >=10)	-70~70(H); -60~75(V)
Synchronization Range	31.5~80.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1280x1024@ 60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC 100~240V, Universal, ±10%
Power Consumption	35W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW

Remarks: WCHH1900A1 = VGA Input only
 WCHH1900A1AV = VGA + Video Input

Outdoor readability

Ambient light (nit)	Brightness measure Angle	10,000	30,000	80,000
Brightness gain (BL0n) (nit)	35°	500	630	830
Reflectance (net) (%)		0.5%	0.65%	0.4%

Mechanical Drawing

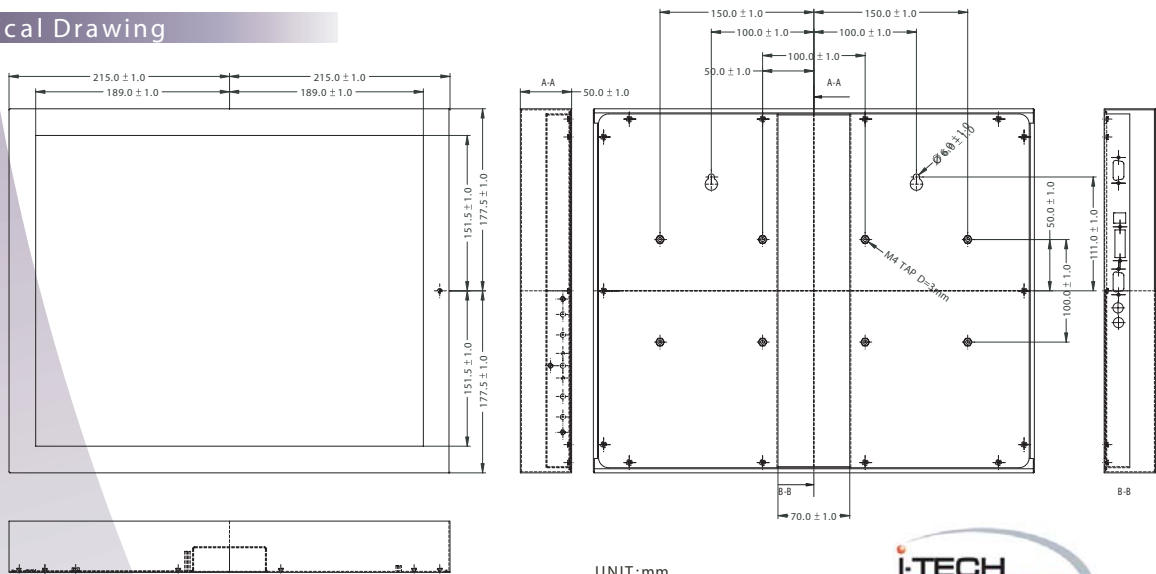

UNIT:mm