

# Sunlight Readable Chassis Mount LCD


Specifications	
Model Name	WCHHW4200L2
Viewable Size image	42" (16:9)
Active Display Area (mm)	930.24 (H) x 523.26 (V)
Pixel Pitch(mm)	0.4845
Number of Pixels	1920x1080
Contrast Ratio	4000:1(typ.)
Display Color	16.7M(8bits/color)
Brightness(cd/m2)	540 (typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range (Horizontal / Vertical )	31.5~91.1KHz/50~85Hz
Recommended Resolution	1920 x 1080 @60Hz
Input Signal	VGA (D-sub) DVI-D HDMI Composite (BNC) S-video In (Mini Din 4 Pin) Component (BNC) Audio RJ-45 (For Remote Control) RS232 (For Remote Control)
Output Signal	VGA (D-sub) Video CBNC) Audio RS232 (For Remote Control)
Internal Speaker	10W+10W
Power Source	AC100-240V, Universal, 10%
Optional Touch Screen	SAW/ Optical (2 points)
Operating Temperature	5~40degC
Operating Humidity	20-80% (without condensation)
Dimension	991.6 x 584 x 115.5 mm
VESA compatible arm mounting interface	200 x 200 mm/ 400 x 200mm



**Remarks:** WCHHW4200L2 = VGA input only  
WCHHW4200L2AV = VGA+Video Input



# MECHANICAL DRAWING

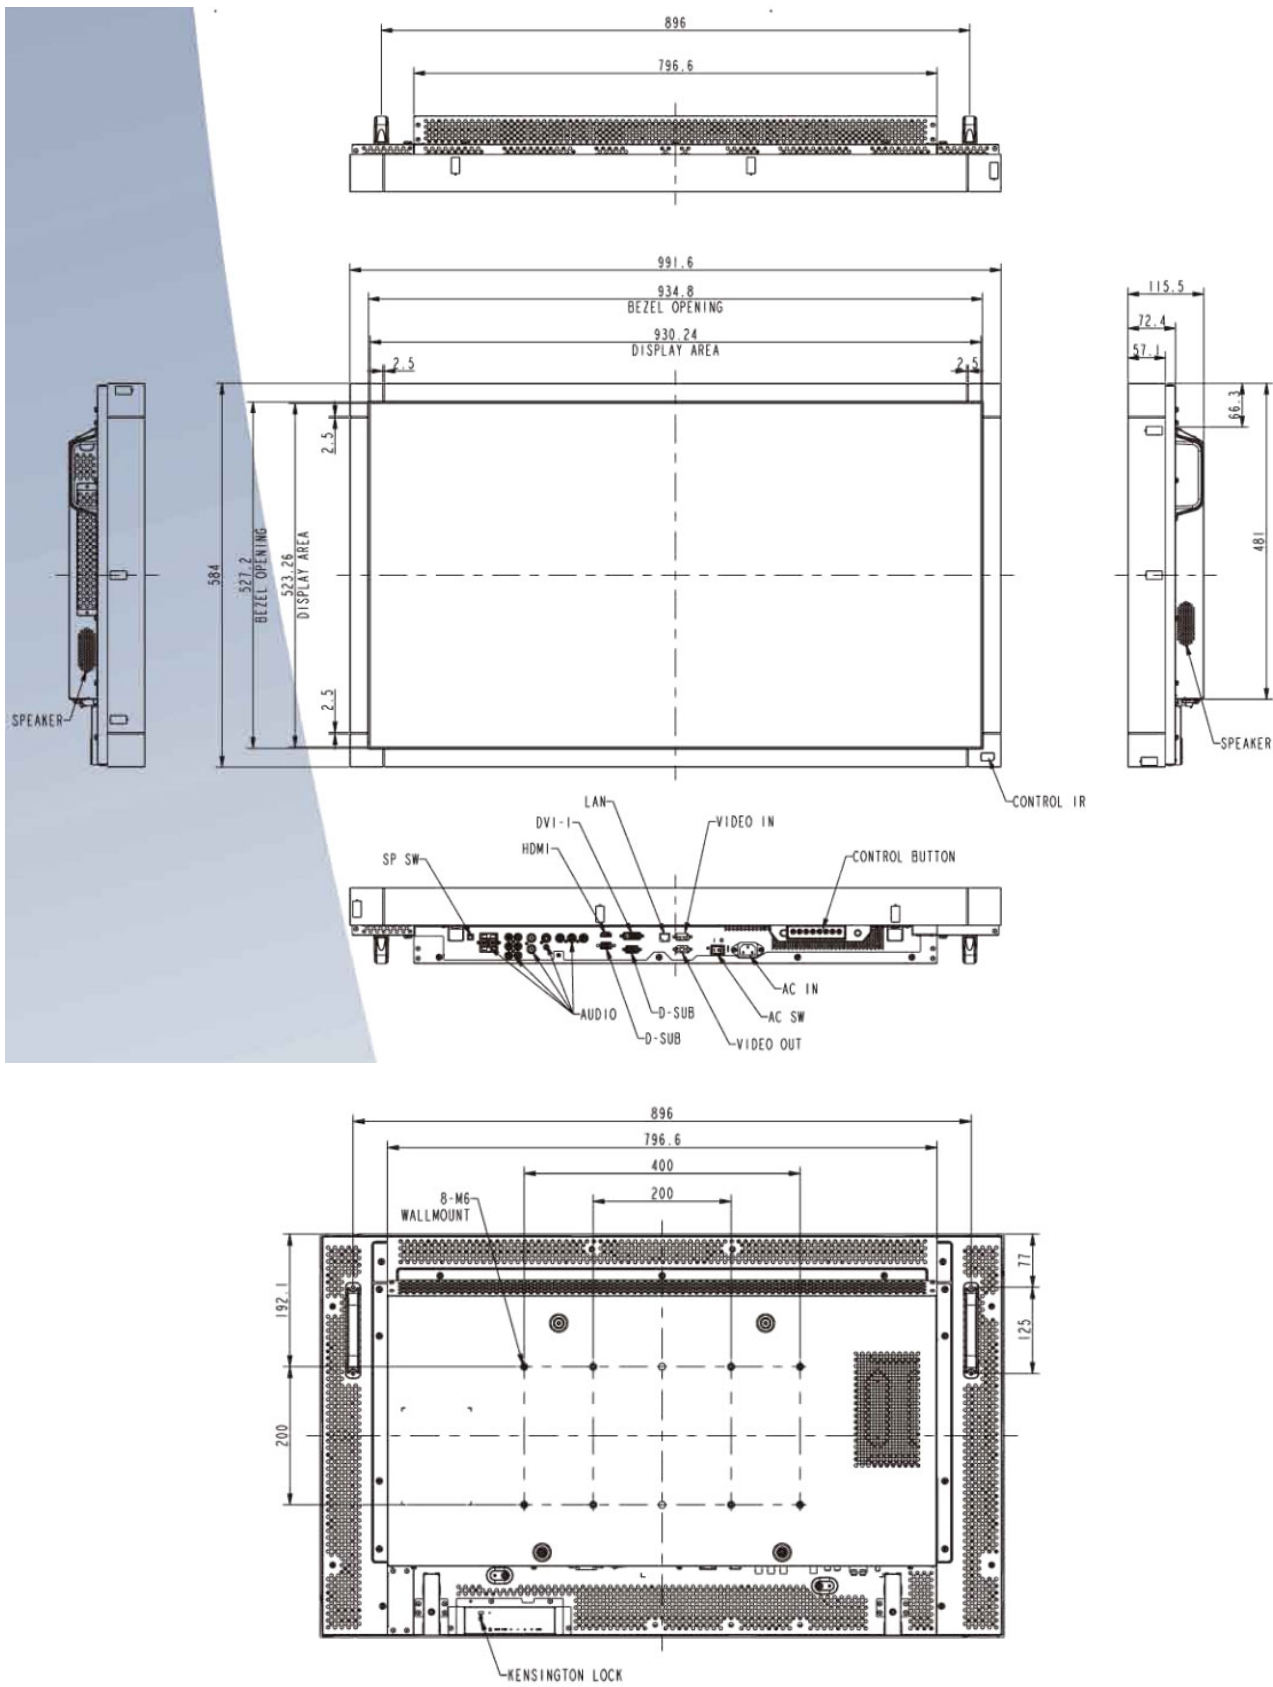

Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)