



**Model:**  
**WCHHW4700L1**

# 47" Widescreen Sunlight Readable Chassis LCD

Specifications	
Model Name	WCHHW4200L1
Viewable Size Image	47"(16:9)
Active Display Area (mm)	1039.68(H) x 584.82(V)
Number of Pixels	1920 x 1080
Pixel Pitch(mm)	0.5415 x 0.5415
Display Color	16.7M(8bit/colors)
Contrast Ratio	800:1 (typ.)
Brightness (nit)	688(typ.)
Viewing Angle (CR >=10)	-89~89(H);-89~89(V)
Synchronization Range Horizontal / Vertical	31.5~75KHz/56~60Hz
Recommended Resolution	1920x1080@60Hz Signal
Signal Connector	15 pin D-sub
Power Source	AC 100~240 V, Universal, 10%
Power Consumption	320W typical, normal operation
Power Management	VESA DPMS Compliant
Optional Video Input	S-Video, Composite Video
Plug & Play	VESA DDC 1/2B
Optional DVI Input	Yes
Optional Touch Screen	-
Optional protection glass	(reflection rate<0.5%) Anti- reflective glass
Operation Temperature	0 o C~50° C

Outdoor readability				
Ambient light(nit)	Brightness measure Angle	10,000	30,000	80,000
Brightness gain(BL0n)(nit)	35°	688	820	1100
Reflectance(net)(%)		0.85%	0.7%	0.68%







**Toll Free: 1-888-itech-18 Fax: 1-510-372-2736 E-mail: infor@i-techcompany.com**



**Model:**  
**WCHHW4700L1**

# 47" Widescreen Sunlight Readable Chassis LCD

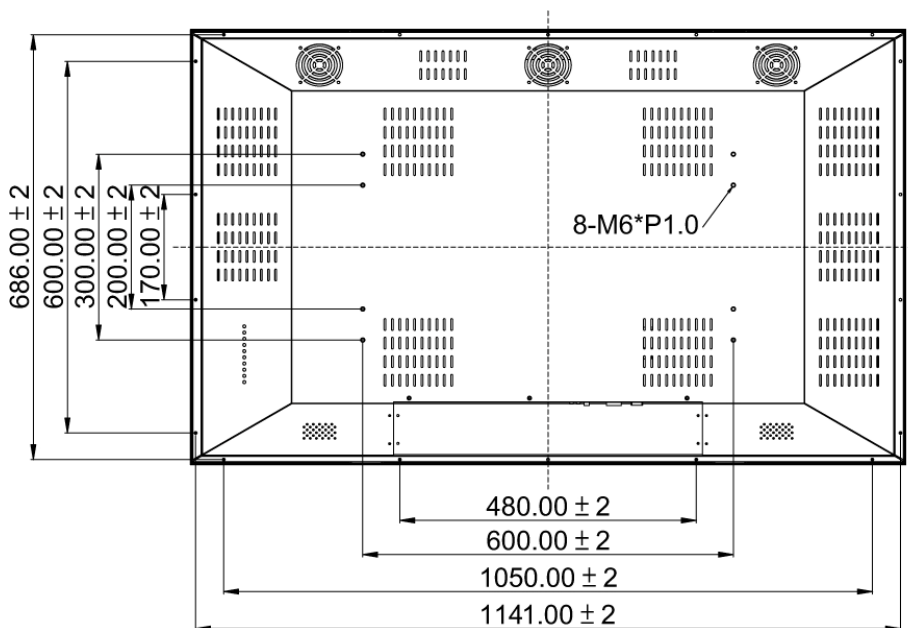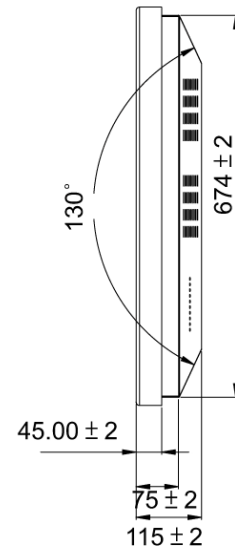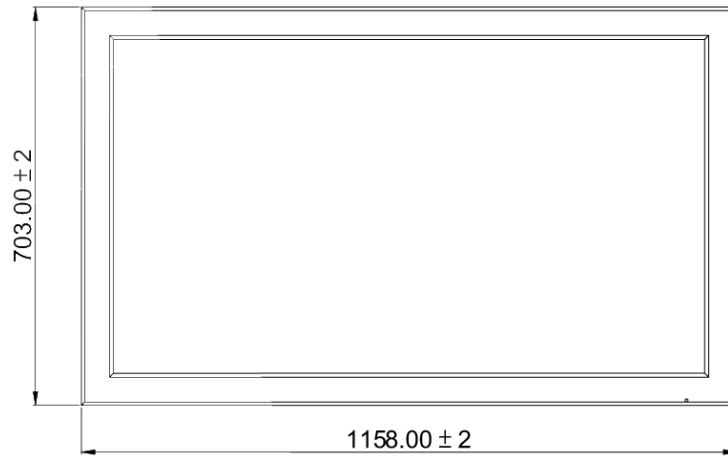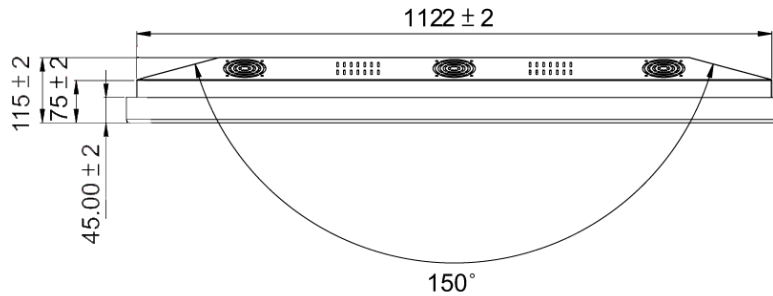

**Toll Free: 1-888-itech-18 Fax: 1-510-372-2736 E-mail: infor@i-techcompany.com**

www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com www.i-techcompany.com