

# Chassis Touch Monitor

## Chassis Touch Monitor



### 23"(16:9)

#### Specifications


**RoHS**  
COMPLIANT  
2002/95/EC

Model Name	WCHW2300L1
Viewable Size Image	23"(16:9)
Active Display Area (mm)	501.12(H)x300.67(V)
Pixel Pitch (mm)	0.1305mmx0.3915mm
Number of Pixels	1280x768
Contrast Ratio	400:1 (typ.)
Display Color	16.7M(8bit/colors)
Brightness (cd/m <sup>2</sup> )	450
Viewing Angle (CR >=10)	-88~88(H); -88~88(V)
Synchronization Range	31.5~52KHz/56~60Hz
Horizontal/Vertical	
Recommended Resolution	1280x768@ 60Hz
Signal Connector	15 pin D-sub
Power Source	AC 100~240V, Universal, ±10%
Power Consumption	43W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	SAW

Remarks: WCHW2300L1 = VGA Input only

WCHW2300L1AV = VGA+Video Input

#### Mechanical Drawing

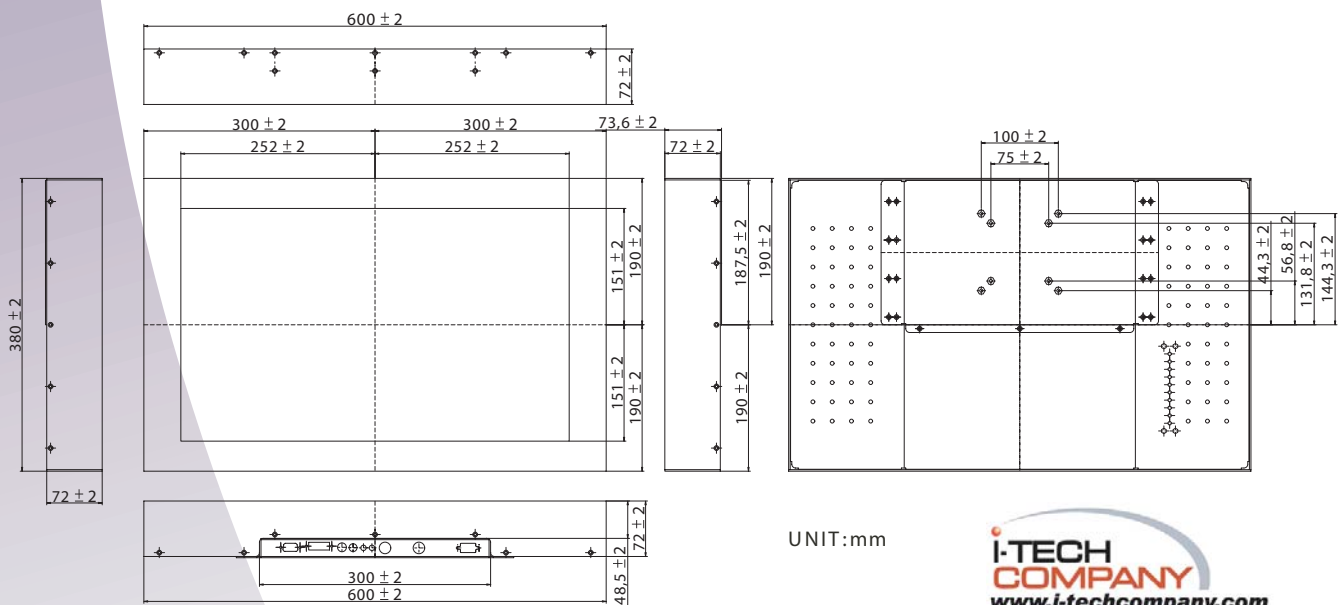

**I-TECH**  
**COMPANY**  
[www.i-techcompany.com](http://www.i-techcompany.com)  
Toll Free: 1-888-483-2418  
USA: 1-510-429-9288  
Fax: 1-510-372-2736